

TOSHIBA



Super-MMS

Engineering Data Book

Super Modular Multi System

The engineering data book details all relevant data, charts and drawings to enable you to get the best performance from the Toshiba Super Modular Multi System for the various applications.

The information is aimed to assist you by providing greater detail of the system and the wider applications that the system will cover.

It is recommended the use of the data book is used in accordance with the following as references.

Design manual : File No.A03-008

Installation manual : File No.A03-012

Service manual : File No.A03-009

1	Foreword	1
2	Contents	2
3	Introduction	5
4	System overview	9
5	Capacity compensation chart	21
6	Piping requirements	29
7	Refrigerant cycle diagram	35
8	Sensible capacity table	45
9	Part load performance	71
10	Wiring guideline	85
11	Wiring diagram	95
	A. Connection schematic (field wiring)	
	B. Inner circuit	
12	Controls	111
13	Fan characteristics	133
	A. Static pressure	
	B. Air velocity profile (Air throw distance chart)	
14	Sound characteristics (NC curve)	143
15	Dimensional drawing	163
	A. Indoor units	
	B. Outdoor units	
16	Specifications	189
	1. 50Hz models	
	2. 60Hz models	

Appendix

High Wall Type (2 series)

1-Way Air Discharge Cassette Type (2 series)

Slim Duct Type



Introduction

3 Introduction

World's Best Technology for Energy Saving System


Toshiba has attained the pinnacle of world technology in all aspects of efficiency, durability, and comfort.

3



High performance new bell mouth (Smooth bell mouth)

Enlarged suction R



Enlarged suction R allows smoother flow.

High efficiency DC fan motor


High output/
high efficiency
DC motor



+ Output 600W
+ Sine wave drive

New large diameter propeller fan (Flash wing fan)


Reversed circular blade



Enlarged fan diameter $\phi 630 \rightarrow \phi 710$

The reversed circular form reduces the interference of the flow between the blades, and the backward vortex.

High efficiency heat transfer pipe R410A



Configuration of heat transfer pipe

AI dual inverter system

High speed calculation vector control inverter

High efficiency DC twin rotary compressor

World's first core technology: each module (singular outdoor unit) is installed with two (dual) DC twin rotary compressors that work effectively with the highly efficient refrigerant R410A. The system operates in the most optimum pattern for both energy saving and reliability.

-Installation Work:

Less Piping Material and Higher Efficiency



Smaller piping diameters than ever before. This is due to the all inverter type dual compressors, Automatic configuration of outdoor unit.

Improved reliability with identical casing



Each outdoor unit (1 module) is of the same size and design. Therefore the basic installation work will be identical. The unit has been designed for your convenience, so it is possible to fit the unit comfortably into a standard size elevator.

* All our compressors are inverter type


Cost Saving of Piping Material

Less piping work

Efficient Installation Work


Automatic low-noise mode, only possible where dual inverter type compressors are used.

From the weather data of the Japanese Mechanical and Electrical Engineers building in the year 2000. Tokyo (8:00 21:00) remote control temperature setting at 27°C

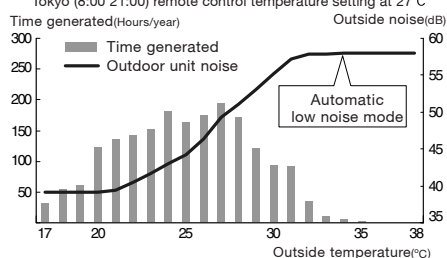

High efficiency DC twin rotary compressor


DC twin rotary compressors are most congenial with R410A and are used within the outdoor units. (Conversion to all inverter type)

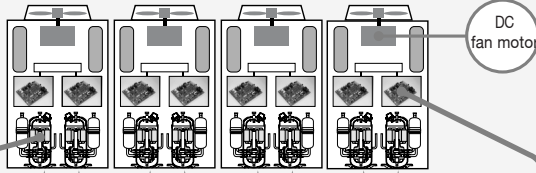

DC twin rotary compressor installed on all the outdoor units for combined use (Conversion to all inverter type)

Active oil control



Oil control is the key to the reliability.



Compression structure by the rotation of the rollers inside the fixed cylinder allows the easy supply of oil to the swaying surface. The compressing rollers move in the same direction as the rotary shaft. This creates a force in the direction of compression even at high compression. Thus high efficiency and reliability are attained.


- Weight (Compared with the conventional unit) **67%**
- Volume (Compared with the conventional unit) **61%**
- Congenial with high pressure refrigerant R410A **Force on the vertical shaft (roller) is small.**
- Range of rotation **15-120rps**
- Compressor efficiency **See diagram on the right**
- Oil discharge (ratio) **1/40 (of the conventional unit)**

High-speed Calculation Vector Control Inverter



Therefore, all the compressor units can operate equally.

e.g. in case of a workload of 2 compressor units;



As both heat exchangers on the 2 outdoor units are usable, higher energy-saving (higher efficiency) can be achieved.

The sequence of the first compressors start up, changes whenever switching on.

Master/Follower	No Need
Part load COP	Higher COP
Compressor start	Equal start chance

today $\rightarrow 1 \rightarrow 3 \rightarrow 4 \rightarrow 2$
 tomorrow $\rightarrow 2 \rightarrow 4 \rightarrow 3 \rightarrow 1$
 the day after $\rightarrow 1 \rightarrow 2 \rightarrow 3 \rightarrow 4$
 tomorrow $\rightarrow$

Through avoiding concentration of the load at an individual unit, prevention of failure and improvement of reliability are achieved.

COP

Super-MMS (410A) *1

10HP System 3.80

20HP System 3.55


Leading the world with high efficiency and high COP in both 1:1 system and VRF system.

Super-MMS (8HP) **4.10** *1 high-level

-Design Work:

Flexible to meet the sophisticated condition of buildings or various customer requirements

The longest piping in the industry enabling a flexible floor design.

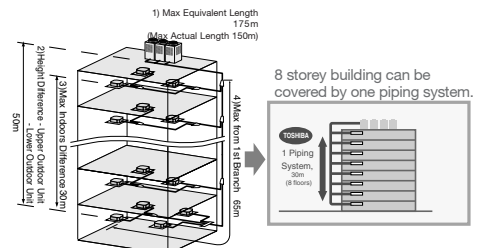


	1)		2)		3)	4)		
	Max Equivalent Length	Max Actual Length	Height Difference		Max Indoors Difference	Max from 1st Branch	Total Extension	Max Connectable Indoor Units
			Upper Outdoor Unit	Lower Outdoor Unit				
Super MMS	175m	150m	50m	40m	30m	65m	300m	48units


Super MMS enable flexible branching.

You may change branching at installation sites.

"Header branch after Y joint" according to original plan, but



Super MMS can quickly satisfy such a requirement as addition of extra indoor unit(s)...



High level, Energy saving VRF System

Super MMS will offer the best solution for the customers requirements as well as consideration of ecology, with the unique technologies and advantages.




System overview

1. OUTLINE OF TOSHIBA SUPER MMS (Super Modular Multi System)


◆ Shortest route design by free branching

The Combination of line and header branching is highly flexible. Following the shortest design route possible, thereby saving on installation time and cost. Line/header branching after the header branching is only available with TOSHIBA Super MMS.


Line branching

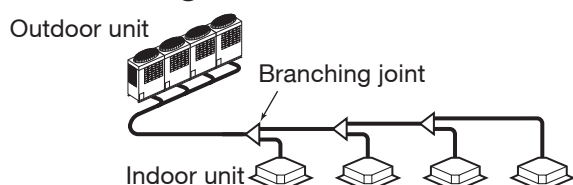


Header branching

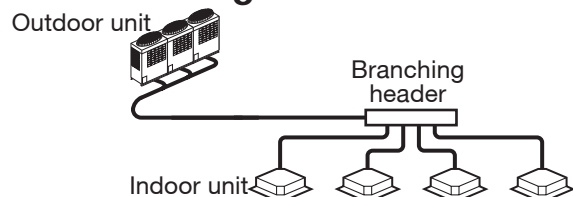



Line + Header branching

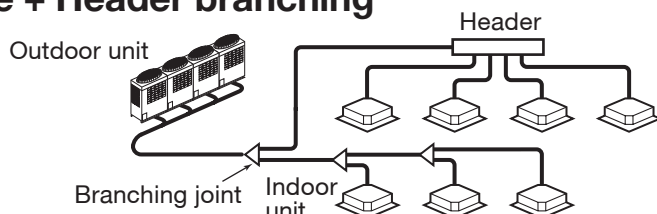


Line branching after header branching

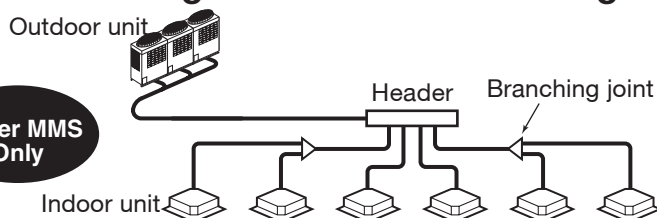


Header branching after header branching

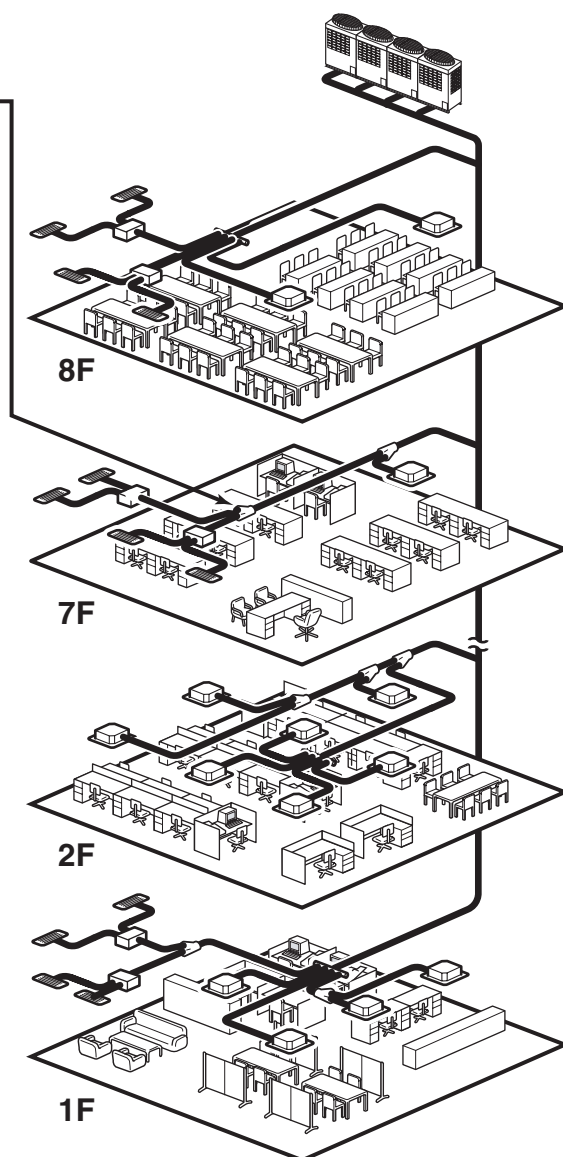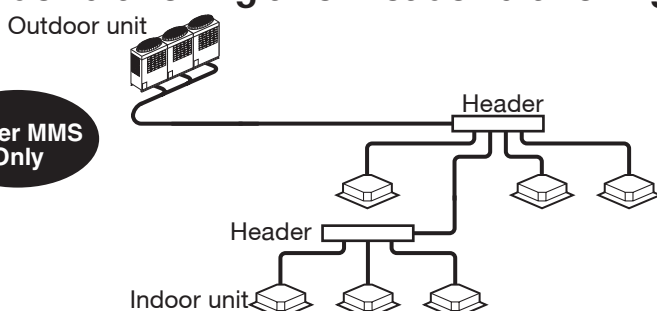

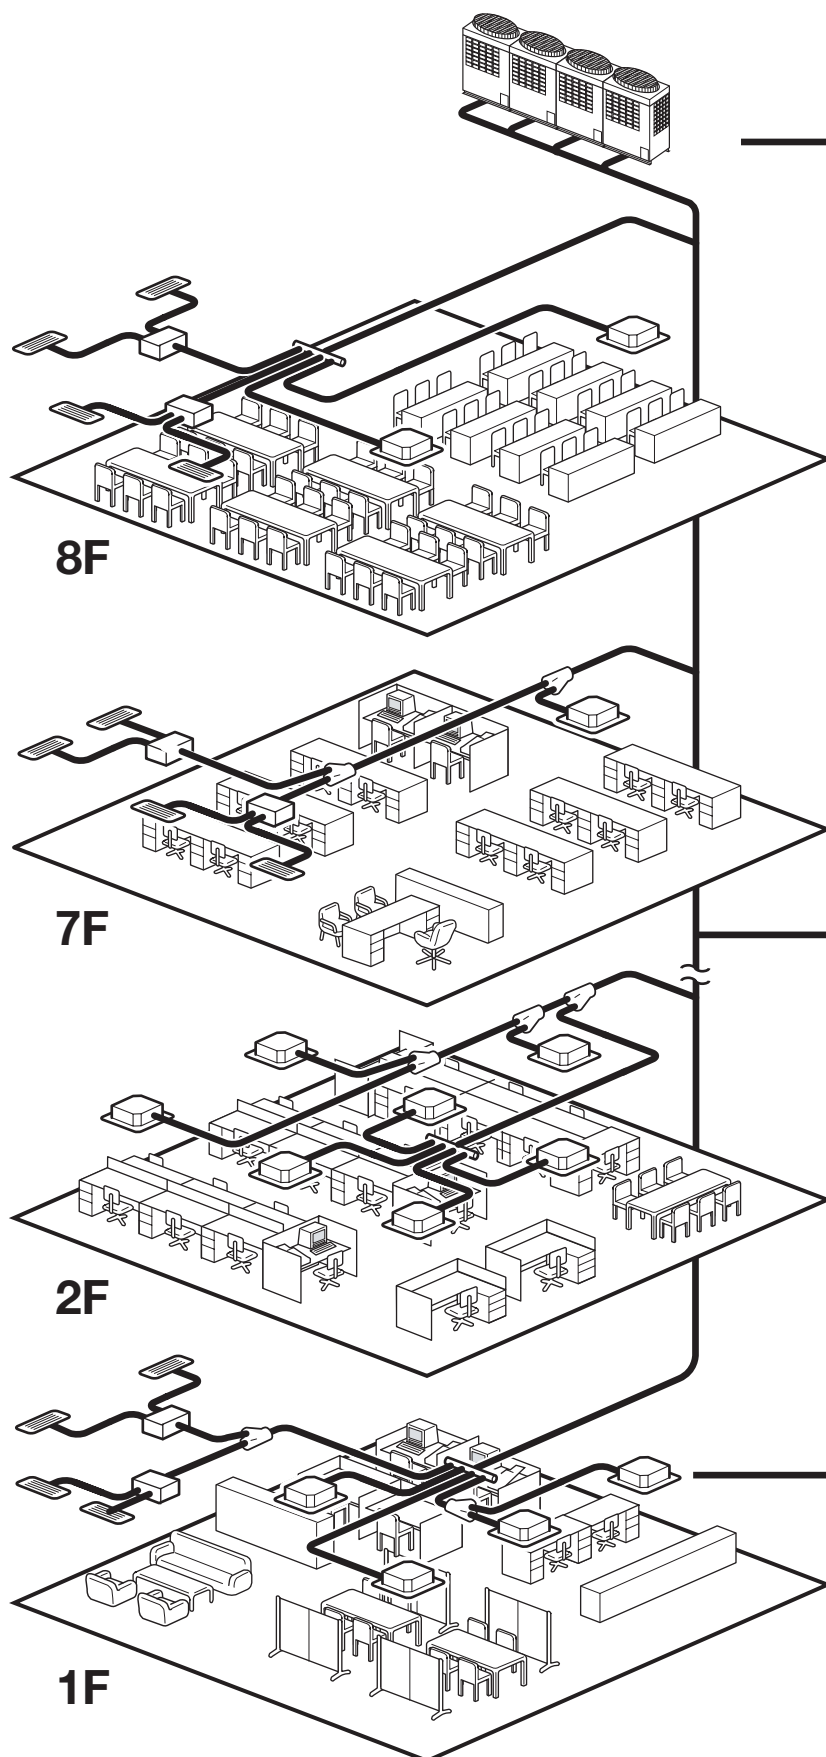



Non-polarized control wiring between the outdoor and indoor units

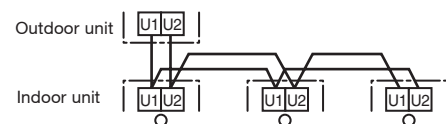

• Wiring diagnosis system

Use the switches on the micro processor P.C.B of the outdoor unit.

Detect wiring to the indoor unit b4 which should not be in system A.
b4 is missing in the system B.

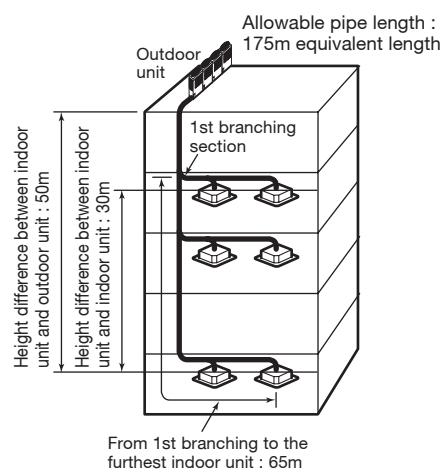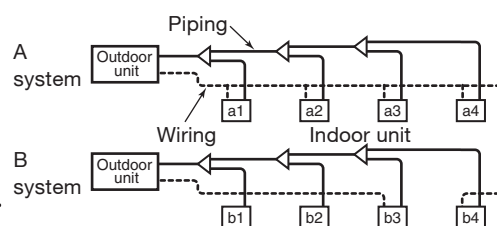

◆ **Compact design**

The design of the modular TOSHIBA Super MMS outdoor unit allows for easy manoeuvring of the unit. The unit will fit into any standard size lift. The compactness of the unit allows for it to be installed into a limited space.

◆ **Largest system capacity**

TOSHIBA Super MMS can be combined up to 48 HP (135kW) as one refrigerant system.

◆ **Energy saving**

No. 1 COP in VRF industry. Compared with a conventional chiller fan coil system a large energy saving can be achieved.

◆ **Advanced bus communication system**

Wiring between indoor and outdoor units is a simple 2 core wire system. Communication of addresses is also automatically configured. A default test mode operation is available.

◆ **Self diagnostics system**

Comprehensive troubleshooting codes allows for a timely identification of possible problems arising.

◆ **High lift design**

Equivalent pipe length of 175m and vertical lift of 50m is possible with TOSHIBA Super MMS. The maximum vertical lift between indoor units is 30m, this being the highest in the industry. This allows for greater flexibility within the building design of the system.

◆ **Multiplied indoor units**

Indoor units with different capacities and configurations can be combined up to a maximum of 135% of the outdoor units capacity. A maximum of 48 indoor units can be combined with the 30 – 48 HP outdoor units.

◆ **Intelligent control**

TOSHIBA Super MMS intelligent controls and modulating valves deliver the required capacity, according to the load variation from 50% to 100%.

The intelligent controls and modulating valves limit or increase the cooling capacity dynamically so humidity and temperature are kept within the comfort zone.

◆ **Conforms to building control law**

IAQ (Indoor Air Quality) is also achieved by combining various accessories required by the Building Control Law.

◆ **Wide control applications**

Artificial Intelligence Network system.
Central control and monitoring system available.
Weekly schedule operation through weekly timer.

Integration with Building Management System (BMS) is available.

2. SUMMARY OF SYSTEM EQUIPMENTS

Equipment

1. Outdoor units

Corresponding HP			Inverter unit					Appearance
			5 HP	6 HP	8 HP	10 HP	12 HP	
Model name	Heat pump	MMY-	MAP0501HT8	MAP0601HT8	MAP0801HT8	MAP1001HT8	MAP1201HT8	
	Heat pump	MMY-	MAP0501HT7	MAP0601HT7	MAP0801HT7	MAP1001HT7	MAP1201HT7	
	Cooling only	MMY-	MAP0501T8	MAP0601T8	MAP0801T8	MAP1001T8	MAP1201T8	
Cooling capacity (kW)			14.0	16.0	22.4	28.0	33.5	
Heating capacity (kW)			16.0	18.0	25.0	31.5	37.5	


2. Outdoor units (Combination of outdoor units)

Corresponding HP		5 HP	6 HP	8 HP	10 HP	12 HP	14 HP	16 HP	18 HP	20 HP	22 HP
Combined Model	MMY-	MAP0501HT8	MAP0601HT8	MAP0801HT8	MAP1001HT8	MAP1201HT8	AP1401HT8	AP1601HT8	AP1801HT8	AP2001HT8	AP2201HT8
	MMY-	MAP0501HT7	MAP0601HT7	MAP0801HT7	MAP1001HT7	MAP1201HT7	AP1401HT7	AP1601HT7	AP1801HT7	AP2001HT7	AP2201HT7
	MMY-	MAP0501T8	MAP0601T8	MAP0801T8	MAP1001T8	MAP1201T8	AP1401T8	AP1601T8	AP1801T8	AP2001T8	AP2201T8
Cooling capacity(kW)		14.0	16.0	22.4	28.0	33.5	38.4	45.0	50.4	56.0	61.5
Heating capacity(kW)		16.0	18.0	25.0	31.5	37.5	43.0	50.0	56.5	63.0	69.0
Combined outdoor units	5 HP	6 HP	8 HP	10 HP	12 HP	8 HP	8 HP	10 HP	10 HP	8 HP	8 HP
	—	—	—	—	—	6 HP	8 HP	8 HP	10 HP	10 HP	8 HP
	—	—	—	—	—	—	—	—	—	—	6 HP
	—	—	—	—	—	—	—	—	—	—	—
No. of connectable indoor units.		8	10	13	16	20	23	27	30	33	37

Corresponding HP		22 HP	24 HP	24 HP	26 HP	28 HP	30 HP	32 HP	32 HP	34 HP	34 HP
Combined Model	MMY-	AP2211HT8	AP2401HT8	AP2411HT8	AP2601HT8	AP2801HT8	AP3001HT8	AP3201HT8	AP3211HT8	AP3401HT8	AP3411HT8
	MMY-	AP2211HT7	AP2401HT7	AP2411HT7	AP2601HT7	AP2801HT7	AP3001HT7	AP3201HT7	AP3211HT7	AP3401HT7	AP3411HT7
	MMY-	AP2211T8	AP2401T8	AP2411T8	AP2601T8	AP2801T8	AP3001T8	AP3201T8	AP3211T8	AP3401T8	AP3411T8
Cooling capacity(kW)		61.5	68.0	68.0	73.0	78.5	84.0	90.0	90.0	96.0	96.0
Heating capacity(kW)		69.0	76.5	76.5	81.5	88.0	95.0	100.0	100.0	108.0	108.0
Combined outdoor units	12 HP	8 HP	12 HP	10 HP	10 HP	10 HP	8 HP	12 HP	10 HP	10 HP	12 HP
	10 HP	8 HP	12 HP	8 HP	10 HP	10 HP	8 HP	10 HP	8 HP	12 HP	12 HP
	—	8 HP	—	8 HP	8 HP	10 HP	8 HP	10 HP	8 HP	10 HP	10 HP
	—	—	—	—	—	—	8 HP	—	8 HP	—	—
No. of connectable indoor units		37	40	40	43	47	48	48	48	48	48

Corresponding HP	36 HP	36 HP	38 HP	40 HP	42 HP	44 HP	46 HP	48 HP
Combined Model	MMY-	AP3601HT8	AP3611HT8	AP3801HT8	AP4001HT8	AP4201HT8	AP4401HT8	AP4601HT8
	MMY-	AP3601HT7	AP3611HT7	AP3801HT7	AP4001HT7	AP4201HT7	AP4401HT7	AP4601HT7
	MMY-	AP3601T8	AP3611T8	AP3801T8	AP4001T8	AP4201T8	AP4401T8	AP4601T8
Cooling capacity(kW)		101.0	101.0	106.5	112.0	118.0	123.5	130.0
Heating capacity(kW)		113.0	113.0	119.5	126.5	132.0	138.0	145.0
Combined outdoor units	10 HP	12 HP	10 HP	10 HP	12 HP	12 HP	12 HP	12 HP
	10 HP	12 HP	10 HP	10 HP	10 HP	12 HP	12 HP	12 HP
	8 HP	12 HP	10 HP	10 HP	10 HP	10 HP	12 HP	12 HP
No. of connectable indoor units		48	48	48	48	48	48	48

3. Branching joints and headers

	Model name	Usage		Appearance
Y-shape branching joint (*3)	RBM-BY53E	Indoor unit capacity code (*1) : Total below 6.4		
	RBM-BY103E	Indoor unit capacity code (*1) : Total 6.4 or more and below 14.2 (*2)		
	RBM-BY203E	Indoor unit capacity code (*1) : Total 14.2 or more and below 25.2 (*2)		
	RBM-BY303E	Indoor unit capacity code (*1) : Total 25.2 or more (*2)		
4-branching header (*4)	RBM-HY1043E	Indoor unit capacity code (*1) : Total below 14.2	Max.4 branches	
	RBM-HY2043E	Indoor unit capacity code (*1) : Total 14.2 or more and below 25.2		
8-branching header (*4) (*5)	RBM-HY1083E	Indoor unit capacity code (*1) : Total below 14.2	Max.8 branches	
	RBM-HY2083E	Indoor unit capacity code (*1) : Total 14.2 or more and below 25.2		
T-shape branching joint (For connection of outdoor units)	RBM-BT13E	1 set of 3 types of T-shape joint pipes as described below: The required quantity is arranged and they are combined at the site.		
		Connection piping	Corresponded dia. (mm)	Qty
		Balance pipe	ø9.5	1
		Piping at liquid side	ø9.5 to ø22.2	1
		Piping at gas side	ø15.9 to ø41.3	1

*1 "Capacity code" can be obtained. (Capacity code is not actual capacity)

*2 If total capacity code value of indoor unit exceeds that of outdoor unit, apply capacity code of outdoor unit.

*3 When using Y-shape branching joint for 1st branching, select according to the capacity code of the outdoor unit.

*4 Max. capacity code of 6.0 in total can be connected.

*5 If capacity code of outdoor unit is 26 or more, it is not used for 1st branching.

*6 Model names for outdoor and indoor units described in this guide are shortened because of the space constraint.

Cooling Only model


50Hz

4

Super Modular Multi System Outdoor Unit : List of Product and Combined Model Name

HP (Capacity code)	Model name MMY-	No. of combined units	Inverter 5 HP MMY-	Used Qty	Inverter 6 HP MMY-	Used Qty	Inverter 8HP MMY-	Used Qty	Inverter 10HP MMY-	Used Qty	Inverter 12HP MMY-	Used Qty
5HP (5)	MAP0501T8	1	MAP0501T8	1								
6HP (6)	MAP0601T8	1			MAP0601T8	1						
8HP (8)	MAP0801T8	1					MAP0801T8	1				
10HP (10)	MAP1001T8	1							MAP1001T8	1		
12HP (12)	MAP1201T8	1									MAP1201T8	1
14HP (14)	AP1401T8	2			MAP0601T8	1	MAP0801T8	1				
16HP (16)	AP1601T8	2					MAP0801T8	2				
18HP (18)	AP1801T8	2					MAP0801T8	1	MAP1001T8	1		
20HP (20)	AP2001T8	2							MAP1001T8	2		
22HP (22)	AP2201T8	3			MAP0601T8	1	MAP0801T8	2				
22HP (22)	AP2211T8	2							MAP1001T8	1	MAP1201T8	1
24HP (24)	AP2401T8	3					MAP0801T8	3				
24HP (24)	AP2411T8	2									MAP1201T8	2
26HP (26)	AP2601T8	3					MAP0801T8	2	MAP1001T8	1		
28HP (28)	AP2801T8	3					MAP0801T8	1	MAP1001T8	2		
30HP (30)	AP3001T8	3							MAP1001T8	3		
32HP (32)	AP3201T8	4					MAP0801T8	4				
32HP (32)	AP3211T8	3							MAP1001T8	2	MAP1201T8	1
34HP (34)	AP3401T8	4					MAP0801T8	3	MAP1001T8	1		
34HP (34)	AP3411T8	3							MAP1001T8	1	MAP1201T8	2
36HP (36)	AP3601T8	4					MAP0801T8	2	MAP1001T8	2		
36HP (36)	AP3611T8	3									MAP1201T8	3
38HP (38)	AP3801T8	4					MAP0801T8	1	MAP1001T8	3		
40HP (40)	AP4001T8	4							MAP1001T8	4		
42HP (42)	AP4201T8	4							MAP1001T8	3	MAP1201T8	1
44HP (44)	AP4401T8	4							MAP1001T8	2	MAP1201T8	2
46HP (46)	AP4601T8	4							MAP1001T8	1	MAP1201T8	3
48HP (48)	AP4801T8	4									MAP1201T8	4

1. Allocation standard of model name

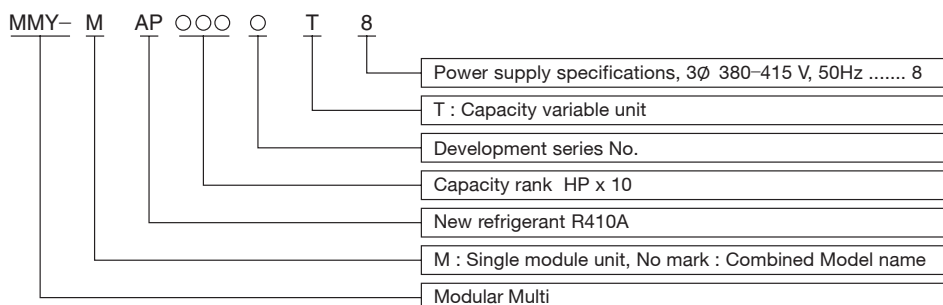

2. Range of combined capacity

No. of combined units: 1 to 4 units

Capacity of combined units: 14 HP (140 type) to 48 HP (480 type)

3. Rated conditions (Rated mode : Condition)


Cooling: Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heat Pump model

50Hz

HP (Capacity code)	Model name MMY-	No. of combined units	Inverter 5 HP MMY-	Used Qty	Inverter 6 HP MMY-	Used Qty	Inverter 8 HP MMY-	Used Qty	Inverter 10 HP MMY-	Used Qty	Inverter 12 HP MMY-	Used Qty
5HP (5)	MAP0501HT8	1	MAP0501HT8	1								
6HP (6)	MAP0601HT8	1			MAP0601HT8	1						
8HP (8)	MAP0801HT8	1					MAP0801HT8	1				
10HP (10)	MAP1001HT8	1							MAP1001HT8	1		
12HP (12)	MAP1201HT8	1									MAP1201HT8	1
14HP (14)	AP1401HT8	2			MAP0601HT8	1	MAP0801HT8	1				
16HP (16)	AP1601HT8	2					MAP0801HT8	2				
18HP (18)	AP1801HT8	2					MAP0801HT8	1	MAP1001HT8	1		
20HP (20)	AP2001HT8	2							MAP1001HT8	2		
22HP (22)	AP2201HT8	3			MAP0601HT8	1	MAP0801HT8	2				
22HP (22)	AP2211HT8	2							MAP1001HT8	1	MAP1201HT8	1
24HP (24)	AP2401HT8	3					MAP0801HT8	3				
24HP (24)	AP2411HT8	2									MAP1201HT8	2
26HP (26)	AP2601HT8	3					MAP0801HT8	2	MAP1001HT8	1		
28HP (28)	AP2801HT8	3					MAP0801HT8	1	MAP1001HT8	2		
30HP (30)	AP3001HT8	3							MAP1001HT8	3		
32HP (32)	AP3201HT8	4					MAP0801HT8	4				
32HP (32)	AP3211HT8	3							MAP1001HT8	2	MAP1201HT8	1
34HP (34)	AP3401HT8	4					MAP0801HT8	3	MAP1001HT8	1		
34HP (34)	AP3411HT8	3							MAP1001HT8	1	MAP1201HT8	2
36HP (36)	AP3601HT8	4					MAP0801HT8	2	MAP1001HT8	2		
36HP (36)	AP3611HT8	3									MAP1201HT8	3
38HP (38)	AP3801HT8	4					MAP0801HT8	1	MAP1001HT8	3		
40HP (40)	AP4001HT8	4							MAP1001HT8	4		
42HP (42)	AP4201HT8	4							MAP1001HT8	3	MAP1201HT8	1
44HP (44)	AP4401HT8	4							MAP1001HT8	2	MAP1201HT8	2
46HP (46)	AP4601HT8	4							MAP1001HT8	1	MAP1201HT8	3
48HP (48)	AP4801HT8	4									MAP1201HT8	4

1. Allocation standard of model name

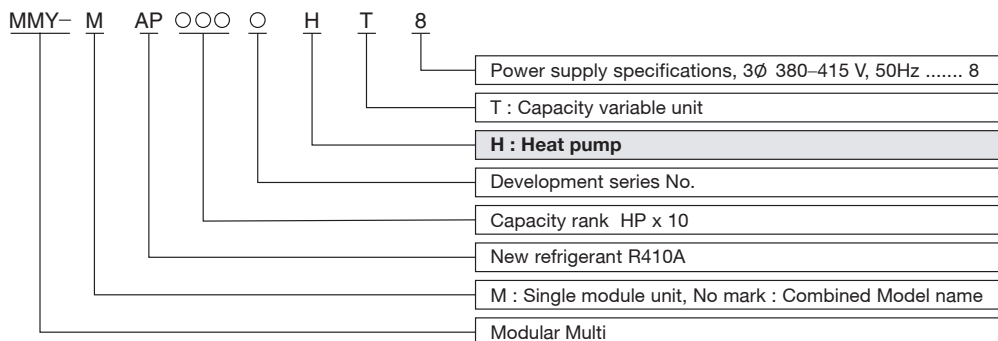

2. Range of combined capacity

No. of combined units: 1 to 4 units

Capacity of combined units: 14 HP (140 type) to 48 HP (480 type)

3. Rated conditions (Rated mode : Condition)


Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

Super Modular Multi System Outdoor Unit : List of Product and Combined Model Name

HP (Capacity code)	Model name MMY-	No. of combined units	Inverter 5 HP MMY-	Used Qty	Inverter 6 HP MMY-	Used Qty	Inverter 8 HP MMY-	Used Qty	Inverter 10 HP MMY-	Used Qty	Inverter 12 HP MMY-	Used Qty
5HP (5)	MAP0501HT7	1	MAP0501HT7	1								
6HP (6)	MAP0601HT7	1			MAP0601HT7	1						
8HP (8)	MAP0801HT7	1					MAP0801HT7	1				
10HP (10)	MAP1001HT7	1							MAP1001HT7	1		
12HP (12)	MAP1201HT7	1									MAP1201HT7	1
14HP (14)	AP1401HT7	2			MAP0601HT7	1	MAP0801HT7	1				
16HP (16)	AP1601HT7	2					MAP0801HT7	2				
18HP (18)	AP1801HT7	2					MAP0801HT7	1	MAP1001HT7	1		
20HP (20)	AP2001HT7	2							MAP1001HT7	2		
22HP (22)	AP2201HT7	3			MAP0601HT7	1	MAP0801HT7	2				
22HP (22)	AP2211HT7	2							MAP1001HT7	1	MAP1201HT7	1
24HP (24)	AP2401HT7	3					MAP0801HT7	3				
24HP (24)	AP2411HT7	2									MAP1201HT7	2
26HP (26)	AP2601HT7	3					MAP0801HT7	2	MAP1001HT7	1		
28HP (28)	AP2801HT7	3					MAP0801HT7	1	MAP1001HT7	2		
30HP (30)	AP3001HT7	3							MAP1001HT7	3		
32HP (32)	AP3201HT7	4					MAP0801HT7	4				
32HP (32)	AP3211HT7	3							MAP1001HT7	2	MAP1201HT7	1
34HP (34)	AP3401HT7	4					MAP0801HT7	3	MAP1001HT7	1		
34HP (34)	AP3411HT7	3							MAP1001HT7	1	MAP1201HT7	2
36HP (36)	AP3601HT7	4					MAP0801HT7	2	MAP1001HT7	2		
36HP (36)	AP3611HT7	3									MAP1201HT7	3
38HP (38)	AP3801HT7	4					MAP0801HT7	1	MAP1001HT7	3		
40HP (40)	AP4001HT7	4							MAP1001HT7	4		
42HP (42)	AP4201HT7	4							MAP1001HT7	3	MAP1201HT7	1
44HP (44)	AP4401HT7	4							MAP1001HT7	2	MAP1201HT7	2
46HP (46)	AP4601HT7	4							MAP1001HT7	1	MAP1201HT7	3
48HP (48)	AP4801HT7	4									MAP1201HT7	4

1. Allocation standard of model name

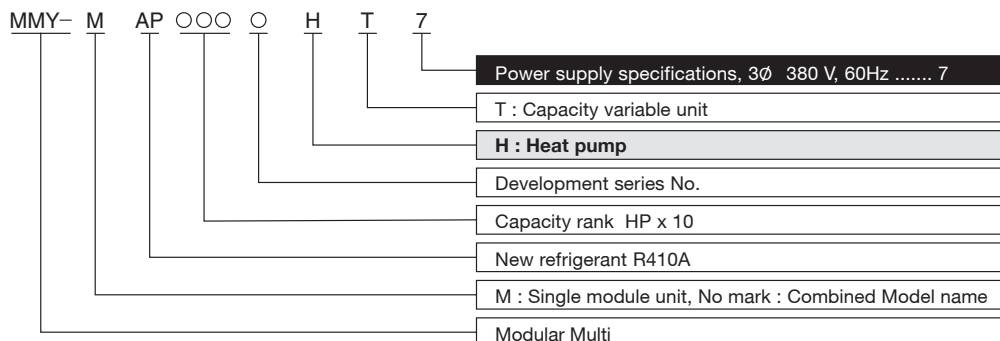

2. Range of combined capacity

No. of combined units: 1 to 4 units

Capacity of combined units: 14 HP (140 type) to 48 HP (480 type)

3. Rated conditions (Rated mode : Condition)

Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB


4. Indoor unit

*1) China market only *2) European market only *3) Korea market only







Type	Appearance	Model name	Capacity rank	Capacity code	Cooling capacity (kW)	Heating capacity (kW)
4-way Air Discharge Cassette Type		MMU-AP0091H	009 type	1.00	2.8	3.2
		MMU-AP0121H	012 type	1.25	3.6	4.0
		MMU-AP0151H	015 type	1.70	4.5	5.0
		MMU-AP0181H	018 type	2.00	5.6	6.3
		MMU-AP0241H	024 type	2.50	7.1	8.0
		MMU-AP0271H	027 type	3.00	8.0	9.0
		MMU-AP0301H	030 type	3.20	9.0	10.0
		MMU-AP0361H	036 type	4.00	11.2	12.5
		MMU-AP0481H	048 type	5.00	14.0	16.0
2-way Air Discharge Cassette Type		MMU-AP0561H	056 type	6.00	16.0	18.0
		MMU-AP0071WH	007 type	0.8	2.2	2.5
		MMU-AP0091WH	009 type	1.00	2.8	3.2
		MMU-AP0121WH	012 type	1.25	3.6	4.0
		MMU-AP0151WH	015 type	1.70	4.5	5.0
		MMU-AP0181WH	018 type	2.00	5.6	6.3
		MMU-AP0241WH	024 type	2.50	7.1	8.0
		MMU-AP0271WH	027 type	3.00	8.0	9.0
		MMU-AP0301WH	030 type	3.20	9.0	10.0
1-way Air Discharge Cassette Type		MMU-AP0481WH*1)	048 type	5.00	14.0	16.0
		MMU-AP0071YH	007 type	0.80	2.2	2.5
		MMU-AP0091YH	009 type	1.00	2.8	3.2
		MMU-AP0121YH	012 type	1.25	3.6	4.0
		MMU-AP0151SH	015 type	1.70	4.5	5.0
		MMU-AP0181SH	018 type	2.00	5.6	6.3
		MMU-AP0241SH	024 type	2.50	7.1	8.0
		MMU-AP0152SH	015 type	1.70	4.5	5.0
		MMU-AP0182SH	018 type	2.00	5.6	6.3
Slim Duct Type		MMU-AP0242SH	024 type	2.50	7.1	8.0
		MMD-AP0071SPH	007 type	0.80	2.2	2.5
		MMD-AP0091SPH	009 type	1.00	2.8	3.2
		MMD-AP0121SPH	012 type	1.25	3.6	4.0
		MMD-AP0151SPH	015 type	1.70	4.5	5.0
		MMD-AP0181SPH	018 type	2.00	5.6	6.3
		MMD-AP0071SPH(SH)-C*1)	007 type	0.80	2.2	2.5
		MMD-AP0091SPH(SH)-C*1)	009 type	1.00	2.8	3.2
		MMD-AP0121SPH(SH)-C*1)	012 type	1.25	3.6	4.0
		MMD-AP0151SPH(SH)-C*1)	015 type	1.70	4.5	5.0
		MMD-AP0181SPH(SH)-C*1)	018 type	2.00	5.6	6.3
		MMD-AP0071SPH-K*3)	007 type	0.80	2.2	2.5
		MMD-AP0091SPH-K*3)	009 type	1.00	2.8	3.2
		MMD-AP0121SPH-K*3)	012 type	1.25	3.6	4.0
Concealed Duct Standard Type		MMD-AP0151SPH-K*3)	015 type	1.70	4.5	5.0
		MMD-AP0181SPH-K*3)	018 type	2.00	5.6	6.3
		MMD-AP0071BH	007 type	0.80	2.2	2.5
		MMD-AP0091BH	009 type	1.00	2.8	3.2
		MMD-AP0121BH	012 type	1.25	3.6	4.0
		MMD-AP0151BH	015 type	1.70	4.5	5.0
		MMD-AP0181BH	018 type	2.00	5.6	6.3
		MMD-AP0241BH	024 type	2.50	7.1	8.0
		MMD-AP0271BH	027 type	3.00	8.0	9.0
		MMD-AP0301BH	030 type	3.20	9.0	10.0
Concealed Duct High Static Pressure Type		MMD-AP0361BH	036 type	4.00	11.2	12.5
		MMD-AP0481BH	048 type	5.00	14.0	16.0
		MMD-AP0561BH	056 type	6.00	16.0	18.0
		MMD-AP0181H	018 type	2.00	5.6	6.3
		MMD-AP0241H	024 type	2.50	7.1	8.0
		MMD-AP0271H	027 type	3.00	8.0	9.0
		MMD-AP0361H	036 type	4.00	11.2	10.0
Under Ceiling Type		MMD-AP0481H	048 type	5.00	14.0	16.0
		MMD-AP0721H	072 type	8.00	22.4	25.0
		MMD-AP0961H	096 type	10.00	28.0	31.5
		MMC-AP0151H	015 type	1.70	4.5	5.0
		MMC-AP0181H	018 type	2.00	5.6	6.3
		MMC-AP0241H	024 type	2.50	7.1	8.0
		MMC-AP0271H	027 type	3.00	8.0	9.0
		MMC-AP0361H	036 type	4.00	11.2	12.5
		MMC-AP0481H	048 type	5.00	14.0	16.0






4. Indoor unit


*1) China market only *2) European market only *3) Korea market only

Type	Appearance	Model name	Capacity rank	Capacity code	Cooling capacity (kW)	Heating capacity (kW)
High Wall Type (1 series)		MMK-AP0071H	007 type	0.80	2.2	2.5
		MMK-AP0091H	009 type	1.00	2.8	3.2
		MMK-AP0121H	012 type	1.25	3.6	4.0
		MMK-AP0151H	015 type	1.70	4.5	5.0
		MMK-AP0181H	018 type	2.00	5.6	6.3
High Wall Type (2 series)		MMK-AP0241H	024 type	2.50	7.1	8.0
		MMK-AP0072H*2)	007 type	0.80	2.2	2.5
		MMK-AP0092H*2)	009 type	1.00	2.8	3.2
		MMK-AP0122H*2)	012 type	1.25	3.6	4.0
		MMK-AP0152H*2)	015 type	1.70	4.5	5.0
Floor Standing Cabinet Type		MMK-AP0181H	018 type	2.00	5.6	6.3
		MMK-AP0241H	024 type	2.50	7.1	8.0
		MMK-AP0071H	007 type	0.80	2.2	2.5
		MMK-AP0091H	009 type	1.00	2.8	3.2
		MMK-AP0121H	012 type	1.25	3.6	4.0
Floor Standind Concealed Type		MMK-AP0151H	015 type	1.70	4.5	5.0
		MMK-AP0181H	018 type	2.00	5.6	6.3
		MMK-AP0241H	024 type	2.50	7.1	8.0
		MMK-AP0071H	007 type	0.80	2.2	2.5
		MMK-AP0091H	009 type	1.00	2.8	3.2
Floor Standind Type		MMK-AP0121H	012 type	1.25	3.6	4.0
		MMK-AP0151H	015 type	1.70	4.5	5.0
		MMK-AP0181H	018 type	2.00	5.6	6.3
		MMK-AP0241H	024 type	2.50	7.1	8.0
		MMK-AP0071H	007 type	0.80	2.2	2.5
		MMK-AP0091H	009 type	1.00	2.8	3.2

5. Remote controller

Name	Model name	Appearance	Application	Function
Wired remote controller	RBC-AMT21E/RBC-AMT31E		Connected to indoor unit  Wired remote controller (In case of control by 2 remote controllers)	- Start / Stop - Mode Change - Temperature setting - Change of air flow - Timer function ① On or off timer operation, setting in 30 minute increments. Automatic Off function. ② Combined with the weekly timer, weekly schedule operation can be operated. - Filter sign Displays automatically maintenance time of indoor filter. Filter sign flashes. - Self-diagnosis function Pressing "CHECK" button displays cause of fault on the check code. - Control by 2 remote controllers is available. Two remote controllers can be connected to one indoor unit. The indoor unit can be separately operated from a different location.
	RBC-AS21E/RBC-AS21E2		Connected to indoor unit  Simple remote controller	- Start / Stop - Temperature setting - Change of air flow - Check code display
Wireless remote controller kit	TCB-AX21U(W)-E TCB-AX21U(W)-E2		Connected to indoor unit 	- Start / Stop - Mode change - Temperature setting - Change of air flow - Timer function On or off timer operation, setting in 30 minute increments. Automatic Off function. - Control by 2 remote controllers is available. Two wireless remote controllers can operate one indoor unit. The indoor unit can be separately operated from a different location. - Check code display TCB-AX21U(W)-E (for 4-way airdischARGE cassette) RBC-AX22CE (for under ceiling) TCB-AX21-E (for other units except for the concealed duct high static pressure)
	RBC-AX22CE RBC-AX22CE2			

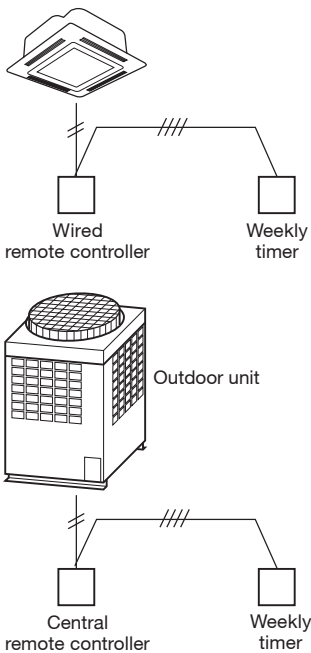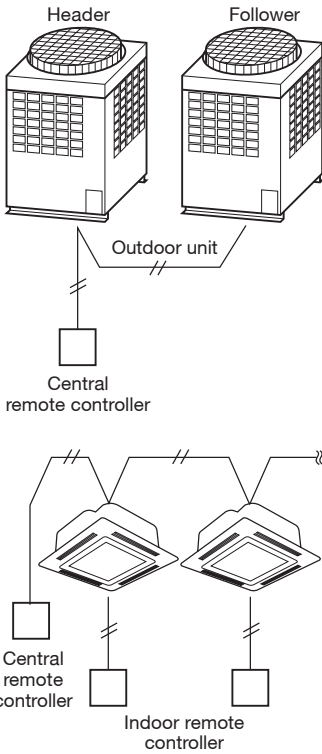Name	Model name	Appearance	Application	Performance
Weekly timer	RBC-EXW21E RBC-EXW21E2		Connected to central remote controller or wired remote controller 	- Weekly schedule operation - Setting different start / stop time for each day of the week - ON / OFF can be set 3 times a day.  “CHECK” “PROGRAM” “DAY” button copying of setting easy. - Two different schedules for a week can be specified. (Summer schedule and winter schedule, etc.) “CANCEL” “DAY” button enables holiday setting. - If power supply fails, the setting contents are stored in the memory for 100 hours.
Central remote controller	TCB-SC642TLE TCB-SC642TLE2		Connected to outdoor unit, indoor unit 	- Individual control up to 64 indoor units. - Individual control for max. 64 indoor units divided into 4 zones. (Up to 16 indoor units) for each zone - Up to 16 outdoor header units are connectable. 4 type central control setting to inhibit individual operation by remote controller can be selected. - Setting for one of 1 to 4 zones is available. - Can be used with other central control devices (Up to 10 central control devices with in one control circuit) - Two selectable control modes (Central controller mode, Remote controller mode) - Setting of simultaneous ON/OFF 3 times for each day of the week combined with a weekly timer.

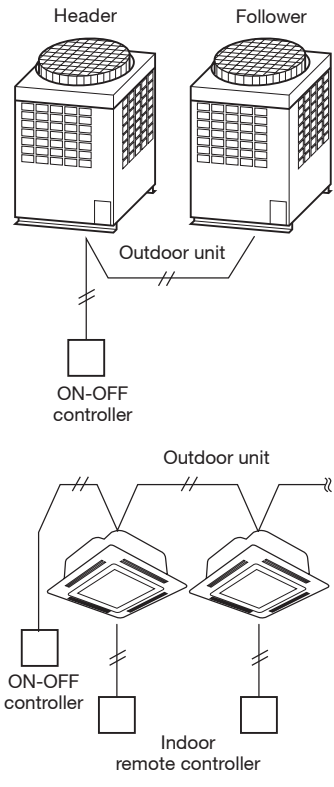Name	Model name	Appearance	Application	Performance
ON-OFF controller	TCB-CC163TLE TCB-CC163TLE2		Connected to outdoor unit, indoor unit  The diagram illustrates two connection scenarios for the ON-OFF controller. In the first scenario, a 'Header' outdoor unit and a 'Follower' outdoor unit are connected to a single 'ON-OFF controller'. In the second scenario, two 'Outdoor unit' components are connected to a single 'ON-OFF controller', which then connects to two 'Indoor remote controller' units.	• Individual control up to 16 indoor units. • Setting of simultaneous ON/OFF 3 times for each day of the week when combined with a weekly timer. • Connected to 2 remote controllers is possible.




Capacity compensation chart

3. Cooling/heating capacity characteristics


1. Cooling capacity calculation method :

Required cooling capacity = Cooling capacity x Factor (①, ②, ③, ④, ⑤*¹) kW


① Indoor air wet bulb temperature vs. capacity correction value

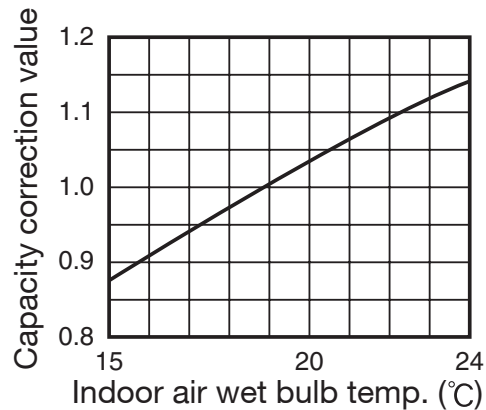

② Outdoor air dry bulb temperature vs. capacity correction value

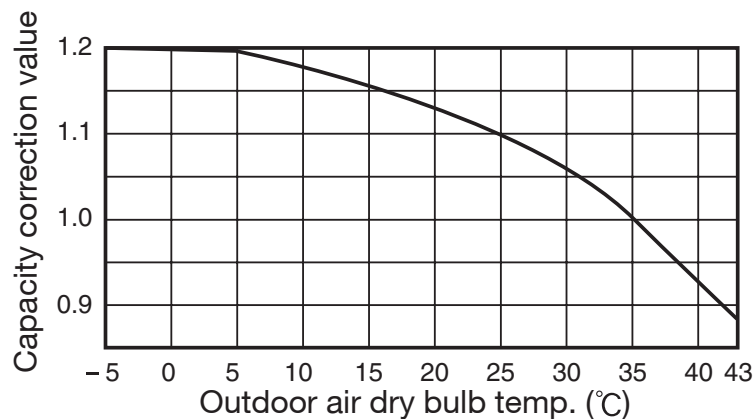


③ Air flow variation ratio of indoor unit vs. capacity correction (For concealed duct type only)

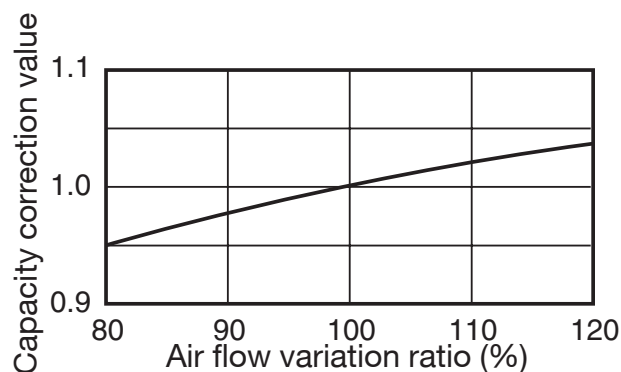


*1 : Coefficient to use for the correction of the outdoor unit capacity when the total capacity of the indoor units are not equal to the outdoor unit capacity.

Connecting pipe length and lift difference between indoor and outdoor units vs. capacity correction value

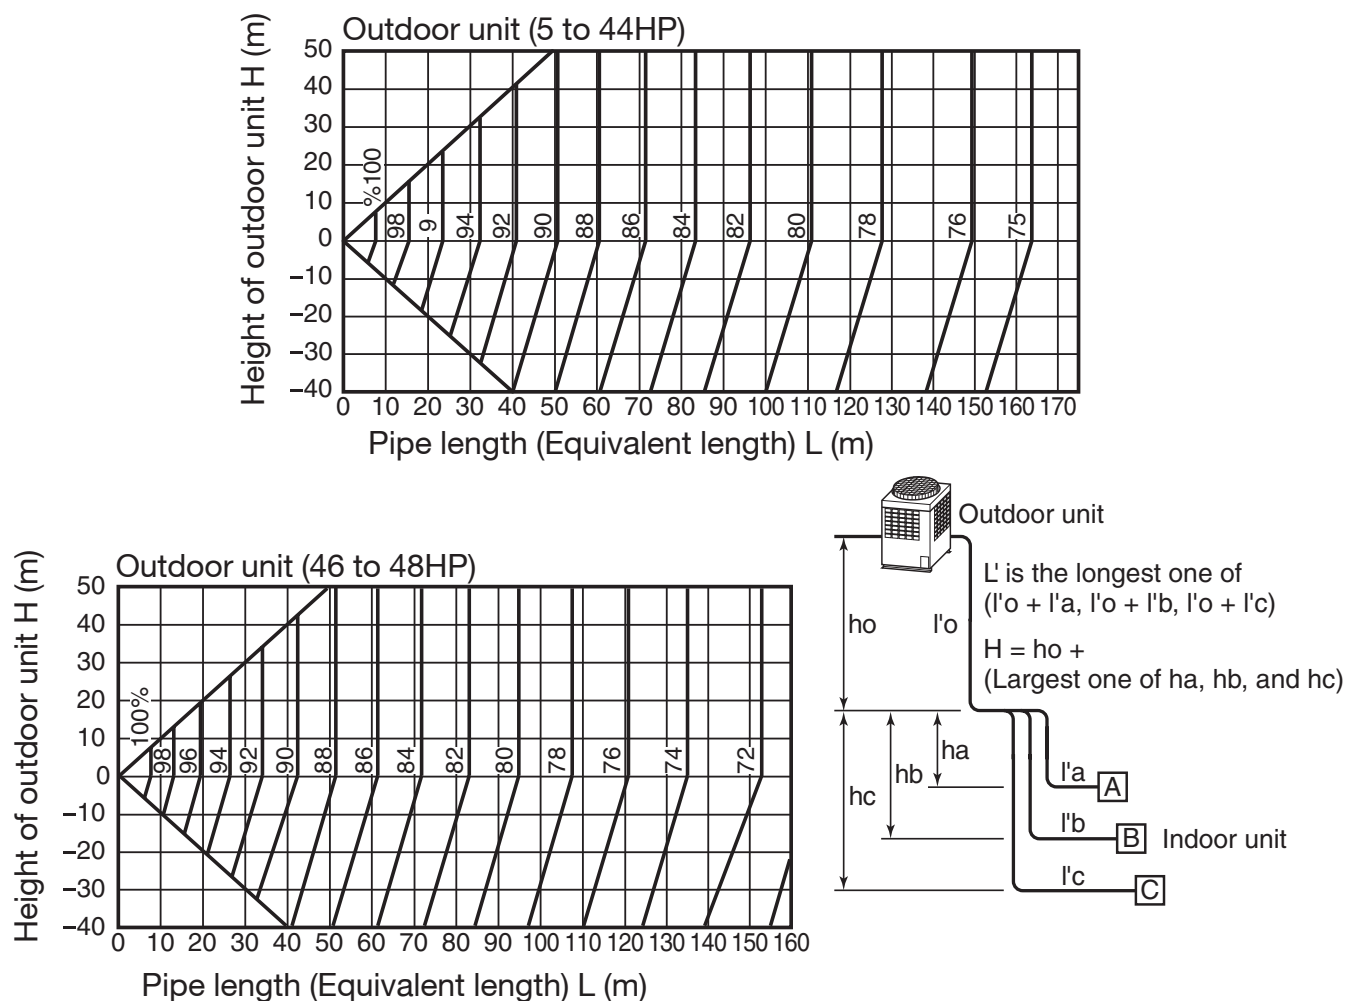

Correction of outdoor unit diversity

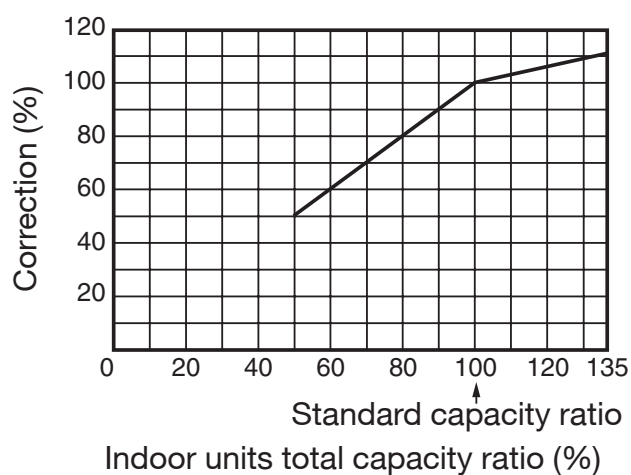


*1 : Coefficient to use for the correction of the outdoor unit capacity when the total capacity of the indoor units are not equal to the outdoor unit capacity.


2. Heating capacity calculation method:

Required heating capacity = Heating capacity x Factor (①,②,③,④,⑤*1,⑥*2)kW


① Indoor air dry bulb temperature vs. capacity correction value

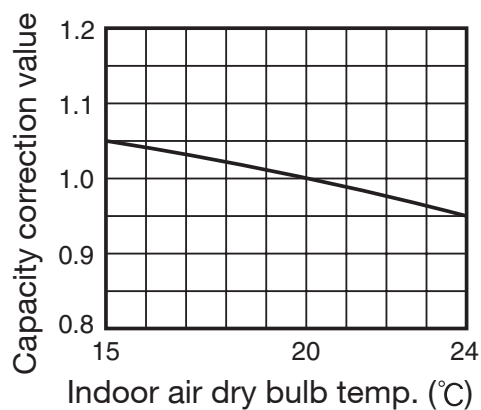

② Outdoor air wet bulb temperature vs. capacity correction value

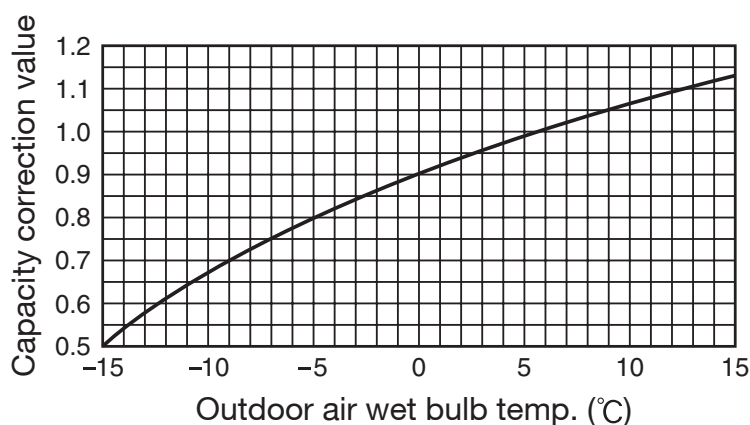



③ Air flow variation ratio of indoor unit vs. capacity correction (For concealed duct type only)

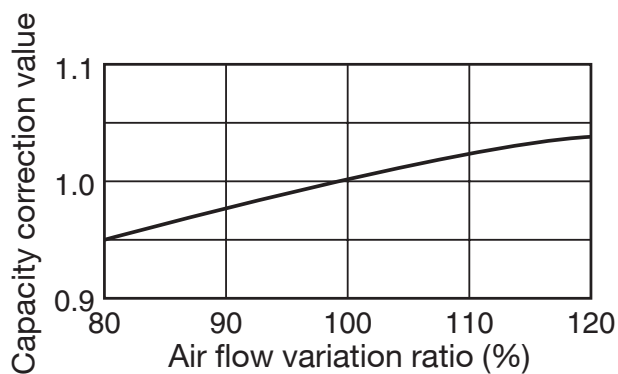


*1 : Coefficient to use for the correction of the outdoor unit capacity when the total capacity of the indoor units are not equal to the outdoor unit capacity.

*2 : Refer to item 3

④ Connecting pipe length and lift difference between indoor and outdoor units vs. capacity correction value

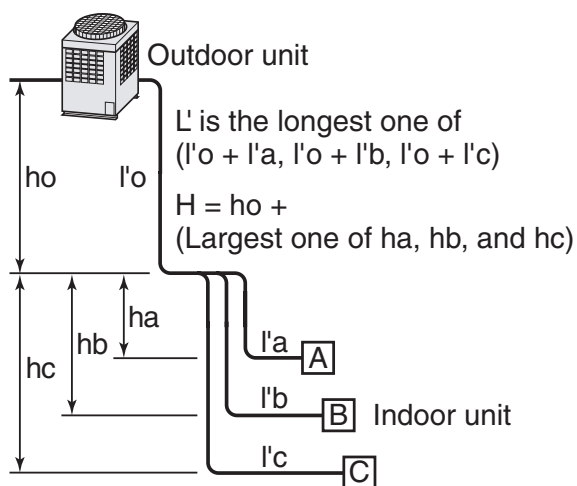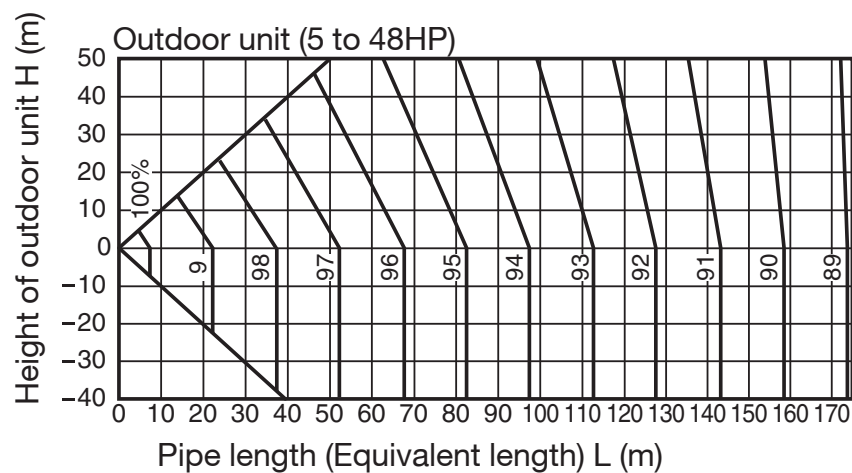

⑤ Correction of outdoor unit diversity

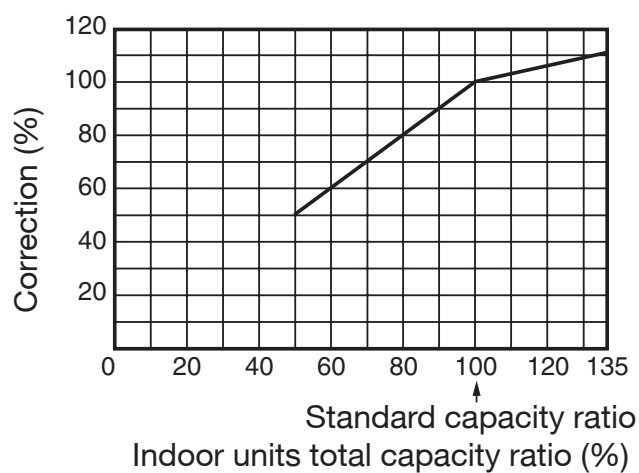


*1 : Coefficient to use for the correction of the outdoor unit capacity when the total capacity of the indoor units are not equal to the outdoor unit capacity.

3. Capacity correction in case of frost on the outdoor heat exchanger when in heating

Correct the heating capacity when frost can be found on the outdoor heat exchanger.

Heating capacity = Capacity after correction of outdoor unit × Correction value of capacity resulted from frost
(Capacity after correction of outdoor unit : Heating capacity calculated in the above item 2.)

⑥ Capacity correction in case of frost on the outdoor heat exchanger


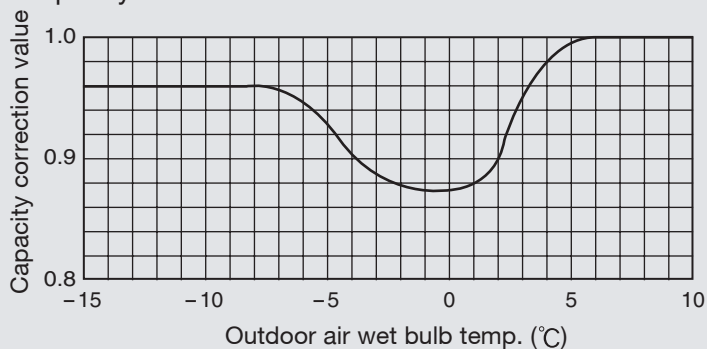


4. Capacity calculation for each indoor unit

Capacity for each indoor unit

$$= \text{Capacity after correction of outdoor unit} \times \frac{\text{Required standard capacity of indoor unit}}{\text{Total value of standard indoor unit capacity}}$$

5. Operating temperature range

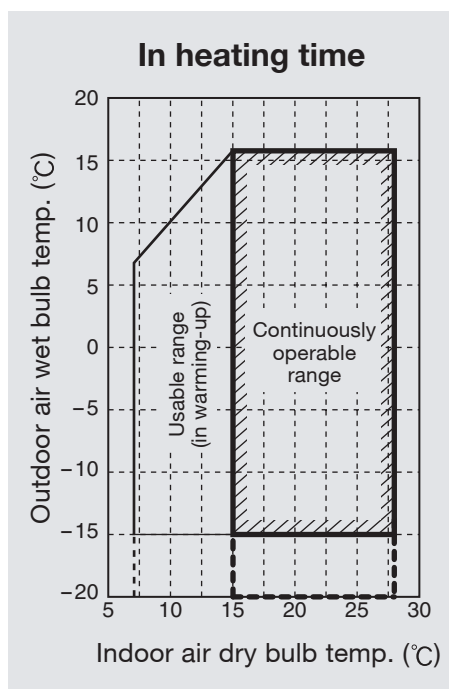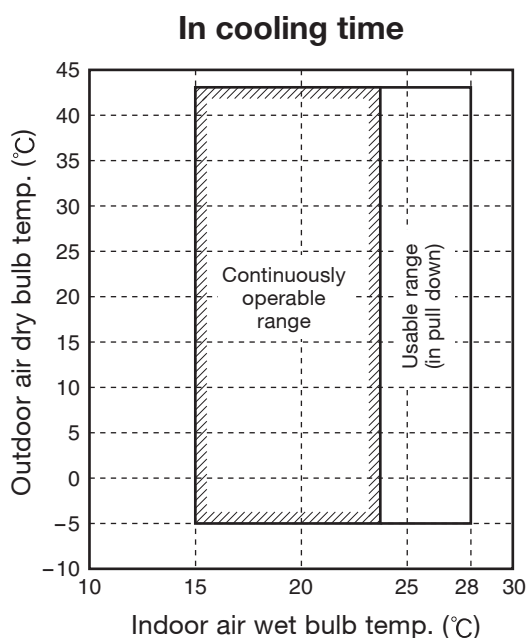

- * The unit can be operated even if outdoor temperature gets down to -20°C . However, note that the warranty covers only up to -15°C because operation beyond that temperature is out of specification.
- * When outdoor air temperature falls below -15°C , it may cause shortening of the products lifetime.

6. Rated conditions


Cooling : Indoor air temperature 27°C DB/ 19.0°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/ 6°C WB



Piping requirements

1. Allowable length/height difference of refrigerant piping

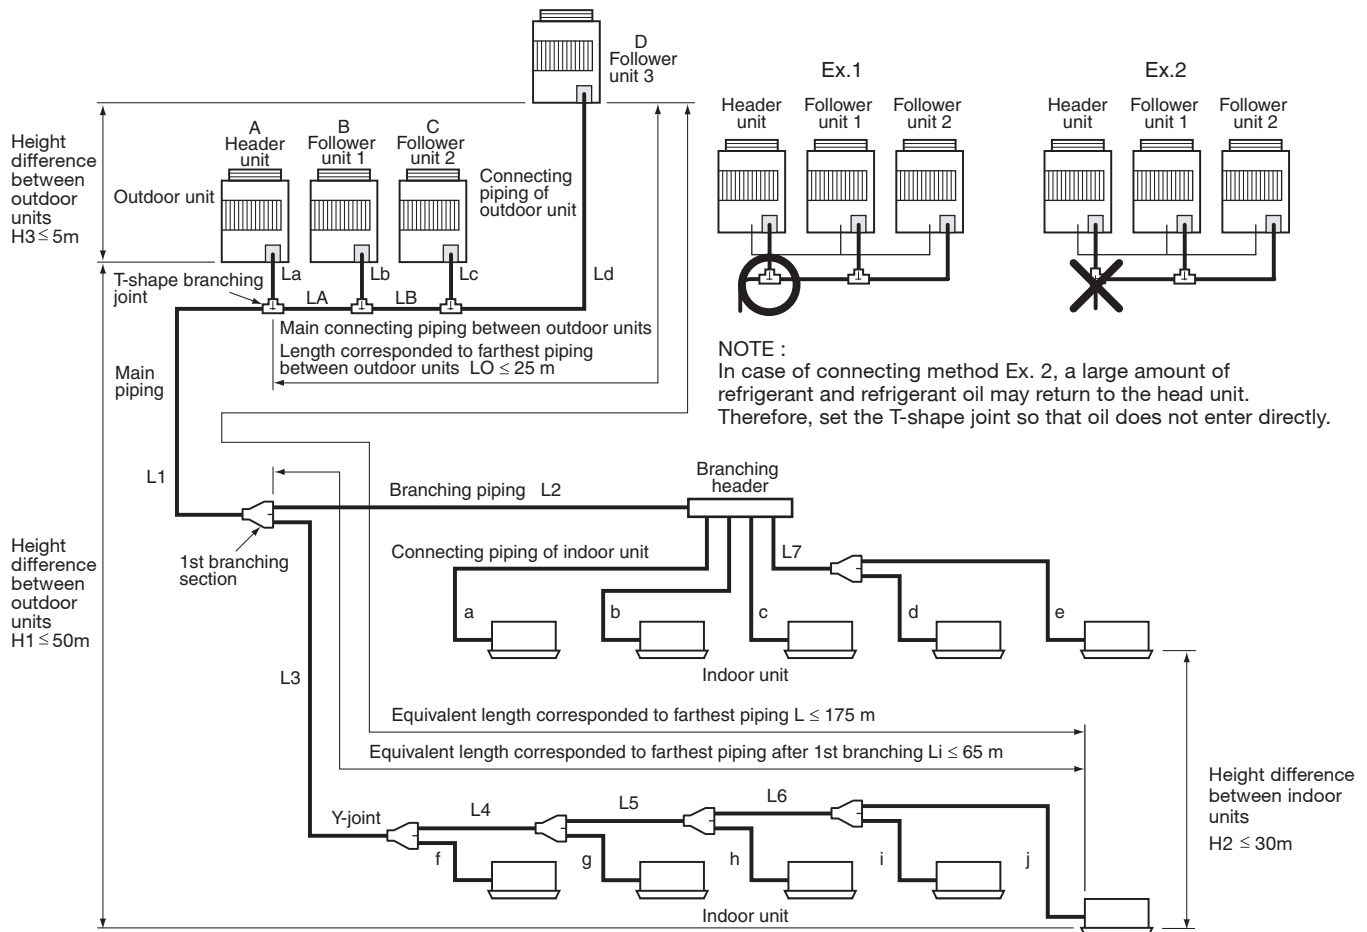

System restrictions

Max. No. of combined outdoor units	4 units
Max. capacity of combined outdoor units	48 HP
Max. No. of connected indoor units	48 units
Max. capacity of combined indoor units	$H2 \leq 15$ 135% $H2 > 15$ 105%

Note 1) Combination of outdoor units : Header unit (1 unit) + Follower units (0 to 3 units). Header unit is the outdoor unit nearest to the connected indoor units.

Note 2) Install the outdoor units in order of capacity.
 (Header unit $\geq$ Follower unit 1 $\geq$ Follower unit 2 $\geq$ Follower unit 3)

Note 3) Refer to outdoor unit combination table.

Note 4) Piping to indoor units shall be perpendicular to piping to the header outdoor unit as <Ex.1>. Do not connect piping to indoor units in the same direction of Header outdoor unit as <Ex.2>.

Allowable length and height difference of refrigerant piping


			Allowable value	Piping section
Piping length	Total extension of pipe (Liquid pipe, real length)		300 m	$LA + LB + La + Lb + Lc + Ld + L1 + L2 + L3 + L4 + L5 + L6 + L7 + a + b + c + d + e + f + g + h + i + j$
	Farthest piping length L (*)	Real length	150 m	$LA + LB + Ld + L1 + L3 + L4 + L5 + L6 + j$
		Equivalent length	175 m	
	Equivalent length of farthest piping from 1st branching L_i (*)		65 m	$L3 + L4 + L5 + L6 + j$
	Equivalent length of farthest piping between outdoor units L_O (*)		25 m	$LA + LB + Ld, (LA + Lb, LA + LB + Lc)$
	Max. equivalent length of main piping (***)		85 m	$L1$
	Max. equivalent length of outdoor unit connecting piping		10 m	$Ld, (La, Lb, Lc)$
Height difference	Max. real length of indoor unit connecting piping		30 m	$a, b, c, d, e, f, g, h, i, j$
	Height between indoor and outdoor units $H1$	Upper outdoor unit	50 m	—
		Lower outdoor unit	40 m (**)	—
	Height between indoor units $H2$		30 m	—
Height difference	Height between outdoor units $H3$		5 m	—

* (D) is outdoor unit furthest from the 1st branch and (j) is the indoor unit furthest from the 1st branch.

** If the height difference ($H2$) between indoor units exceeds 3m, set below 30m.

*** If the maximum combined outdoor unit capacity is 46 HP or more, then the maximum equivalent length is restricted to 70m.

2. Selection of refrigerant piping

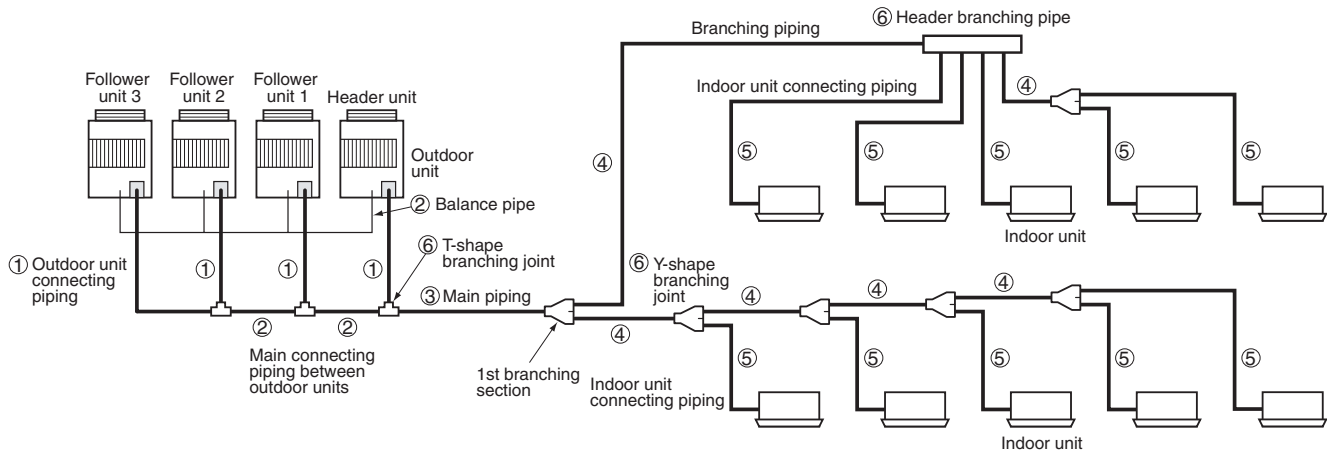

① Pipe size of outdoor unit (Table 1)

Model name			MMY-	Gas side	Liquid side
MAP0501T8	MAP0501HT8	MAP0501HT7	Ø 15.9	Ø9.5	
MAP0601T8	MAP0601HT8	MAP0601HT7	Ø 19.1	Ø9.5	
MAP0801T8	MAP0801HT8	MAP0801HT7	Ø22.2	Ø12.7	
MAP1001T8	MAP1001HT8	MAP1001HT7	Ø22.2	Ø12.7	
MAP1201T8	MAP1201HT8	MAP1201HT7	Ø28.6	Ø12.7	

② Connecting pipe size between outdoor units (Table 2)

Total capacity code of outdoor units at downstream side	Gas side	Liquid side	Balance pipe
14 to below 22	Ø28.6	Ø15.9	Ø9.5
22 to below 26	Ø34.9	Ø15.9	
26 to below 36	Ø34.9	Ø19.1	
36 or more	Ø41.3	Ø22.2	

③ Size of main pipe (Table 3)

Total capacity code of all outdoor units *1	Gas side	Liquid side
Below 6	Ø15.9	Ø9.5
6 to below 8	Ø19.1	Ø9.5
8 to below 12	Ø22.2	Ø12.7
12 to below 14	Ø28.6	Ø12.7
14 to below 22	Ø28.6	Ø15.9
22 to below 26	Ø34.9	Ø15.9
26 to below 36	Ø34.9	Ø19.1
36 to below 46	Ø41.3	Ø22.2
46 or more	Ø41.3 *5	Ø22.2

Determine thickness of the main pipe according to capacity of the outdoor units.

④ Pipe size between branching sections (Table 4)

Total capacity code of indoor units at downstream side *1	Gas side	Liquid side
2.8 or less	Ø12.7	Ø9.5
2.8 to below 6.4	Ø15.9	Ø9.5
6.4 to below 12.2	Ø22.2	Ø12.7
12.2 to below 20.2	Ø28.6	Ø15.9
20.2 to below 25.2	Ø34.9	Ø15.9
25.2 to below 35.2	Ø34.9	Ø19.1
35.2 or more	Ø41.3	Ø22.2

If the total capacity code value of indoor units exceeds that of the outdoor units, apply the capacity code of outdoor units.

⑤ Piping of indoor unit (Table 5)

Capacity rank		Gas side	Liquid side
007 type to 012 type	Real length 15m or less	Ø 9.5	Ø 6.4
	Real length exceeds 15m	Ø12.7	Ø 6.4
015 type to 018 type		Ø12.7	Ø 6.4
024 type to 056 type		Ø15.9	Ø 9.5
072 type to 096 type		Ø22.2	Ø12.7

⑥ Selection of branching section (Table 6)

	Total capacity code of indoor unit *1		Model name
Y-shape branching joint *2	Below 6.4		RBM-BY53E
	6.4 to below 14.2		RBM-BY103E
	14.2 to below 25.2		RBM-BY203E
	25.2 or more		RBM-BY303E
★ Branching 3 header *6	For 4 branching	Below 14.2	RBM-HY1043E
		14.2 to below 25.2	RBM-HY2043E
	For 8 branching	Below 14.2	RBM-HY1083E
		14.2 to below 25.2	RBM-HY2083E
T-shape branching joint (For connecting outdoor unit)	1 set of 3 types of T-shape joint pipes as described below: The required quantity is arranged and combined at the site. • Balance pipe (Corresponded difference Ø9.52) 1 • Piping at liquid side (Corresponded difference Ø9.5 to Ø22.1) 1 • Piping at gas side (Corresponded difference Ø15.9 to Ø41.3) 1		RBM-BT13E

⑦ Minimum wall thickness for R410A application (Table 7)

Soft	Half hard or hard	OD (Inch)	OD (mm)	Minimum wall thickness (mm)
OK	OK	1/4"	6.35	0.80
OK	OK	3/8"	9.52	0.80
OK	OK	1/2"	12.70	0.80
OK	OK	5/8"	15.88	1.00
NG*4	OK	3/4"	19.05	1.00
NG*4	OK	7/8"	22.20	1.00
NG*4	OK	1.1/8"	28.58	1.00
NG*4	OK	1.3/8"	34.92	1.10
NG*4	OK	1.5/8"	41.28	1.25

*1 Code is determined according to the capacity rank.

*2 When using a Y-shape branching joint for the 1st branch, select according to capacity code of the outdoor unit.

*3 For 1 line after branching header indoor units with a maximum capacity code of 6.0 in total can be connected.

*4 If the pipe size is Ø19.0 or more, use a suitable material as detailed in the installation manual.

*5 The maximum equivalent length of the main pipe should be 70m.

*6 When the first branch is a header with the outdoor total capacity codes of 12 to 26, apply the model RBM-HY2043E(4-branch) or RBM-HY2083E(8-branch) regardless of the total capacity codes of the down-stream indoor units.

3. Charging requirement with additional refrigerant

After the system has been vacuumed, replace the vacuum pump with a refrigerant cylinder and charge the system with additional refrigerant.

Calculating the amount of additional refrigerant required



Refrigerant in the system when shipped from the factory

		5HP	6HP	8HP	10HP	12HP
Refrigerant amount charged in factory	Heat pump model	8.5kg	8.5kg	12.5kg	12.5kg	12.5kg
	Cooling only model	8.0kg	8.0kg	11.0kg	11.0kg	11.0kg

When the system is charged with refrigerant at the factory, the amount of refrigerant needed for the pipes at the site is not included. Therefore, calculate the additional amount needed and add the required amount to the system.

(Calculation)

Additional refrigerant charge amount is calculated based on the size of liquid pipe at site and its real length.

Additional refrigerant charge amount at site =

Real length of liquid pipe X Additional refrigerant charge amount per liquid pipe 1m (Table 1) + Compensation by system HP (Table 2)

Example : Additional charge amount R (kg) = (L1 x 0.025kg/m) + (L2 x 0.055kg/m) + (L3 x 0.105kg/m) + (3.0kg)

L1 : Real total length of liquid pipe Ø6.4 (m)

L2 : Real total length of liquid pipe Ø9.5 (m)

L3 : Real total length of liquid pipe Ø12.7 (m)

Table 7-1

Pipe dia. at liquid side	ø6.4	ø9.5	ø12.7	ø15.9	ø19.0	ø22.2
Additional refrigerant amount/1m	0.025kg	0.055kg	0.105kg	0.160kg	0.250kg	0.350kg

Table 7-2


Combined horse power (HP)	Outdoor combination (HP)				Compensation by System HP (kg)
5	5				0.0
6	6				0.0
8	8				1.5
10	10				2.5
12	12				3.5
14	8	6			0.0
16	8	8			0.0
18	10	8			0.0
20	10	10			3.0
22	12	10			5.0
	8	8	6		0.0
24	12	12			7.0
	8	8	8		-4.0
26	10	8	8		-4.0
Combined horse power (HP)	Outdoor combination (HP)				Compensation by System HP (kg)
28	10	10	8		-2.0
30	10	10	10		0.0
32	12	10	10		1.0
	8	8	8	8	-6.0
34	12	12	10		3.0
	10	8	8	8	-6.0
36	12	12	12		4.0
	10	10	8	8	-6.0
38	10	10	10	8	-6.0
40	10	10	10	10	-5.0
42	12	10	10	10	-4.0
44	12	12	10	10	-2.0
46	12	12	12	10	0.0
48	12	12	12	12	2.0



Refrigerant cycle diagram

1. Inverter Unit (5, 6, 8, 10, 12HP)


Model: MMY-MAP0501HT, MAP0601HT, MAP0801HT, MAP1001HT, MAP1201HT

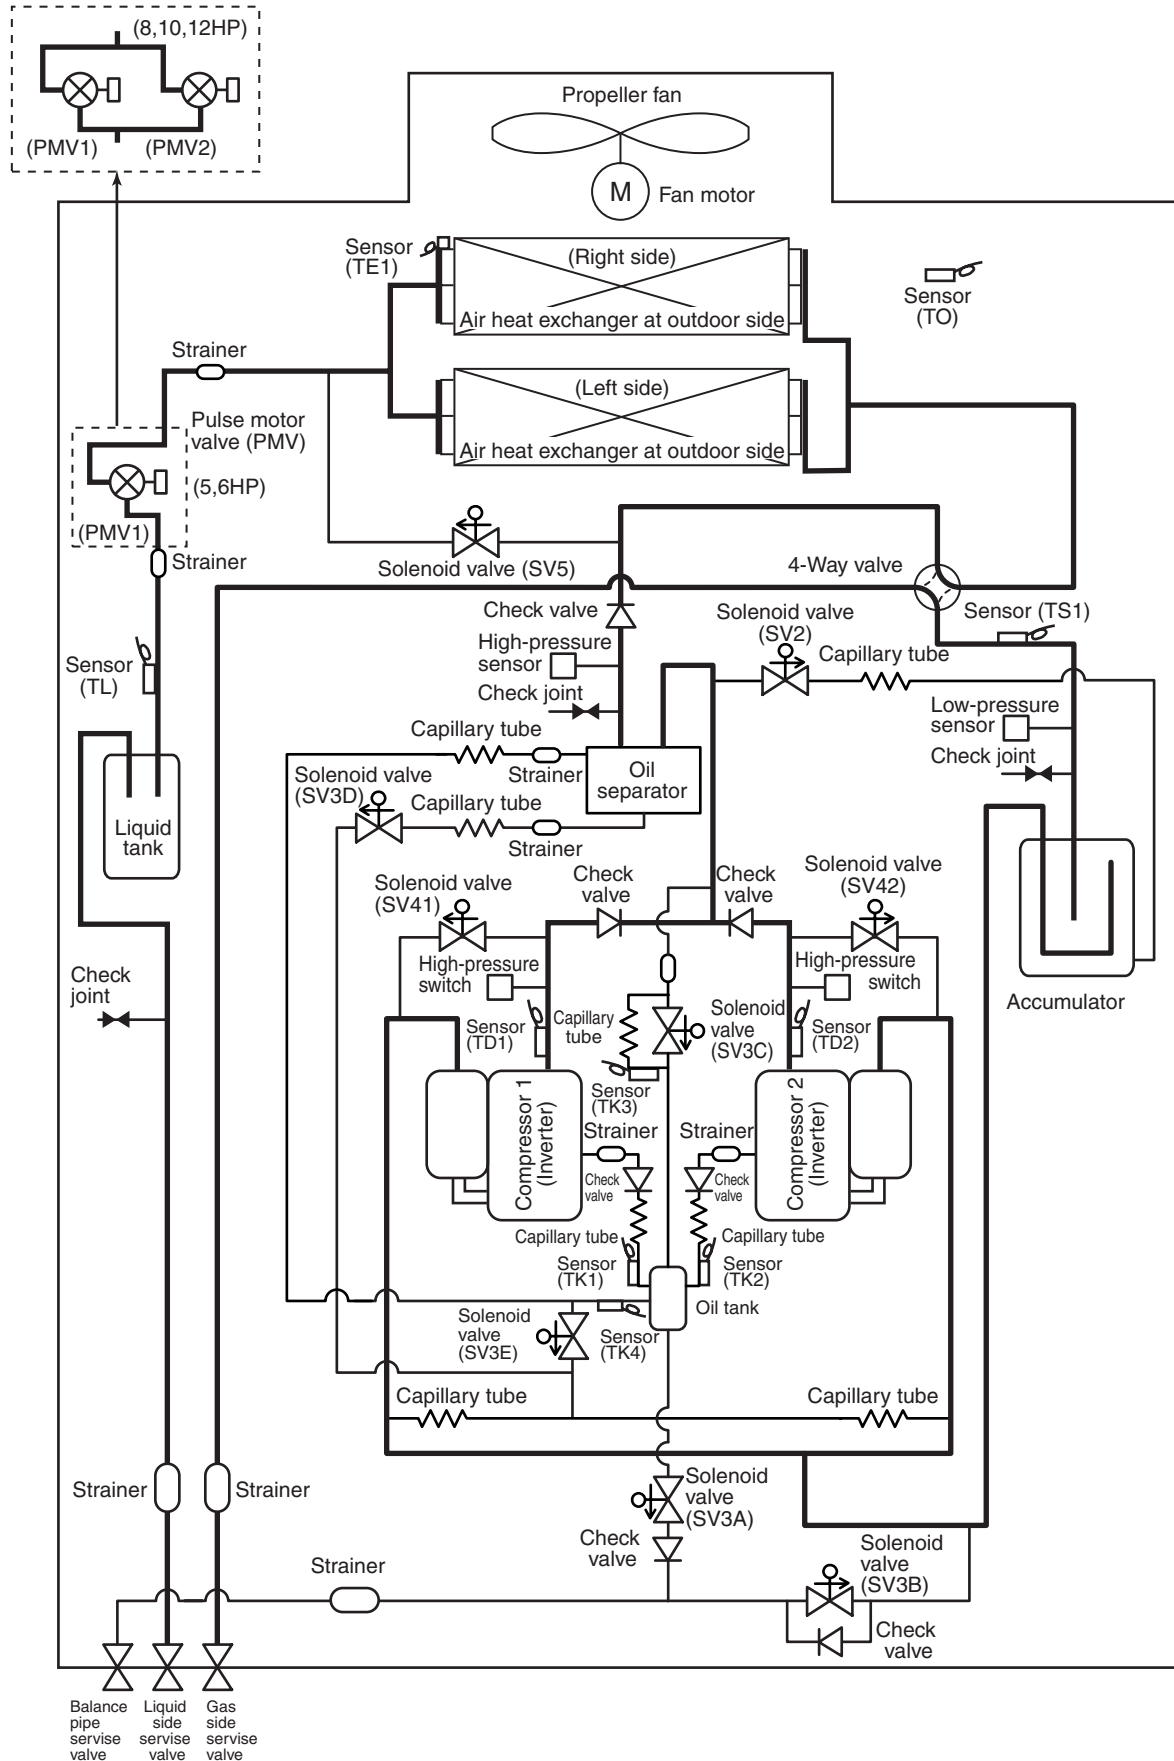

2. Explanation of Functional Parts

Functional part name		Functional outline
Solenoid valve	1.SV3A	(Connector CN324: Red) 1) Collects oil in the oil tank during OFF time. 2) Supplies oil in the oil tank during ON time.
	2.SV3B	(Connector CN313: Blue) 1) Returns oil in the balance pipe to the compressor.
	3.SV3C	(Connector CN314: Black) 1) Pressurizes oil reserved in the oil tank during operation.
	4.SV3D	(Connector CN323: White) 1) Reserves oil in the oil separator during OFF time, and supplies oil during operation.
	5.SV3E	(Connector CN323: White) 1) Turns on during operation and balances oil between the compressors.
	6.SV2	(Hot gas bypass) (Connector CN312: White) 1) Low pressure release function 2) High pressure release function 3) Gas balance during off status
	7.SV4(n)	(Start compensation valve of compressor) (Connector CN311: Blue) 1) For gas balance start 2) High pressure release function 3) Low pressure release function
	8.SV5	(Connector CN310: White) (for Heating model only) 1) Preventive function for high-pressure rising in heating operation
4-way valve		(Connector CN317: Blue) 1) Cooling/heating exchange 2) Reverse defrost
Pulse motor valve	PMV1,2	(Connector CN300, 301: White) 1) Super heat control function in heating operation 2) Liquid line shut-down function while follower unit stops 3) Under-cool adjustment function in cooling operation
Oil separator		1) Prevention for rapid decreasing of oil (Decreases oil flowing to the cycle) 2) Reserve function of surplus oil
Temp. sensor	1. TD1 TD2	(TD1: Connector, CN502: White, TD2: Connector, CN503: Pink) 1) Protection of compressor discharge temp. Used for release
	2. TS1	(Connector CN504: White) 1) Controls super heat in heating operation
	3. TE1	(Connector CN505: Green) 1) Controls defrost in heating operation 2) Controls outdoor fan in heating operation
	4. TK1, TK2, TK3, TK4	(TK1 Connector CN514: Black, TK2 Connector CN515: Green,) (TK3 Connector CN516: Red, TK4 Connector CN523: Yellow) 1) Judges oil level of the compressor
	5. TL	(Connector CN521: White) 1) Detects under cool in cooling operation
	6. TO	(Connector CN507: Yellow) 1) Detects outside temperature
Pressure sensor	1.High pressure sensor	(Connector CN501: Red) 1) Detects high pressure and controls compressor capacity 2) Detects high pressure in cooling operation, and controls the fan in low ambient cooling operation
	2. Low pressure sensor	(Connector CN500: White) 1) Detects low pressure in cooling operation and controls compressor capacity 2) Detects low pressure in heating operation, and controls the super heat
Heater	Compressor case heater	(Compressor 1 Connector CN316: White, Compressor 2 Connector CN315: Blue) 1) Prevents liquid accumulation to compressor
	Accumulator case heater	(Connector CN321: Red) 1) Prevents liquid accumulation to accumulator
Balance pipe		1) Oil balancing in each outdoor unit

3. Indoor Unit

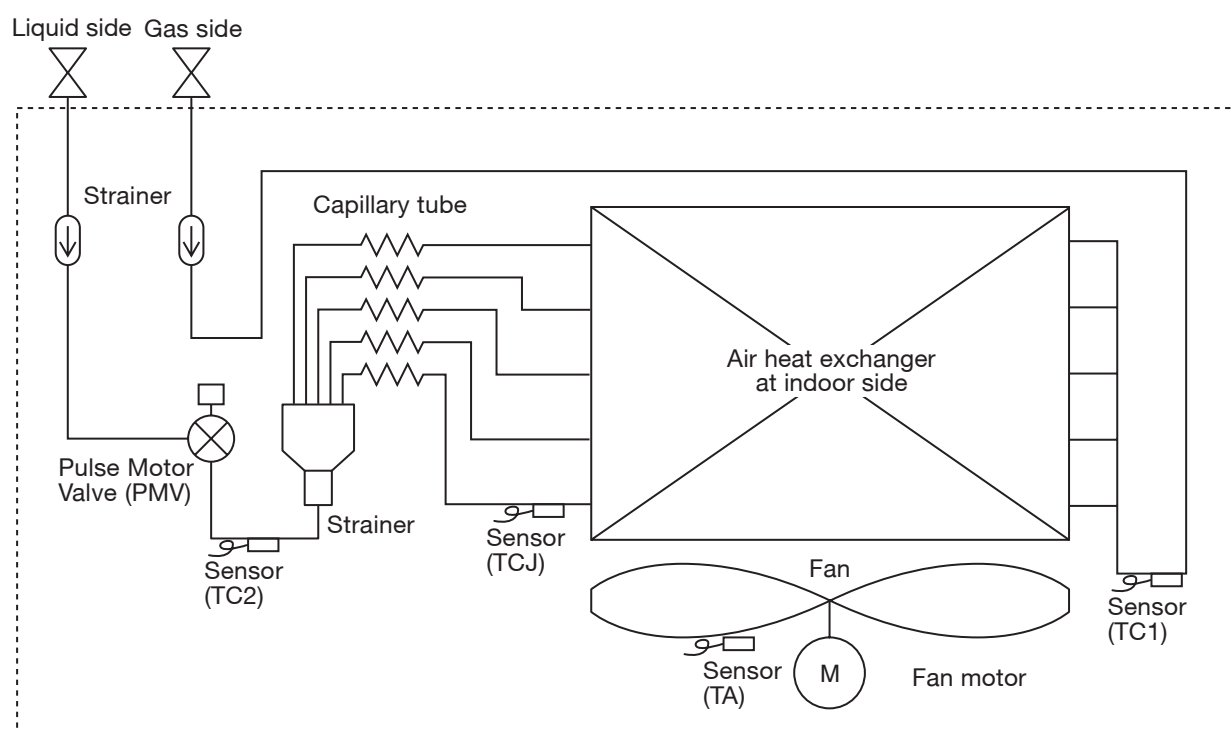


(NOTE) MMU-AP0071YH to AP0121YH type air conditioners do not have a TC2 sensor.

Functional part name		Functional outline
Pulse Motor Valve	PMV	(Connector CN082 (6P): Blue) 1)Controls super heat in cooling operation 2)Controls under cool in heating operation 3)Recovers refrigerant oil in cooling operation 4)Recovers refrigerant oil in heating operation
Temp. sensor	1. TA	(Connector CN104 (2P): Yellow) 1)Detects indoor suction temperature
	2. TC1	(Connector CN100 (3P): Brown) 1)Controls PMV super heat in cooling operation
	3. TC2	(Connector CN101 (2P): Black) 1)Controls PMV under cool in heating operation
	4. TCJ	(Connector CN102 (2P): Red) 1)Controls PMV super heat in cooling operation 2) [MMU-AP0071 to AP0121YH only] Controls PMV under cool in heating operation

COMBINED REFRIGERANT PIPES SYSTEMATIC DRAWING

1. Normal Operation (COOL Mode / DEFROST Mode)

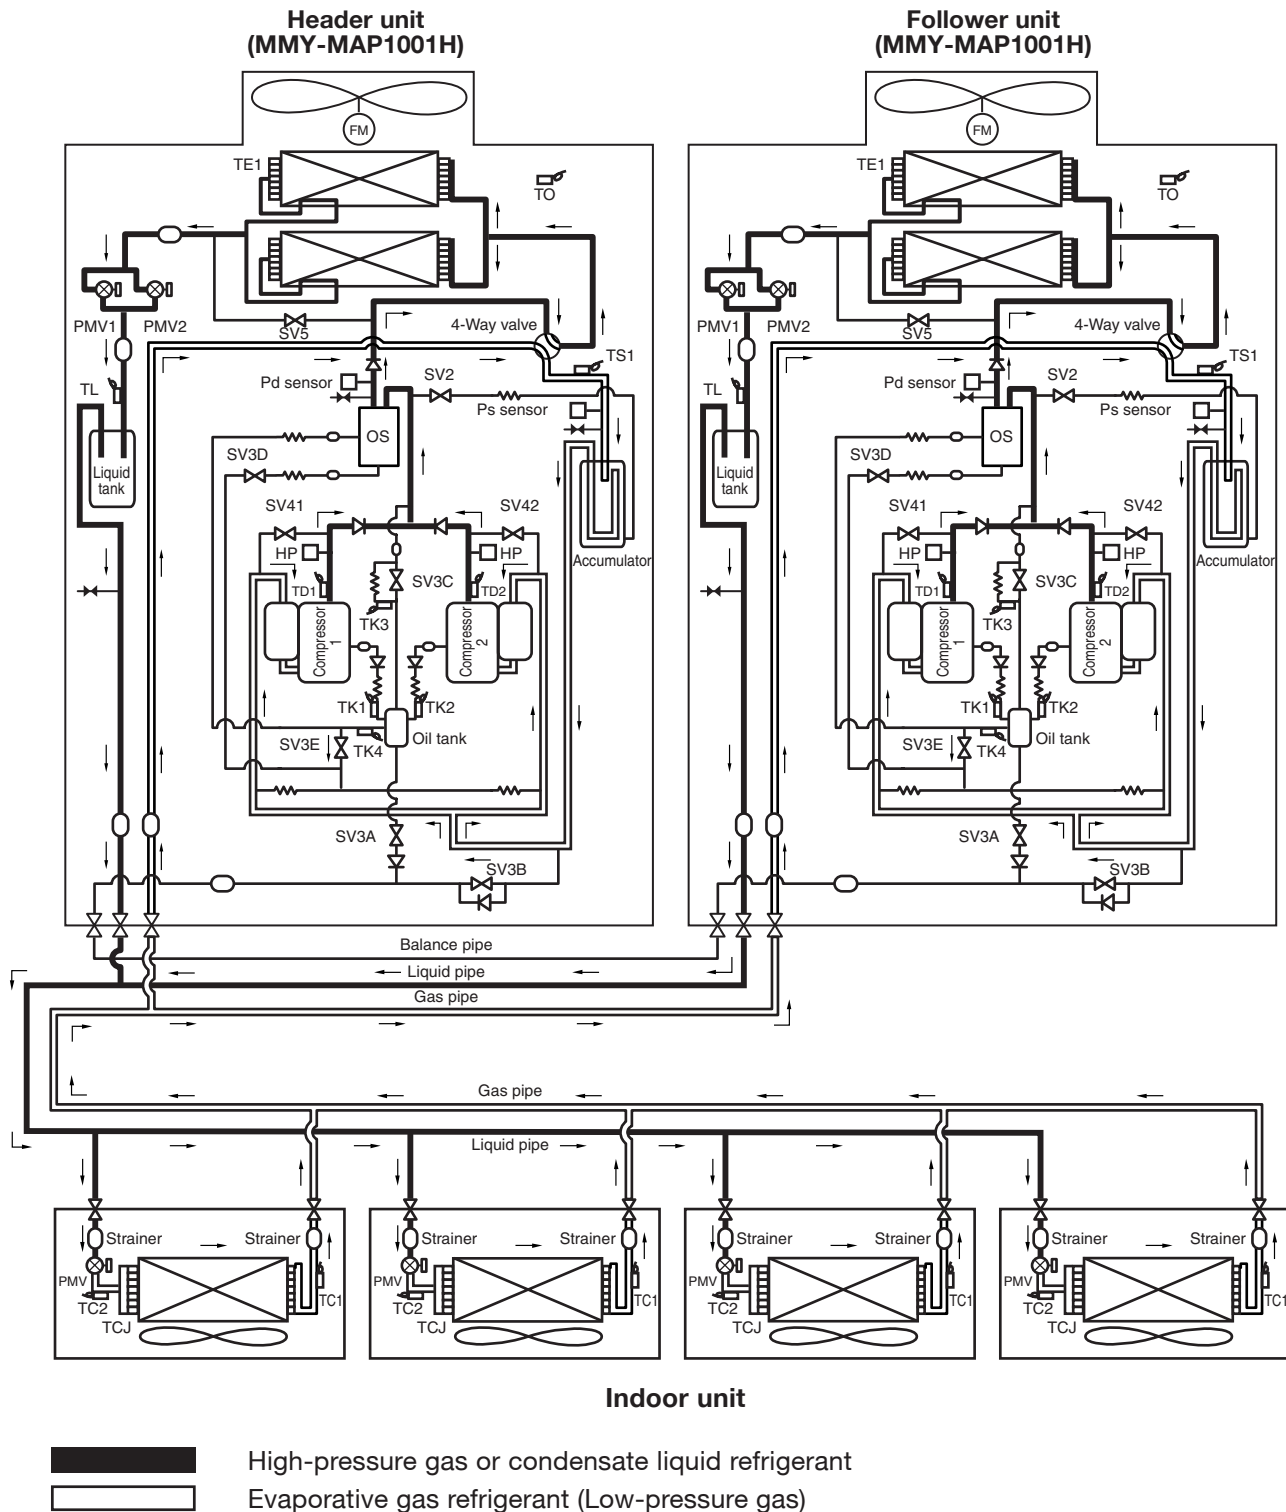


NOTE

An outdoor unit which is connected with indoor/outdoor communication lines is referred to as the "Header unit", and the other unit is called the "Follower unit".

(Example: 20HP system)

2. Normal Operation (HEAT Mode)

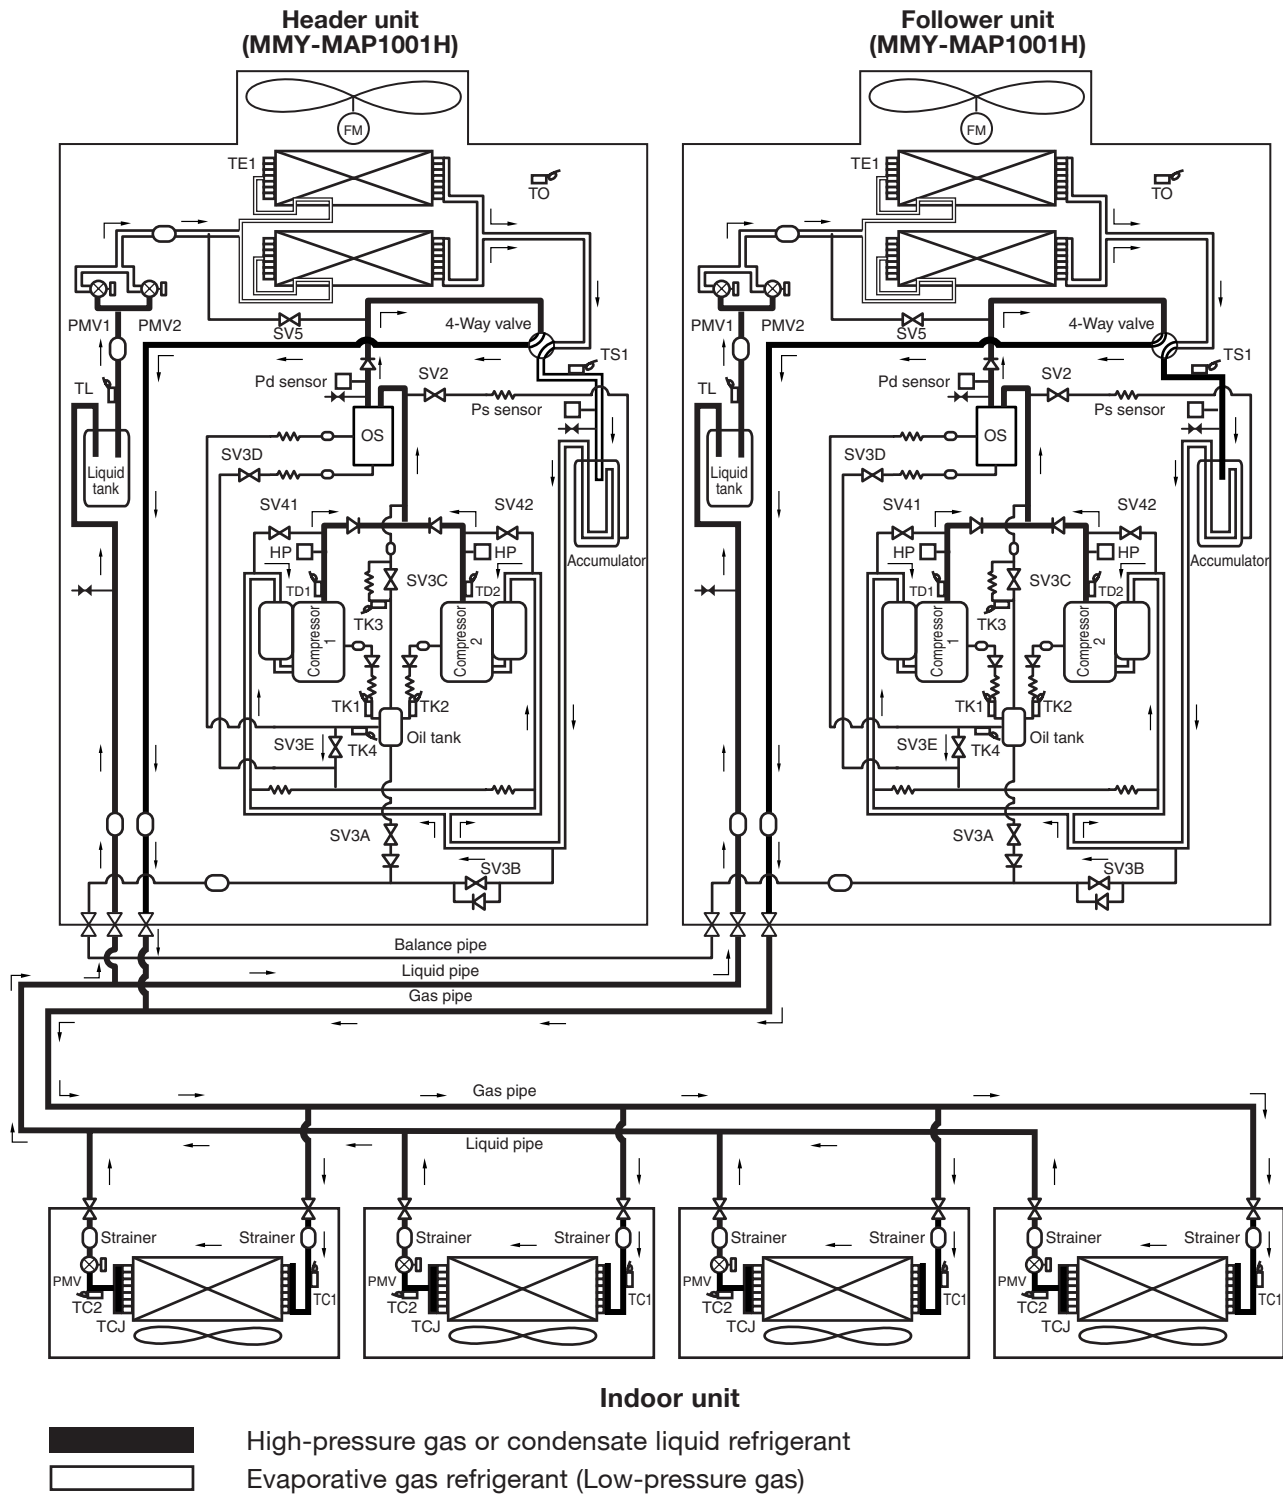


NOTE

An outdoor unit which is connected with indoor/outdoor communication lines is referred to as the "Header unit", and the other unit is called the "Follower unit".

(Example: 20HP system)

3. Backup Operation (Cooling Operation when Header Outdoor unit failure)

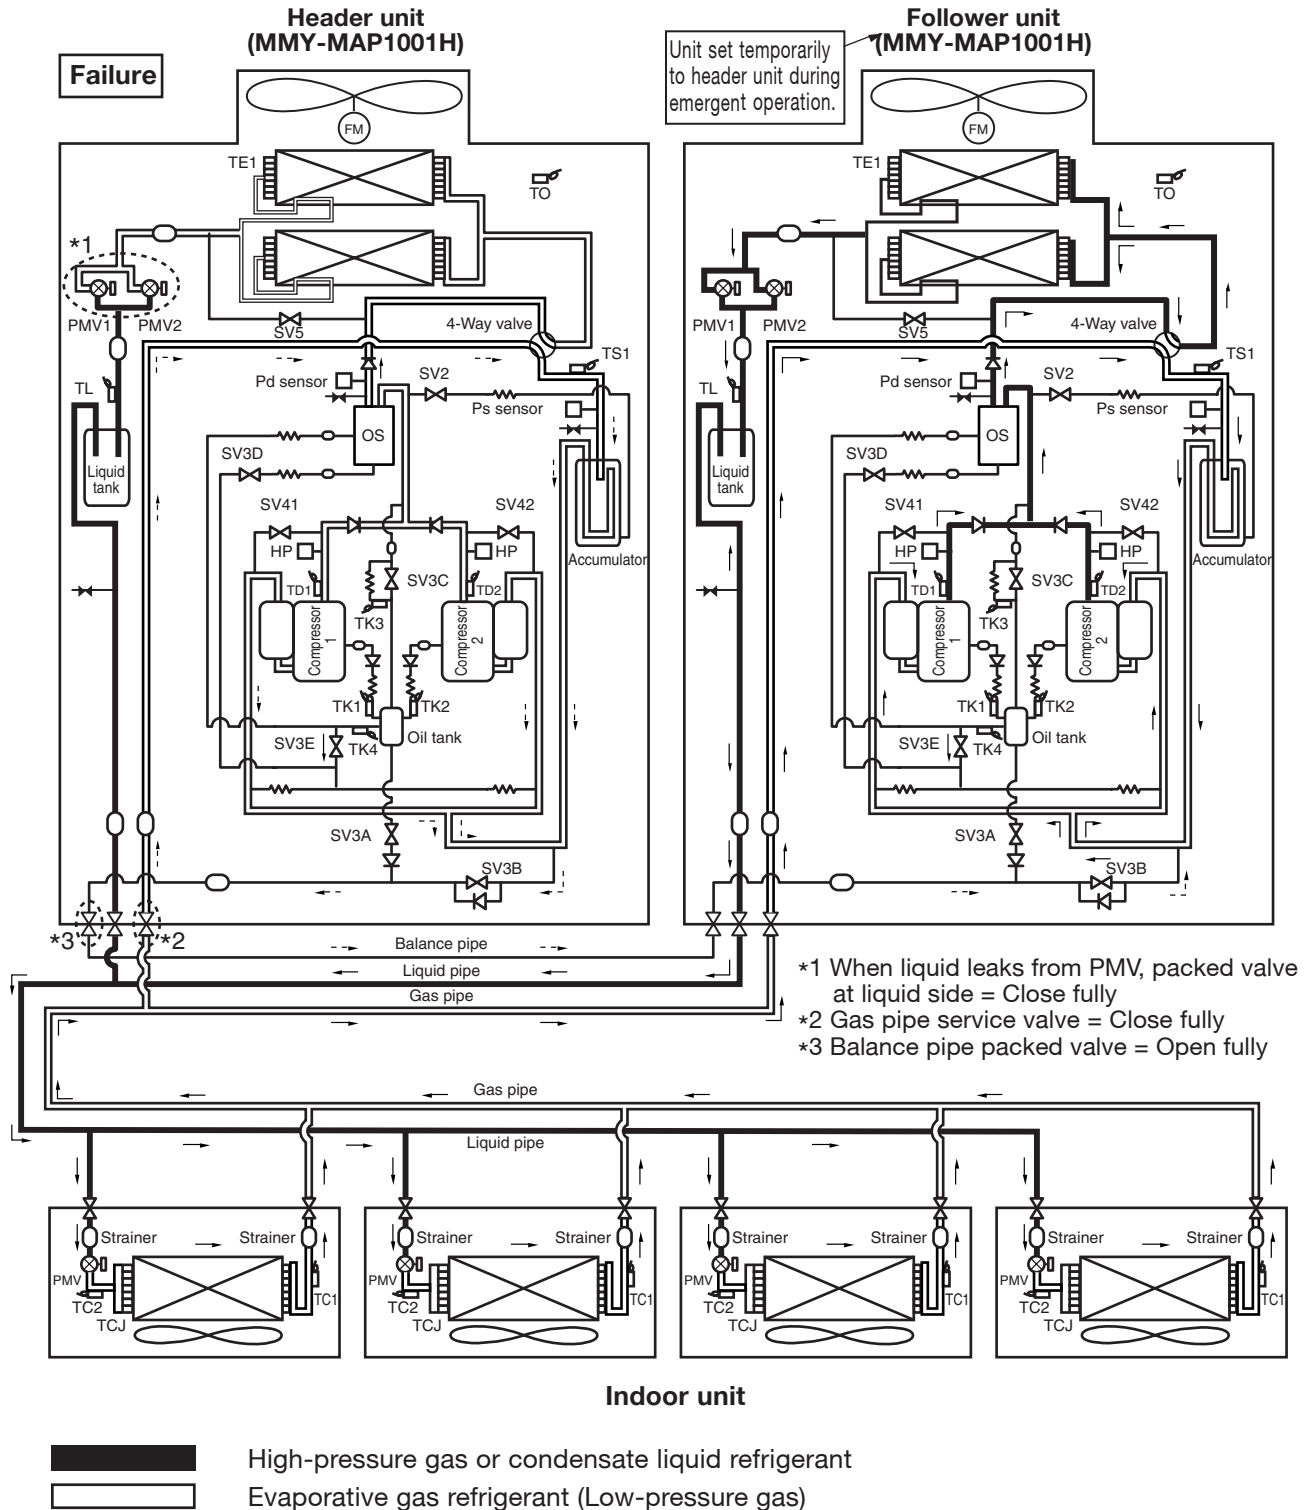


NOTE


An outdoor unit which is connected with indoor/outdoor communication lines is referred to as the "Header unit", and the other unit is called the "Follower unit".

(Example: 20HP system)

4. Emergent Operation (Heating Operation when Header Outdoor unit failure)

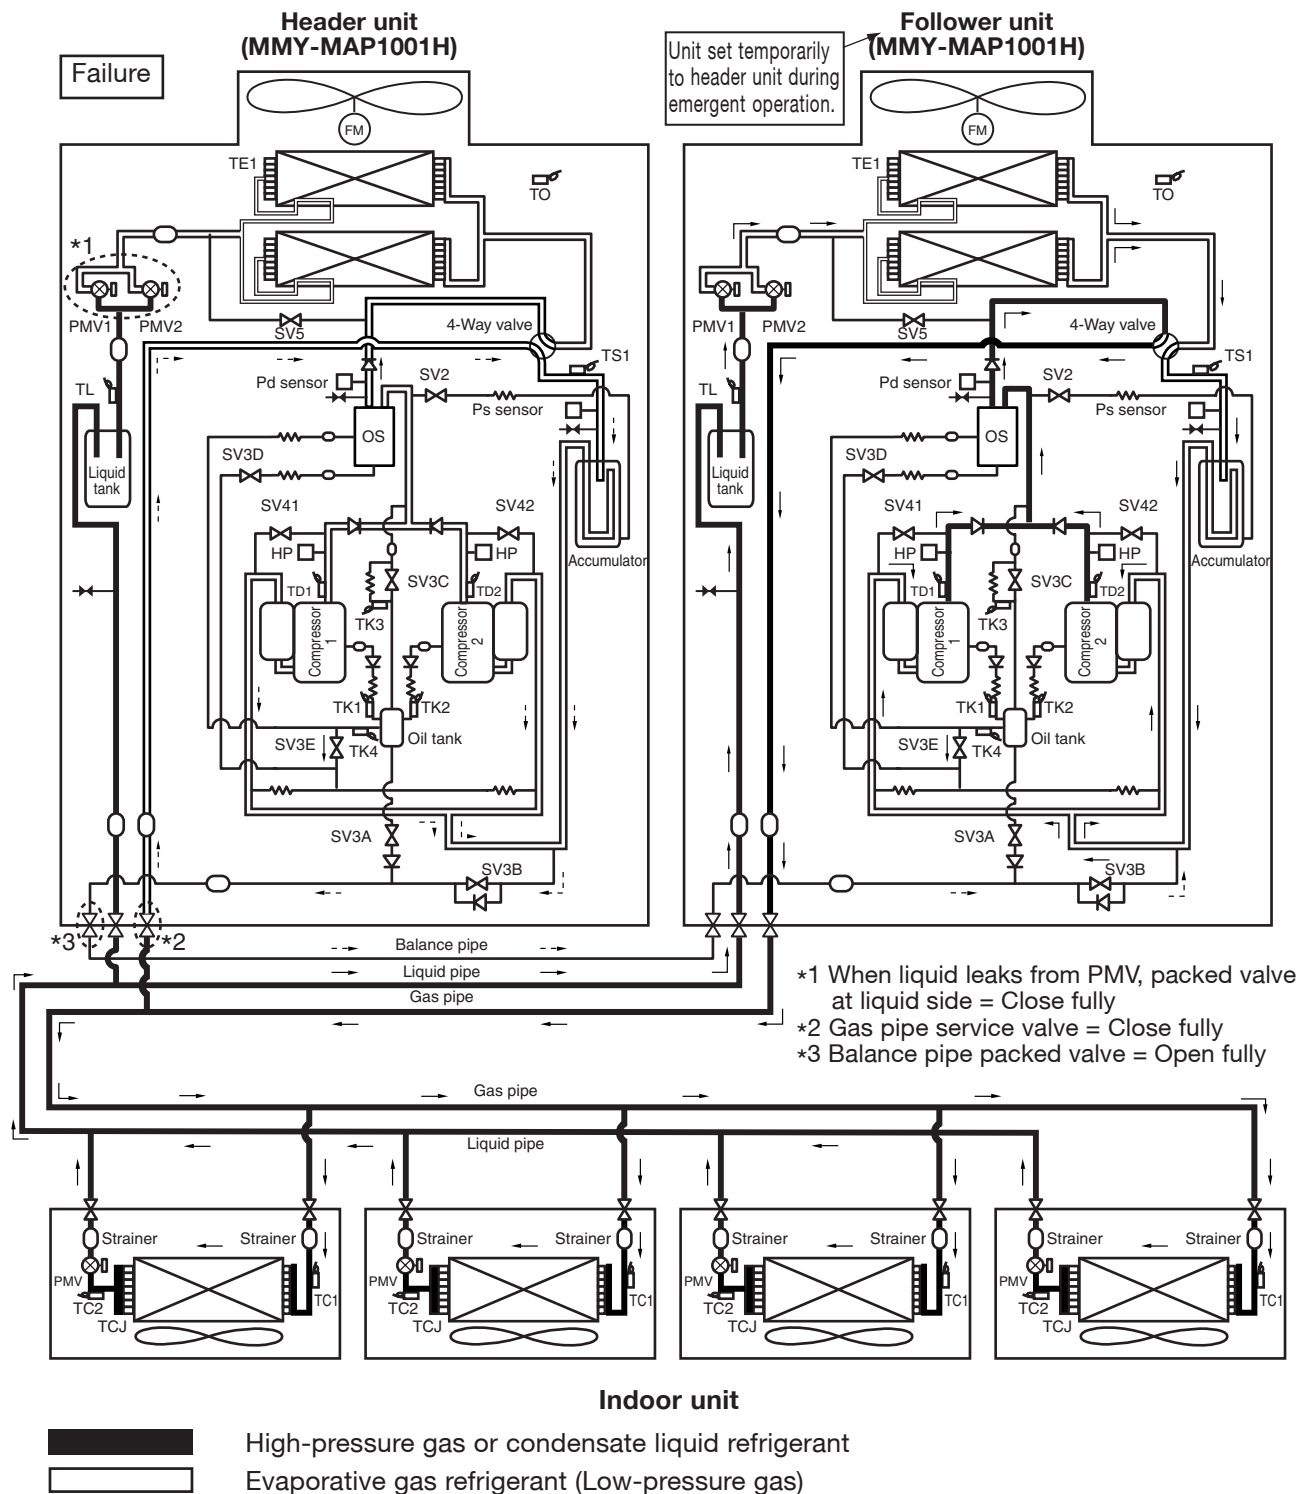

5. Recovery of Refrigerant in Failed Outdoor Unit (In Case of Failure of Follower Unit)

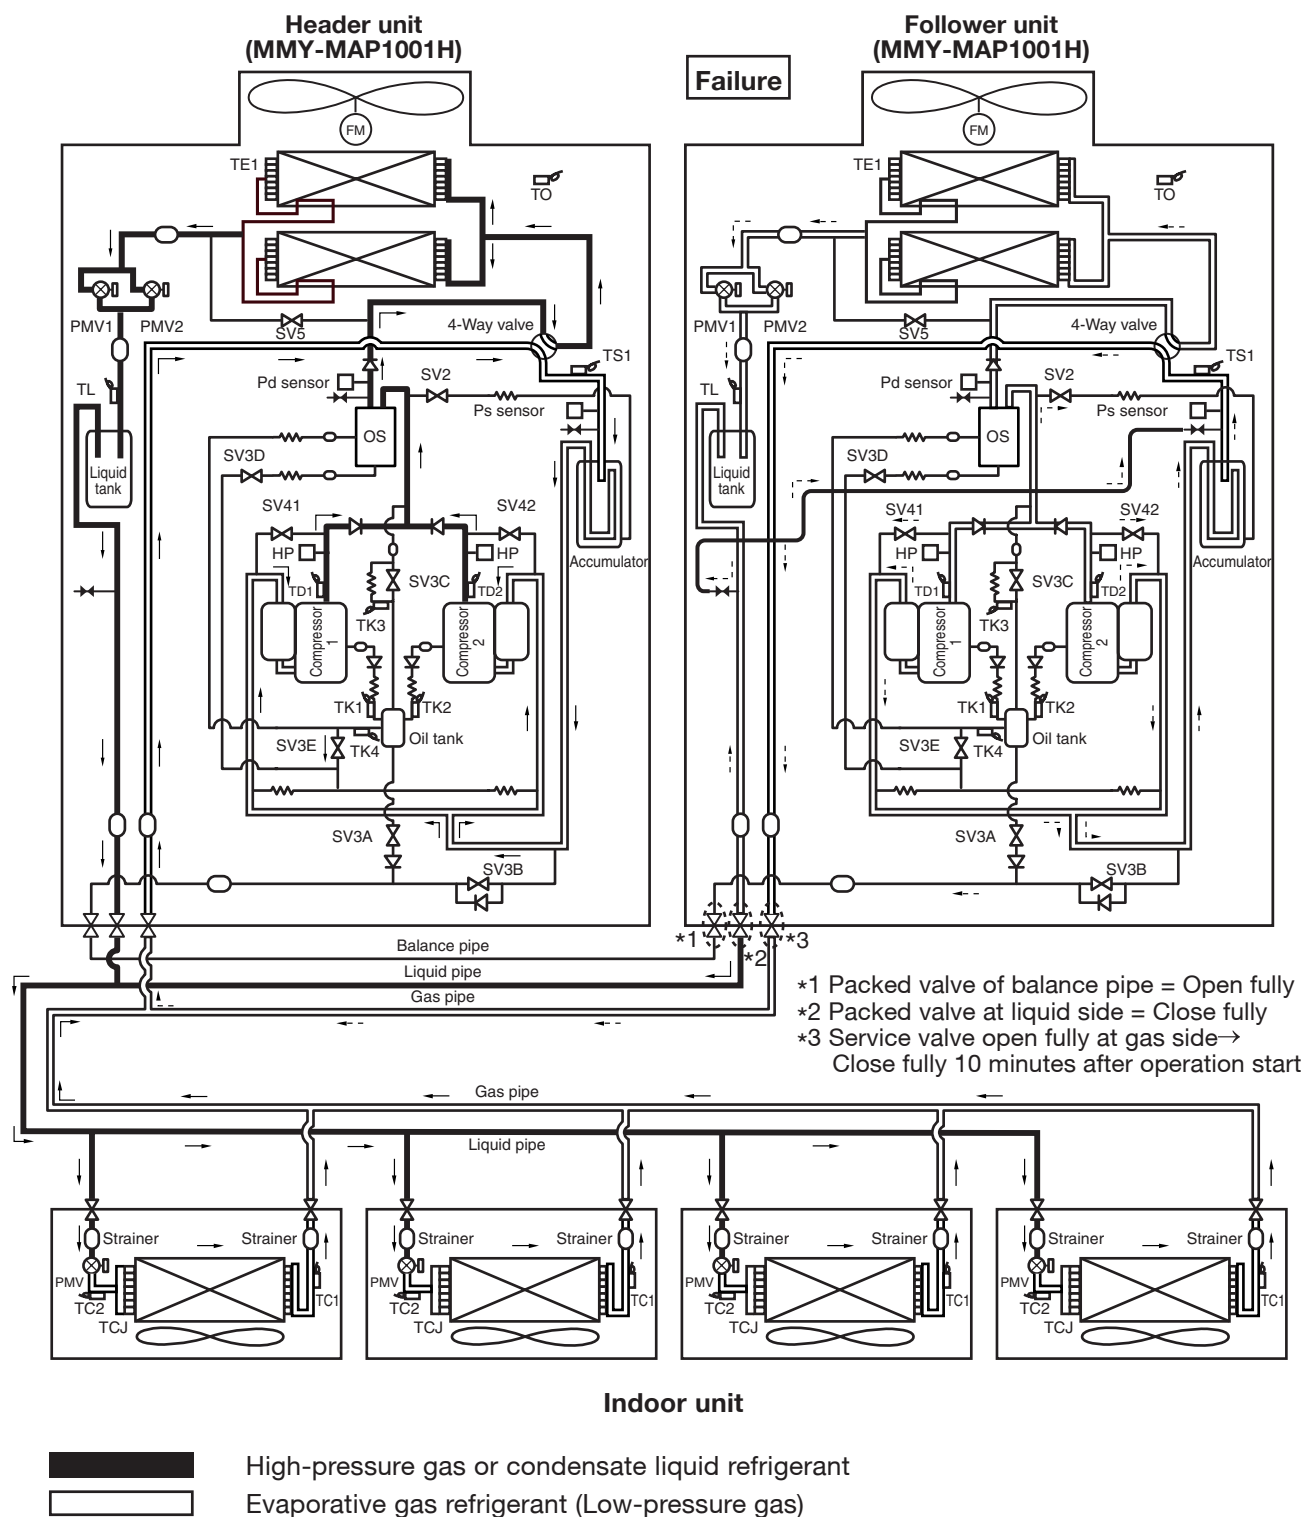

NOTE

An outdoor unit which is connected with indoor/outdoor communication lines is referred to as "Header unit", and the other unit is called the "Follower unit".

(Example: 20HP system)



Sensible capacity table

4-way Discharge Cassette Type (MMU-AP****H)

TC : Total capacity [kW]

SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
009	10.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	12.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	14.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	16.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	18.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	20.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	21.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	23.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	25.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	27.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	29.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	31.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	33.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	35.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	37.0	2.2	1.8	2.5	1.9	2.6	2.0	2.7	2.0	2.8	2.0	3.0	2.0	3.1	2.0
	39.0	2.2	1.8	2.4	1.9	2.6	2.0	2.6	2.0	2.7	2.0	2.9	2.0	3.0	1.9
012	10.0	3.0	2.3	3.3	2.5	3.5	2.6	3.6	2.6	3.7	2.6	3.9	2.6	4.1	2.5
	12.0	3.0	2.3	3.3	2.5	3.5	2.6	3.6	2.6	3.7	2.6	3.9	2.6	4.1	2.5
	14.0	3.0	2.3	3.3	2.5	3.5	2.6	3.6	2.6	3.7	2.6	3.9	2.6	4.1	2.5
	16.0	3.0	2.3	3.3	2.5	3.5	2.6	3.6	2.6	3.7	2.6	3.9	2.6	4.1	2.5
	18.0	3.0	2.3	3.3	2.5	3.5	2.6	3.6	2.6	3.7	2.6	3.9	2.6	4.1	2.5
	20.0	3.0	2.3	3.3	2.5	3.5	2.6	3.6	2.6	3.7	2.6	3.9	2.6	4.1	2.5
	21.0	3.0	2.3	3.3	2.5	3.5	2.6	3.6	2.6	3.7	2.6	3.9	2.6	4.1	2.5
	23.0	3.0	2.3	3.3	2.5	3.5	2.6	3.6	2.6	3.7	2.6	3.9	2.6	4.1	2.5
	25.0	3.0	2.3	3.3	2.5	3.5	2.6	3.6	2.6	3.7	2.6	3.9	2.6	4.1	2.5
	27.0	3.0	2.3	3.3	2.5	3.5	2.6	3.6	2.6	3.7	2.6	3.9	2.6	4.1	2.5
	29.0	3.0	2.3	3.3	2.5	3.5	2.6	3.6	2.6	3.7	2.6	3.9	2.6	4.1	2.5
	31.0	3.0	2.3	3.3	2.5	3.5	2.6	3.6	2.6	3.7	2.6	3.9	2.6	4.1	2.5
	33.0	3.0	2.3	3.3	2.5	3.5	2.6	3.6	2.6	3.7	2.6	3.9	2.6	4.1	2.5
	35.0	3.0	2.3	3.3	2.5	3.5	2.6	3.6	2.6	3.7	2.6	3.9	2.6	4.1	2.5
	37.0	2.9	2.2	3.2	2.4	3.4	2.5	3.5	2.5	3.6	2.5	3.8	2.5	4.0	2.4
	39.0	2.8	2.2	3.1	2.3	3.3	2.5	3.4	2.4	3.5	2.4	3.7	2.4	3.9	2.4
015	10.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	12.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	14.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	16.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	18.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	20.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	21.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	23.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	25.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	27.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	29.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	31.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	33.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	35.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	37.0	3.6	2.7	4.0	2.9	4.2	3.1	4.4	3.1	4.5	3.1	4.7	3.1	5.0	3.0
	39.0	3.5	2.7	3.8	2.8	4.1	3.0	4.2	3.0	4.4	3.0	4.6	3.0	4.8	2.9
018	10.0	4.6	3.5	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	12.0	4.6	3.5	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	14.0	4.6	3.5	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	16.0	4.6	3.5	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	18.0	4.6	3.5	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	20.0	4.6	3.5	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	21.0	4.6	3.5	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	23.0	4.6	3.5	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	25.0	4.6	3.5	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	27.0	4.6	3.5	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	29.0	4.6	3.5	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	31.0	4.6	3.5	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	33.0	4.6	3.5	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	35.0	4.6	3.5	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	37.0	4.5	3.4	4.9	3.7	5.3	3.9	5.4	3.9	5.6	3.9	5.9	3.8	6.2	3.7
	39.0	4.3	3.3	4.8	3.6	5.1	3.8	5.3	3.8	5.4	3.8	5.7	3.7	6.0	3.6

4-way Discharge Cassette Type (MMU-AP****H)

TC : Total capacity [kW]

SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
024	10.0	5.8	4.3	6.4	4.6	6.9	4.9	7.1	4.9	7.3	4.9	7.7	4.9	8.1	4.7
	12.0	5.8	4.3	6.4	4.6	6.9	4.9	7.1	4.9	7.3	4.9	7.7	4.9	8.1	4.7
	14.0	5.8	4.3	6.4	4.6	6.9	4.9	7.1	4.9	7.3	4.9	7.7	4.9	8.1	4.7
	16.0	5.8	4.3	6.4	4.6	6.9	4.9	7.1	4.9	7.3	4.9	7.7	4.9	8.1	4.7
	18.0	5.8	4.3	6.4	4.6	6.9	4.9	7.1	4.9	7.3	4.9	7.7	4.9	8.1	4.7
	20.0	5.8	4.3	6.4	4.6	6.9	4.9	7.1	4.9	7.3	4.9	7.7	4.9	8.1	4.7
	21.0	5.8	4.3	6.4	4.6	6.9	4.9	7.1	4.9	7.3	4.9	7.7	4.9	8.1	4.7
	23.0	5.8	4.3	6.4	4.6	6.9	4.9	7.1	4.9	7.3	4.9	7.7	4.9	8.1	4.7
	25.0	5.8	4.3	6.4	4.6	6.9	4.9	7.1	4.9	7.3	4.9	7.7	4.9	8.1	4.7
	27.0	5.8	4.3	6.4	4.6	6.9	4.9	7.1	4.9	7.3	4.9	7.7	4.9	8.1	4.7
	29.0	5.8	4.3	6.4	4.6	6.9	4.9	7.1	4.9	7.3	4.9	7.7	4.9	8.1	4.7
	31.0	5.8	4.3	6.4	4.6	6.9	4.9	7.1	4.9	7.3	4.9	7.7	4.9	8.1	4.7
	33.0	5.8	4.3	6.4	4.6	6.9	4.9	7.1	4.9	7.3	4.9	7.7	4.9	8.1	4.7
	35.0	5.8	4.3	6.4	4.6	6.9	4.9	7.1	4.9	7.3	4.9	7.7	4.9	8.1	4.7
	37.0	5.6	4.2	6.2	4.5	6.7	4.8	6.9	4.7	7.1	4.7	7.5	4.7	7.8	4.6
	39.0	5.5	4.1	6.1	4.4	6.5	4.6	6.7	4.6	6.9	4.6	7.3	4.6	7.6	4.5
027	10.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	12.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	14.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	16.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	18.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	20.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	21.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	23.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	25.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	27.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	29.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	31.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	33.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	35.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	37.0	6.4	4.7	7.0	5.0	7.5	5.3	7.7	5.3	8.0	5.3	8.4	5.3	8.8	5.2
	39.0	6.2	4.6	6.8	4.9	7.3	5.2	7.5	5.2	7.8	5.2	8.2	5.1	8.6	5.0
030	10.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	12.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	14.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	16.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	18.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	20.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	21.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	23.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	25.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	27.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	29.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	31.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	33.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	35.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	37.0	7.2	5.3	7.9	5.7	8.5	6.0	8.7	6.0	9.0	6.0	9.5	5.9	9.9	5.8
	39.0	7.0	5.2	7.7	5.5	8.2	5.9	8.5	5.8	8.7	5.8	9.2	5.8	9.7	5.6
036	10.0	9.2	6.8	10.2	7.3	10.9	7.7	11.2	7.7	11.5	7.7	12.2	7.6	12.8	7.5
	12.0	9.2	6.8	10.2	7.3	10.9	7.7	11.2	7.7	11.5	7.7	12.2	7.6	12.8	7.5
	14.0	9.2	6.8	10.2	7.3	10.9	7.7	11.2	7.7	11.5	7.7	12.2	7.6	12.8	7.5
	16.0	9.2	6.8	10.2	7.3	10.9	7.7	11.2	7.7	11.5	7.7	12.2	7.6	12.8	7.5
	18.0	9.2	6.8	10.2	7.3	10.9	7.7	11.2	7.7	11.5	7.7	12.2	7.6	12.8	7.5
	20.0	9.2	6.8	10.2	7.3	10.9	7.7	11.2	7.7	11.5	7.7	12.2	7.6	12.8	7.5
	21.0	9.2	6.8	10.2	7.3	10.9	7.7	11.2	7.7	11.5	7.7	12.2	7.6	12.8	7.5
	23.0	9.2	6.8	10.2	7.3	10.9	7.7	11.2	7.7	11.5	7.7	12.2	7.6	12.8	7.5
	25.0	9.2	6.8	10.2	7.3	10.9	7.7	11.2	7.7	11.5	7.7	12.2	7.6	12.8	7.5
	27.0	9.2	6.8	10.2	7.3	10.9	7.7	11.2	7.7	11.5	7.7	12.2	7.6	12.8	7.5
	29.0	9.2	6.8	10.2	7.3	10.9	7.7	11.2	7.7	11.5	7.7	12.2	7.6	12.8	7.5
	31.0	9.2	6.8	10.2	7.3	10.9	7.7	11.2	7.7	11.5	7.7	12.2	7.6	12.8	7.5
	33.0	9.2	6.8	10.2	7.3	10.9	7.7	11.2	7.7	11.5	7.7	12.2	7.6	12.8	7.5
	35.0	9.2	6.8	10.2	7.3	10.9	7.7	11.2	7.7	11.5	7.7	12.2	7.6	12.8	7.5
	37.0	8.9	6.6	9.8	7.0	10.5	7.5	10.8	7.5	11.2	7.5	11.8	7.4	12.4	7.2
	39.0	8.7	6.4	9.6	6.8	10.2	7.3	10.5	7.2	10.9	7.2	11.5	7.2	12.0	7.0

4-way Discharge Cassette Type (MMU-AP****H)

TC : Total capacity [kW]

SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
048	10.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	12.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	14.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	16.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	18.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	20.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	21.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	23.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	25.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	27.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	29.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	31.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	33.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	35.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
056	37.0	11.1	8.4	12.3	9.0	13.1	9.5	13.6	9.5	14.0	9.5	14.8	9.4	15.4	9.2
	39.0	10.8	8.2	12.0	8.7	12.8	9.2	13.2	9.2	13.6	9.2	14.4	9.1	15.0	8.9
	10.0	13.1	9.8	14.5	10.4	15.5	11.0	16.0	11.0	16.5	11.0	17.4	10.9	18.2	10.6
	12.0	13.1	9.8	14.5	10.4	15.5	11.0	16.0	11.0	16.5	11.0	17.4	10.9	18.2	10.6
	14.0	13.1	9.8	14.5	10.4	15.5	11.0	16.0	11.0	16.5	11.0	17.4	10.9	18.2	10.6
	16.0	13.1	9.8	14.5	10.4	15.5	11.0	16.0	11.0	16.5	11.0	17.4	10.9	18.2	10.6
	18.0	13.1	9.8	14.5	10.4	15.5	11.0	16.0	11.0	16.5	11.0	17.4	10.9	18.2	10.6
	20.0	13.1	9.8	14.5	10.4	15.5	11.0	16.0	11.0	16.5	11.0	17.4	10.9	18.2	10.6
	21.0	13.1	9.8	14.5	10.4	15.5	11.0	16.0	11.0	16.5	11.0	17.4	10.9	18.2	10.6
	23.0	13.1	9.8	14.5	10.4	15.5	11.0	16.0	11.0	16.5	11.0	17.4	10.9	18.2	10.6
	25.0	13.1	9.8	14.5	10.4	15.5	11.0	16.0	11.0	16.5	11.0	17.4	10.9	18.2	10.6
	27.0	13.1	9.8	14.5	10.4	15.5	11.0	16.0	11.0	16.5	11.0	17.4	10.9	18.2	10.6
	29.0	13.1	9.8	14.5	10.4	15.5	11.0	16.0	11.0	16.5	11.0	17.4	10.9	18.2	10.6
	31.0	13.1	9.8	14.5	10.4	15.5	11.0	16.0	11.0	16.5	11.0	17.4	10.9	18.2	10.6
	33.0	13.1	9.8	14.5	10.4	15.5	11.0	16.0	11.0	16.5	11.0	17.4	10.9	18.2	10.6
	35.0	13.1	9.8	14.5	10.4	15.5	11.0	16.0	11.0	16.5	11.0	17.4	10.9	18.2	10.6
	37.0	12.7	9.4	14.1	10.1	15.0	10.7	15.5	10.6	16.0	10.6	16.9	10.5	17.7	10.3
	39.0	12.4	9.2	13.7	9.8	14.6	10.4	15.1	10.4	15.5	10.4	16.4	10.3	17.2	10.0

2-way Air Discharge Cassette Type (MMU-AP****WH)

TC : Total capacity [kW] SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
007	10.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	12.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	14.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	16.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	18.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	20.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	21.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	23.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	25.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	27.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	29.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	31.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	33.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	35.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
009	10.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	12.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	14.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	16.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	18.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	20.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	21.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	23.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	25.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	27.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	29.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	31.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	33.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	35.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
012	10.0	3.0	2.0	3.3	2.2	3.5	2.3	3.6	2.3	3.7	2.3	3.9	2.3	4.1	2.2
	12.0	3.0	2.0	3.3	2.2	3.5	2.3	3.6	2.3	3.7	2.3	3.9	2.3	4.1	2.2
	14.0	3.0	2.0	3.3	2.2	3.5	2.3	3.6	2.3	3.7	2.3	3.9	2.3	4.1	2.2
	16.0	3.0	2.0	3.3	2.2	3.5	2.3	3.6	2.3	3.7	2.3	3.9	2.3	4.1	2.2
	18.0	3.0	2.0	3.3	2.2	3.5	2.3	3.6	2.3	3.7	2.3	3.9	2.3	4.1	2.2
	20.0	3.0	2.0	3.3	2.2	3.5	2.3	3.6	2.3	3.7	2.3	3.9	2.3	4.1	2.2
	21.0	3.0	2.0	3.3	2.2	3.5	2.3	3.6	2.3	3.7	2.3	3.9	2.3	4.1	2.2
	23.0	3.0	2.0	3.3	2.2	3.5	2.3	3.6	2.3	3.7	2.3	3.9	2.3	4.1	2.2
	25.0	3.0	2.0	3.3	2.2	3.5	2.3	3.6	2.3	3.7	2.3	3.9	2.3	4.1	2.2
	27.0	3.0	2.0	3.3	2.2	3.5	2.3	3.6	2.3	3.7	2.3	3.9	2.3	4.1	2.2
	29.0	3.0	2.0	3.3	2.2	3.5	2.3	3.6	2.3	3.7	2.3	3.9	2.3	4.1	2.2
	31.0	3.0	2.0	3.3	2.2	3.5	2.3	3.6	2.3	3.7	2.3	3.9	2.3	4.1	2.2
	33.0	3.0	2.0	3.3	2.2	3.5	2.3	3.6	2.3	3.7	2.3	3.9	2.3	4.1	2.2
	35.0	3.0	2.0	3.3	2.2	3.5	2.3	3.6	2.3	3.7	2.3	3.9	2.3	4.1	2.2
015	10.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	12.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	14.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	16.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	18.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	20.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	21.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	23.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	25.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	27.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	29.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	31.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	33.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	35.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	37.0	3.6	2.6	4.0	2.8	4.2	3.0	4.4	3.0	4.5	3.0	4.7	2.9	5.0	2.9
	39.0	3.5	2.5	3.8	2.7	4.1	2.9	4.2	2.9	4.4	2.9	4.6	2.8	4.8	2.8

2-way Air Discharge Cassette Type (MMU-AP****WH) TC : Total capacity [kW] SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
018	10.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	12.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	14.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	16.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	18.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	20.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	21.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	23.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	25.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	27.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	29.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	31.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	33.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	35.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	37.0	4.5	3.3	4.9	3.5	5.3	3.7	5.4	3.7	5.6	3.7	5.9	3.6	6.2	3.6
	39.0	4.3	3.2	4.8	3.4	5.1	3.6	5.3	3.6	5.4	3.6	5.7	3.5	6.0	3.5
024	10.0	5.8	4.3	6.4	4.5	6.9	4.8	7.1	4.8	7.3	4.8	7.7	4.8	8.1	4.6
	12.0	5.8	4.3	6.4	4.5	6.9	4.8	7.1	4.8	7.3	4.8	7.7	4.8	8.1	4.6
	14.0	5.8	4.3	6.4	4.5	6.9	4.8	7.1	4.8	7.3	4.8	7.7	4.8	8.1	4.6
	16.0	5.8	4.3	6.4	4.5	6.9	4.8	7.1	4.8	7.3	4.8	7.7	4.8	8.1	4.6
	18.0	5.8	4.3	6.4	4.5	6.9	4.8	7.1	4.8	7.3	4.8	7.7	4.8	8.1	4.6
	20.0	5.8	4.3	6.4	4.5	6.9	4.8	7.1	4.8	7.3	4.8	7.7	4.8	8.1	4.6
	21.0	5.8	4.3	6.4	4.5	6.9	4.8	7.1	4.8	7.3	4.8	7.7	4.8	8.1	4.6
	23.0	5.8	4.3	6.4	4.5	6.9	4.8	7.1	4.8	7.3	4.8	7.7	4.8	8.1	4.6
	25.0	5.8	4.3	6.4	4.5	6.9	4.8	7.1	4.8	7.3	4.8	7.7	4.8	8.1	4.6
	27.0	5.8	4.3	6.4	4.5	6.9	4.8	7.1	4.8	7.3	4.8	7.7	4.8	8.1	4.6
	29.0	5.8	4.3	6.4	4.5	6.9	4.8	7.1	4.8	7.3	4.8	7.7	4.8	8.1	4.6
	31.0	5.8	4.3	6.4	4.5	6.9	4.8	7.1	4.8	7.3	4.8	7.7	4.8	8.1	4.6
	33.0	5.8	4.3	6.4	4.5	6.9	4.8	7.1	4.8	7.3	4.8	7.7	4.8	8.1	4.6
	35.0	5.8	4.3	6.4	4.5	6.9	4.8	7.1	4.8	7.3	4.8	7.7	4.8	8.1	4.6
	37.0	5.6	4.1	6.2	4.4	6.7	4.7	6.9	4.6	7.1	4.6	7.5	4.6	7.8	4.5
	39.0	5.5	4.0	6.1	4.3	6.5	4.5	6.7	4.5	6.9	4.5	7.3	4.5	7.6	4.4
027	10.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	12.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	14.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	16.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	18.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	20.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	21.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	23.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	25.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	27.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	29.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	31.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	33.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	35.0	6.6	4.9	7.3	5.2	7.8	5.5	8.0	5.5	8.2	5.5	8.7	5.4	9.1	5.3
	37.0	6.4	4.7	7.0	5.0	7.5	5.3	7.7	5.3	8.0	5.3	8.4	5.3	8.8	5.2
	39.0	6.2	4.6	6.8	4.9	7.3	5.2	7.5	5.2	7.8	5.2	8.2	5.1	8.6	5.0
030	10.0	7.4	5.3	8.2	5.7	8.7	6.0	9.0	6.0	9.3	6.0	9.8	5.9	10.3	5.8
	12.0	7.4	5.3	8.2	5.7	8.7	6.0	9.0	6.0	9.3	6.0	9.8	5.9	10.3	5.8
	14.0	7.4	5.3	8.2	5.7	8.7	6.0	9.0	6.0	9.3	6.0	9.8	5.9	10.3	5.8
	16.0	7.4	5.3	8.2	5.7	8.7	6.0	9.0	6.0	9.3	6.0	9.8	5.9	10.3	5.8
	18.0	7.4	5.3	8.2	5.7	8.7	6.0	9.0	6.0	9.3	6.0	9.8	5.9	10.3	5.8
	20.0	7.4	5.3	8.2	5.7	8.7	6.0	9.0	6.0	9.3	6.0	9.8	5.9	10.3	5.8
	21.0	7.4	5.3	8.2	5.7	8.7	6.0	9.0	6.0	9.3	6.0	9.8	5.9	10.3	5.8
	23.0	7.4	5.3	8.2	5.7	8.7	6.0	9.0	6.0	9.3	6.0	9.8	5.9	10.3	5.8
	25.0	7.4	5.3	8.2	5.7	8.7	6.0	9.0	6.0	9.3	6.0	9.8	5.9	10.3	5.8
	27.0	7.4	5.3	8.2	5.7	8.7	6.0	9.0	6.0	9.3	6.0	9.8	5.9	10.3	5.8
	29.0	7.4	5.3	8.2	5.7	8.7	6.0	9.0	6.0	9.3	6.0	9.8	5.9	10.3	5.8
	31.0	7.4	5.3	8.2	5.7	8.7	6.0	9.0	6.0	9.3	6.0	9.8	5.9	10.3	5.8
	33.0	7.4	5.3	8.2	5.7	8.7	6.0	9.0	6.0	9.3	6.0	9.8	5.9	10.3	5.8
	35.0	7.4	5.3	8.2	5.7	8.7	6.0	9.0	6.0	9.3	6.0	9.8	5.9	10.3	5.8
	37.0	7.2	5.1	7.9	5.5	8.5	5.8	8.7	5.8	9.0	5.8	9.5	5.8	9.9	5.6
	39.0	7.0	5.0	7.7	5.3	8.2	5.7	8.5	5.6	8.7	5.6	9.2	5.6	9.7	5.5

2-way Air Discharge Cassette Type (MMU-AP**WH)** TC : Total capacity [kW] SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
048	10.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	12.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	14.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	16.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	18.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	20.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	21.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	23.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	25.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	27.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	29.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	31.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	33.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	35.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	37.0	11.1	8.2	12.3	8.7	13.1	9.2	13.6	9.2	14.0	9.2	14.8	9.1	15.4	8.9
	39.0	10.8	7.9	12.0	8.4	12.8	9.0	13.2	8.9	13.6	8.9	14.4	8.9	15.0	8.7

1-way Air Discharge Cassette Type (MMU-AP****YH [007~ 012] , -AP****SH [015~ 024])

TC : Total capacity [kW] SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
007	10.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	12.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	14.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	16.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	18.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	20.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	21.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	23.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	25.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	27.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	29.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	31.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	33.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	35.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
009	37.0	1.7	1.5	1.9	1.6	2.1	1.7	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7
	39.0	1.7	1.5	1.9	1.6	2.0	1.7	2.1	1.7	2.1	1.7	2.3	1.7	2.4	1.6
	10.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	12.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	14.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	16.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	18.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	20.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	21.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	23.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	25.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	27.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	29.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	31.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
012	33.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	35.0	2.3	2.0	2.5	2.1	2.7	2.2	2.8	2.2	2.9	2.2	3.1	2.2	3.2	2.1
	37.0	2.2	1.9	2.5	2.0	2.6	2.1	2.7	2.1	2.8	2.1	3.0	2.1	3.1	2.1
	39.0	2.2	1.8	2.4	2.0	2.6	2.1	2.6	2.1	2.7	2.1	2.9	2.1	3.0	2.0
	10.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	12.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	14.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	16.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	18.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	20.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	21.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	23.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	25.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	27.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
015	29.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	31.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	33.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	35.0	3.0	2.4	3.3	2.5	3.5	2.7	3.6	2.7	3.7	2.7	3.9	2.7	4.1	2.6
	37.0	2.9	2.3	3.2	2.5	3.4	2.6	3.5	2.6	3.6	2.6	3.8	2.6	4.0	2.5
	39.0	2.8	2.3	3.1	2.4	3.3	2.5	3.4	2.5	3.5	2.5	3.7	2.5	3.9	2.5
	10.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	12.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	14.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	16.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	18.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	20.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	21.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	23.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	25.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	27.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	29.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	31.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	33.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	35.0	3.7	2.7	4.1	2.9	4.4	3.1	4.5	3.1	4.6	3.1	4.9	3.0	5.1	3.0
	37.0	3.6	2.6	4.0	2.8	4.2	3.0	4.4	3.0	4.5	3.0	4.7	2.9	5.0	2.9
	39.0	3.5	2.5	3.8	2.7	4.1	2.9	4.2	2.9	4.4	2.9	4.6	2.8	4.8	2.8

1-way Air Discharge Cassette Type (MMU-AP****YH [007~ 012] , -AP****SH [015~ 024])

TC : Total capacity [kW] SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
018	10.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	12.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	14.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	16.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	18.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	20.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	21.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	23.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	25.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	27.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	29.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	31.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	33.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
	35.0	4.6	3.4	5.1	3.6	5.4	3.8	5.6	3.8	5.8	3.8	6.1	3.8	6.4	3.7
024	37.0	4.5	3.3	4.9	3.5	5.3	3.7	5.4	3.7	5.6	3.7	5.9	3.6	6.2	3.6
	39.0	4.3	3.2	4.8	3.4	5.1	3.6	5.3	3.6	5.4	3.6	5.7	3.5	6.0	3.5
	10.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	12.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	14.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	16.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	18.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	20.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	21.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	23.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	25.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	27.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	29.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	31.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	33.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	35.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	37.0	5.6	4.3	6.2	4.6	6.7	4.9	6.9	4.8	7.1	4.8	7.5	4.8	7.8	4.7
	39.0	5.5	4.2	6.1	4.4	6.5	4.7	6.7	4.7	6.9	4.7	7.3	4.7	7.6	4.6

Concealed Duct Standard Type (MMD-AP****BH)

TC : Total capacity [kW]

SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
007	10.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	12.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	14.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	16.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	18.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	20.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	21.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	23.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	25.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	27.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	29.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	31.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	33.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	35.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
009	37.0	1.7	1.5	1.9	1.6	2.1	1.7	2.1	1.6	2.2	1.6	2.3	1.6	2.4	1.6
	39.0	1.7	1.4	1.9	1.5	2.0	1.6	2.1	1.6	2.1	1.6	2.3	1.6	2.4	1.5
	10.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	12.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	14.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	16.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	18.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	20.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	21.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	23.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	25.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	27.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	29.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	31.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	33.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
012	35.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	37.0	2.2	1.8	2.5	1.9	2.6	2.0	2.7	2.0	2.8	2.0	3.0	2.0	3.1	2.0
	39.0	2.2	1.8	2.4	1.9	2.6	2.0	2.6	2.0	2.7	2.0	2.9	2.0	3.0	1.9
	10.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	12.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	14.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	16.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	18.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	20.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	21.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	23.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	25.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	27.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	29.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	31.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
015	33.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	35.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	37.0	2.9	2.1	3.2	2.3	3.4	2.4	3.5	2.4	3.6	2.4	3.8	2.4	4.0	2.3
	39.0	2.8	2.1	3.1	2.2	3.3	2.4	3.4	2.4	3.5	2.4	3.7	2.3	3.9	2.3
	10.0	3.7	2.7	4.1	2.8	4.4	3.0	4.5	3.0	4.6	3.0	4.9	3.0	5.1	2.9
	12.0	3.7	2.7	4.1	2.8	4.4	3.0	4.5	3.0	4.6	3.0	4.9	3.0	5.1	2.9
	14.0	3.7	2.7	4.1	2.8	4.4	3.0	4.5	3.0	4.6	3.0	4.9	3.0	5.1	2.9
	16.0	3.7	2.7	4.1	2.8	4.4	3.0	4.5	3.0	4.6	3.0	4.9	3.0	5.1	2.9
	18.0	3.7	2.7	4.1	2.8	4.4	3.0	4.5	3.0	4.6	3.0	4.9	3.0	5.1	2.9
	20.0	3.7	2.7	4.1	2.8	4.4	3.0	4.5	3.0	4.6	3.0	4.9	3.0	5.1	2.9
	21.0	3.7	2.7	4.1	2.8	4.4	3.0	4.5	3.0	4.6	3.0	4.9	3.0	5.1	2.9
	23.0	3.7	2.7	4.1	2.8	4.4	3.0	4.5	3.0	4.6	3.0	4.9	3.0	5.1	2.9
	25.0	3.7	2.7	4.1	2.8	4.4	3.0	4.5	3.0	4.6	3.0	4.9	3.0	5.1	2.9
	27.0	3.7	2.7	4.1	2.8	4.4	3.0	4.5	3.0	4.6	3.0	4.9	3.0	5.1	2.9
	29.0	3.7	2.7	4.1	2.8	4.4	3.0	4.5	3.0	4.6	3.0	4.9	3.0	5.1	2.9
	31.0	3.7	2.7	4.1	2.8	4.4	3.0	4.5	3.0	4.6	3.0	4.9	3.0	5.1	2.9
	33.0	3.7	2.7	4.1	2.8	4.4	3.0	4.5	3.0	4.6	3.0	4.9	3.0	5.1	2.9
	35.0	3.7	2.7	4.1	2.8	4.4	3.0	4.5	3.0	4.6	3.0	4.9	3.0	5.1	2.9
	37.0	3.6	2.6	4.0	2.7	4.2	2.9	4.4	2.9	4.5	2.9	4.7	2.9	5.0	2.8
	39.0	3.5	2.5	3.8	2.7	4.1	2.8	4.2	2.8	4.4	2.8	4.6	2.8	4.8	2.7

Concealed Duct Standard Type (MMD-AP***BH)

TC : Total capacity [kW]

SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
018	10.0	4.6	3.3	5.1	3.5	5.4	3.7	5.6	3.7	5.8	3.7	6.1	3.7	6.4	3.6
	12.0	4.6	3.3	5.1	3.5	5.4	3.7	5.6	3.7	5.8	3.7	6.1	3.7	6.4	3.6
	14.0	4.6	3.3	5.1	3.5	5.4	3.7	5.6	3.7	5.8	3.7	6.1	3.7	6.4	3.6
	16.0	4.6	3.3	5.1	3.5	5.4	3.7	5.6	3.7	5.8	3.7	6.1	3.7	6.4	3.6
	18.0	4.6	3.3	5.1	3.5	5.4	3.7	5.6	3.7	5.8	3.7	6.1	3.7	6.4	3.6
	20.0	4.6	3.3	5.1	3.5	5.4	3.7	5.6	3.7	5.8	3.7	6.1	3.7	6.4	3.6
	21.0	4.6	3.3	5.1	3.5	5.4	3.7	5.6	3.7	5.8	3.7	6.1	3.7	6.4	3.6
	23.0	4.6	3.3	5.1	3.5	5.4	3.7	5.6	3.7	5.8	3.7	6.1	3.7	6.4	3.6
	25.0	4.6	3.3	5.1	3.5	5.4	3.7	5.6	3.7	5.8	3.7	6.1	3.7	6.4	3.6
	27.0	4.6	3.3	5.1	3.5	5.4	3.7	5.6	3.7	5.8	3.7	6.1	3.7	6.4	3.6
	29.0	4.6	3.3	5.1	3.5	5.4	3.7	5.6	3.7	5.8	3.7	6.1	3.7	6.4	3.6
	31.0	4.6	3.3	5.1	3.5	5.4	3.7	5.6	3.7	5.8	3.7	6.1	3.7	6.4	3.6
	33.0	4.6	3.3	5.1	3.5	5.4	3.7	5.6	3.7	5.8	3.7	6.1	3.7	6.4	3.6
	35.0	4.6	3.3	5.1	3.5	5.4	3.7	5.6	3.7	5.8	3.7	6.1	3.7	6.4	3.6
	37.0	4.5	3.2	4.9	3.4	5.3	3.6	5.4	3.6	5.6	3.6	5.9	3.5	6.2	3.5
	39.0	4.3	3.1	4.8	3.3	5.1	3.5	5.3	3.5	5.4	3.5	5.7	3.4	6.0	3.4
024	10.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	12.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	14.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	16.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	18.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	20.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	21.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	23.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	25.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	27.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	29.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	31.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	33.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	35.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	37.0	5.6	4.3	6.2	4.6	6.7	4.9	6.9	4.8	7.1	4.8	7.5	4.8	7.8	4.7
	39.0	5.5	4.2	6.1	4.4	6.5	4.7	6.7	4.7	6.9	4.7	7.3	4.7	7.6	4.6
027	10.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	12.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	14.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	16.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	18.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	20.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	21.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	23.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	25.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	27.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	29.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	31.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	33.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	35.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	37.0	6.4	4.8	7.0	5.1	7.5	5.4	7.7	5.4	8.0	5.4	8.4	5.4	8.8	5.2
	39.0	6.2	4.7	6.8	5.0	7.3	5.3	7.5	5.3	7.8	5.3	8.2	5.2	8.6	5.1
030	10.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	12.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	14.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	16.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	18.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	20.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	21.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	23.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	25.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	27.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	29.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	31.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	33.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	35.0	7.4	5.5	8.2	5.9	8.7	6.2	9.0	6.2	9.3	6.2	9.8	6.1	10.3	6.0
	37.0	7.2	5.3	7.9	5.7	8.5	6.0	8.7	6.0	9.0	6.0	9.5	5.9	9.9	5.8
	39.0	7.0	5.2	7.7	5.5	8.2	5.9	8.5	5.8	8.7	5.8	9.2	5.8	9.7	5.6

Concealed Duct Standard Type (MMD-AP***BH)

TC : Total capacity [kW]

SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
036	10.0	9.2	6.5	10.2	6.9	10.9	7.3	11.2	7.3	11.5	7.3	12.2	7.2	12.8	7.1
	12.0	9.2	6.5	10.2	6.9	10.9	7.3	11.2	7.3	11.5	7.3	12.2	7.2	12.8	7.1
	14.0	9.2	6.5	10.2	6.9	10.9	7.3	11.2	7.3	11.5	7.3	12.2	7.2	12.8	7.1
	16.0	9.2	6.5	10.2	6.9	10.9	7.3	11.2	7.3	11.5	7.3	12.2	7.2	12.8	7.1
	18.0	9.2	6.5	10.2	6.9	10.9	7.3	11.2	7.3	11.5	7.3	12.2	7.2	12.8	7.1
	20.0	9.2	6.5	10.2	6.9	10.9	7.3	11.2	7.3	11.5	7.3	12.2	7.2	12.8	7.1
	21.0	9.2	6.5	10.2	6.9	10.9	7.3	11.2	7.3	11.5	7.3	12.2	7.2	12.8	7.1
	23.0	9.2	6.5	10.2	6.9	10.9	7.3	11.2	7.3	11.5	7.3	12.2	7.2	12.8	7.1
	25.0	9.2	6.5	10.2	6.9	10.9	7.3	11.2	7.3	11.5	7.3	12.2	7.2	12.8	7.1
	27.0	9.2	6.5	10.2	6.9	10.9	7.3	11.2	7.3	11.5	7.3	12.2	7.2	12.8	7.1
	29.0	9.2	6.5	10.2	6.9	10.9	7.3	11.2	7.3	11.5	7.3	12.2	7.2	12.8	7.1
	31.0	9.2	6.5	10.2	6.9	10.9	7.3	11.2	7.3	11.5	7.3	12.2	7.2	12.8	7.1
	33.0	9.2	6.5	10.2	6.9	10.9	7.3	11.2	7.3	11.5	7.3	12.2	7.2	12.8	7.1
	35.0	9.2	6.5	10.2	6.9	10.9	7.3	11.2	7.3	11.5	7.3	12.2	7.2	12.8	7.1
048	37.0	8.9	6.3	9.8	6.7	10.5	7.1	10.8	7.1	11.2	7.1	11.8	7.0	12.4	6.8
	39.0	8.7	6.1	9.6	6.5	10.2	6.9	10.5	6.9	10.9	6.9	11.5	6.8	12.0	6.6
	10.0	11.5	8.2	12.7	8.7	13.6	9.2	14.0	9.2	14.4	9.2	15.3	9.1	16.0	8.9
	12.0	11.5	8.2	12.7	8.7	13.6	9.2	14.0	9.2	14.4	9.2	15.3	9.1	16.0	8.9
	14.0	11.5	8.2	12.7	8.7	13.6	9.2	14.0	9.2	14.4	9.2	15.3	9.1	16.0	8.9
	16.0	11.5	8.2	12.7	8.7	13.6	9.2	14.0	9.2	14.4	9.2	15.3	9.1	16.0	8.9
	18.0	11.5	8.2	12.7	8.7	13.6	9.2	14.0	9.2	14.4	9.2	15.3	9.1	16.0	8.9
	20.0	11.5	8.2	12.7	8.7	13.6	9.2	14.0	9.2	14.4	9.2	15.3	9.1	16.0	8.9
	21.0	11.5	8.2	12.7	8.7	13.6	9.2	14.0	9.2	14.4	9.2	15.3	9.1	16.0	8.9
	23.0	11.5	8.2	12.7	8.7	13.6	9.2	14.0	9.2	14.4	9.2	15.3	9.1	16.0	8.9
	25.0	11.5	8.2	12.7	8.7	13.6	9.2	14.0	9.2	14.4	9.2	15.3	9.1	16.0	8.9
	27.0	11.5	8.2	12.7	8.7	13.6	9.2	14.0	9.2	14.4	9.2	15.3	9.1	16.0	8.9
	29.0	11.5	8.2	12.7	8.7	13.6	9.2	14.0	9.2	14.4	9.2	15.3	9.1	16.0	8.9
	31.0	11.5	8.2	12.7	8.7	13.6	9.2	14.0	9.2	14.4	9.2	15.3	9.1	16.0	8.9
056	33.0	11.5	8.2	12.7	8.7	13.6	9.2	14.0	9.2	14.4	9.2	15.3	9.1	16.0	8.9
	35.0	11.5	8.2	12.7	8.7	13.6	9.2	14.0	9.2	14.4	9.2	15.3	9.1	16.0	8.9
	37.0	11.1	7.9	12.3	8.4	13.1	8.9	13.6	8.9	14.0	8.9	14.8	8.8	15.4	8.6
	39.0	10.8	7.7	12.0	8.2	12.8	8.7	13.2	8.7	13.6	8.7	14.4	8.6	15.0	8.4
	10.0	13.1	9.6	14.5	10.2	15.5	10.8	16.0	10.8	16.5	10.8	17.4	10.7	18.2	10.5
	12.0	13.1	9.6	14.5	10.2	15.5	10.8	16.0	10.8	16.5	10.8	17.4	10.7	18.2	10.5
	14.0	13.1	9.6	14.5	10.2	15.5	10.8	16.0	10.8	16.5	10.8	17.4	10.7	18.2	10.5
	16.0	13.1	9.6	14.5	10.2	15.5	10.8	16.0	10.8	16.5	10.8	17.4	10.7	18.2	10.5
	18.0	13.1	9.6	14.5	10.2	15.5	10.8	16.0	10.8	16.5	10.8	17.4	10.7	18.2	10.5
	20.0	13.1	9.6	14.5	10.2	15.5	10.8	16.0	10.8	16.5	10.8	17.4	10.7	18.2	10.5
	21.0	13.1	9.6	14.5	10.2	15.5	10.8	16.0	10.8	16.5	10.8	17.4	10.7	18.2	10.5
	23.0	13.1	9.6	14.5	10.2	15.5	10.8	16.0	10.8	16.5	10.8	17.4	10.7	18.2	10.5
	25.0	13.1	9.6	14.5	10.2	15.5	10.8	16.0	10.8	16.5	10.8	17.4	10.7	18.2	10.5
	27.0	13.1	9.6	14.5	10.2	15.5	10.8	16.0	10.8	16.5	10.8	17.4	10.7	18.2	10.5
	29.0	13.1	9.6	14.5	10.2	15.5	10.8	16.0	10.8	16.5	10.8	17.4	10.7	18.2	10.5
	31.0	13.1	9.6	14.5	10.2	15.5	10.8	16.0	10.8	16.5	10.8	17.4	10.7	18.2	10.5
	33.0	13.1	9.6	14.5	10.2	15.5	10.8	16.0	10.8	16.5	10.8	17.4	10.7	18.2	10.5
	35.0	13.1	9.6	14.5	10.2	15.5	10.8	16.0	10.8	16.5	10.8	17.4	10.7	18.2	10.5
	37.0	12.7	9.3	14.1	9.9	15.0	10.5	15.5	10.5	16.0	10.5	16.9	10.4	17.7	10.1
	39.0	12.4	9.0	13.7	9.6	14.6	10.2	15.1	10.2	15.5	10.2	16.4	10.1	17.2	9.8

Concealed Duct High Static Pressure Type (MMD-AP****H)

TC : Total capacity [kW] SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
018	10.0	4.6	3.6	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	12.0	4.6	3.6	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	14.0	4.6	3.6	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	16.0	4.6	3.6	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	18.0	4.6	3.6	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	20.0	4.6	3.6	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	21.0	4.6	3.6	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	23.0	4.6	3.6	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	25.0	4.6	3.6	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	27.0	4.6	3.6	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	29.0	4.6	3.6	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	31.0	4.6	3.6	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	33.0	4.6	3.6	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	35.0	4.6	3.6	5.1	3.8	5.4	4.0	5.6	4.0	5.8	4.0	6.1	4.0	6.4	3.9
	37.0	4.5	3.5	4.9	3.7	5.3	3.9	5.4	3.9	5.6	3.9	5.9	3.9	6.2	3.8
	39.0	4.3	3.4	4.8	3.6	5.1	3.8	5.3	3.8	5.4	3.8	5.7	3.8	6.0	3.7
024	10.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	12.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	14.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	16.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	18.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	20.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	21.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	23.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	25.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	27.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	29.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	31.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	33.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	35.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	37.0	5.6	4.3	6.2	4.6	6.7	4.9	6.9	4.8	7.1	4.8	7.5	4.8	7.8	4.7
	39.0	5.5	4.2	6.1	4.4	6.5	4.7	6.7	4.7	6.9	4.7	7.3	4.7	7.6	4.6
027	10.0	6.6	4.8	7.3	5.1	7.8	5.4	8.0	5.4	8.2	5.4	8.7	5.3	9.1	5.2
	12.0	6.6	4.8	7.3	5.1	7.8	5.4	8.0	5.4	8.2	5.4	8.7	5.3	9.1	5.2
	14.0	6.6	4.8	7.3	5.1	7.8	5.4	8.0	5.4	8.2	5.4	8.7	5.3	9.1	5.2
	16.0	6.6	4.8	7.3	5.1	7.8	5.4	8.0	5.4	8.2	5.4	8.7	5.3	9.1	5.2
	18.0	6.6	4.8	7.3	5.1	7.8	5.4	8.0	5.4	8.2	5.4	8.7	5.3	9.1	5.2
	20.0	6.6	4.8	7.3	5.1	7.8	5.4	8.0	5.4	8.2	5.4	8.7	5.3	9.1	5.2
	21.0	6.6	4.8	7.3	5.1	7.8	5.4	8.0	5.4	8.2	5.4	8.7	5.3	9.1	5.2
	23.0	6.6	4.8	7.3	5.1	7.8	5.4	8.0	5.4	8.2	5.4	8.7	5.3	9.1	5.2
	25.0	6.6	4.8	7.3	5.1	7.8	5.4	8.0	5.4	8.2	5.4	8.7	5.3	9.1	5.2
	27.0	6.6	4.8	7.3	5.1	7.8	5.4	8.0	5.4	8.2	5.4	8.7	5.3	9.1	5.2
	29.0	6.6	4.8	7.3	5.1	7.8	5.4	8.0	5.4	8.2	5.4	8.7	5.3	9.1	5.2
	31.0	6.6	4.8	7.3	5.1	7.8	5.4	8.0	5.4	8.2	5.4	8.7	5.3	9.1	5.2
	33.0	6.6	4.8	7.3	5.1	7.8	5.4	8.0	5.4	8.2	5.4	8.7	5.3	9.1	5.2
	35.0	6.6	4.8	7.3	5.1	7.8	5.4	8.0	5.4	8.2	5.4	8.7	5.3	9.1	5.2
	37.0	6.4	4.6	7.0	4.9	7.5	5.2	7.7	5.2	8.0	5.2	8.4	5.2	8.8	5.1
	39.0	6.2	4.5	6.8	4.8	7.3	5.1	7.5	5.1	7.8	5.1	8.2	5.0	8.6	4.9
036	10.0	9.2	6.9	10.2	7.4	10.9	7.8	11.2	7.8	11.5	7.8	12.2	7.7	12.8	7.5
	12.0	9.2	6.9	10.2	7.4	10.9	7.8	11.2	7.8	11.5	7.8	12.2	7.7	12.8	7.5
	14.0	9.2	6.9	10.2	7.4	10.9	7.8	11.2	7.8	11.5	7.8	12.2	7.7	12.8	7.5
	16.0	9.2	6.9	10.2	7.4	10.9	7.8	11.2	7.8	11.5	7.8	12.2	7.7	12.8	7.5
	18.0	9.2	6.9	10.2	7.4	10.9	7.8	11.2	7.8	11.5	7.8	12.2	7.7	12.8	7.5
	20.0	9.2	6.9	10.2	7.4	10.9	7.8	11.2	7.8	11.5	7.8	12.2	7.7	12.8	7.5
	21.0	9.2	6.9	10.2	7.4	10.9	7.8	11.2	7.8	11.5	7.8	12.2	7.7	12.8	7.5
	23.0	9.2	6.9	10.2	7.4	10.9	7.8	11.2	7.8	11.5	7.8	12.2	7.7	12.8	7.5
	25.0	9.2	6.9	10.2	7.4	10.9	7.8	11.2	7.8	11.5	7.8	12.2	7.7	12.8	7.5
	27.0	9.2	6.9	10.2	7.4	10.9	7.8	11.2	7.8	11.5	7.8	12.2	7.7	12.8	7.5
	29.0	9.2	6.9	10.2	7.4	10.9	7.8	11.2	7.8	11.5	7.8	12.2	7.7	12.8	7.5
	31.0	9.2	6.9	10.2	7.4	10.9	7.8	11.2	7.8	11.5	7.8	12.2	7.7	12.8	7.5
	33.0	9.2	6.9	10.2	7.4	10.9	7.8	11.2	7.8	11.5	7.8	12.2	7.7	12.8	7.5
	35.0	9.2	6.9	10.2	7.4	10.9	7.8	11.2	7.8	11.5	7.8	12.2	7.7	12.8	7.5
	37.0	8.9	6.7	9.8	7.1	10.5	7.6	10.8	7.6	11.2	7.5	11.8	7.5	12.4	7.3
	39.0	8.7	6.5	9.6	6.9	10.2	7.4	10.5	7.3	10.9	7.3	11.5	7.3	12.0	7.1

Concealed Duct High Static Pressure Type (MMD-AP****H)

TC : Total capacity [kW] SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
048	10.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	12.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	14.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	16.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	18.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	20.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	21.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	23.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	25.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	27.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	29.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	31.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	33.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	35.0	11.5	8.4	12.7	9.0	13.6	9.5	14.0	9.5	14.4	9.5	15.3	9.4	16.0	9.2
	37.0	11.1	8.2	12.3	8.7	13.1	9.2	13.6	9.2	14.0	9.2	14.8	9.1	15.4	8.9
	39.0	10.8	7.9	12.0	8.4	12.8	9.0	13.2	8.9	13.6	8.9	14.4	8.9	15.0	8.7
072	10.0	18.4	13.2	20.3	14.1	21.7	14.9	22.4	14.9	23.1	14.9	24.4	14.8	25.5	14.4
	12.0	18.4	13.2	20.3	14.1	21.7	14.9	22.4	14.9	23.1	14.9	24.4	14.8	25.5	14.4
	14.0	18.4	13.2	20.3	14.1	21.7	14.9	22.4	14.9	23.1	14.9	24.4	14.8	25.5	14.4
	16.0	18.4	13.2	20.3	14.1	21.7	14.9	22.4	14.9	23.1	14.9	24.4	14.8	25.5	14.4
	18.0	18.4	13.2	20.3	14.1	21.7	14.9	22.4	14.9	23.1	14.9	24.4	14.8	25.5	14.4
	20.0	18.4	13.2	20.3	14.1	21.7	14.9	22.4	14.9	23.1	14.9	24.4	14.8	25.5	14.4
	21.0	18.4	13.2	20.3	14.1	21.7	14.9	22.4	14.9	23.1	14.9	24.4	14.8	25.5	14.4
	23.0	18.4	13.2	20.3	14.1	21.7	14.9	22.4	14.9	23.1	14.9	24.4	14.8	25.5	14.4
	25.0	18.4	13.2	20.3	14.1	21.7	14.9	22.4	14.9	23.1	14.9	24.4	14.8	25.5	14.4
	27.0	18.4	13.2	20.3	14.1	21.7	14.9	22.4	14.9	23.1	14.9	24.4	14.8	25.5	14.4
	29.0	18.4	13.2	20.3	14.1	21.7	14.9	22.4	14.9	23.1	14.9	24.4	14.8	25.5	14.4
	31.0	18.4	13.2	20.3	14.1	21.7	14.9	22.4	14.9	23.1	14.9	24.4	14.8	25.5	14.4
	33.0	18.4	13.2	20.3	14.1	21.7	14.9	22.4	14.9	23.1	14.9	24.4	14.8	25.5	14.4
	35.0	18.4	13.2	20.3	14.1	21.7	14.9	22.4	14.9	23.1	14.9	24.4	14.8	25.5	14.4
	37.0	17.8	12.8	19.7	13.6	21.0	14.5	21.7	14.4	22.3	14.4	23.6	14.3	24.7	14.0
	39.0	17.3	12.4	19.1	13.2	20.4	14.1	21.1	14.0	21.7	14.0	23.0	13.9	24.0	13.6
096	10.0	23.0	16.2	25.4	17.3	27.2	18.4	28.0	18.3	28.8	18.3	30.5	18.1	31.9	17.7
	12.0	23.0	16.2	25.4	17.3	27.2	18.4	28.0	18.3	28.8	18.3	30.5	18.1	31.9	17.7
	14.0	23.0	16.2	25.4	17.3	27.2	18.4	28.0	18.3	28.8	18.3	30.5	18.1	31.9	17.7
	16.0	23.0	16.2	25.4	17.3	27.2	18.4	28.0	18.3	28.8	18.3	30.5	18.1	31.9	17.7
	18.0	23.0	16.2	25.4	17.3	27.2	18.4	28.0	18.3	28.8	18.3	30.5	18.1	31.9	17.7
	20.0	23.0	16.2	25.4	17.3	27.2	18.4	28.0	18.3	28.8	18.3	30.5	18.1	31.9	17.7
	21.0	23.0	16.2	25.4	17.3	27.2	18.4	28.0	18.3	28.8	18.3	30.5	18.1	31.9	17.7
	23.0	23.0	16.2	25.4	17.3	27.2	18.4	28.0	18.3	28.8	18.3	30.5	18.1	31.9	17.7
	25.0	23.0	16.2	25.4	17.3	27.2	18.4	28.0	18.3	28.8	18.3	30.5	18.1	31.9	17.7
	27.0	23.0	16.2	25.4	17.3	27.2	18.4	28.0	18.3	28.8	18.3	30.5	18.1	31.9	17.7
	29.0	23.0	16.2	25.4	17.3	27.2	18.4	28.0	18.3	28.8	18.3	30.5	18.1	31.9	17.7
	31.0	23.0	16.2	25.4	17.3	27.2	18.4	28.0	18.3	28.8	18.3	30.5	18.1	31.9	17.7
	33.0	23.0	16.2	25.4	17.3	27.2	18.4	28.0	18.3	28.8	18.3	30.5	18.1	31.9	17.7
	35.0	23.0	16.2	25.4	17.3	27.2	18.4	28.0	18.3	28.8	18.3	30.5	18.1	31.9	17.7
	37.0	22.3	15.7	24.6	16.7	26.3	17.8	18.3	17.7	27.9	17.7	29.5	17.6	30.9	17.1
	39.0	21.6	15.3	23.9	16.3	25.6	17.3	26.3	17.2	27.1	17.2	28.7	17.1	30.0	16.7

Under Ceiling Type (MMC-AP****H)

TC : Total capacity [kW] SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
015	10.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	12.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	14.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	16.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	18.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	20.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	21.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	23.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	25.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	27.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	29.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	31.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	33.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	35.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	37.0	3.6	2.7	4.0	2.9	4.2	3.1	4.4	3.1	4.5	3.1	4.7	3.1	5.0	3.0
	39.0	3.5	2.7	3.8	2.8	4.1	3.0	4.2	3.0	4.4	3.0	4.6	3.0	4.8	2.9
018	10.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	12.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	14.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	16.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	18.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	20.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	21.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	23.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	25.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	27.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	29.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	31.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	33.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	35.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	37.0	4.5	3.3	4.9	3.6	5.3	3.8	5.4	3.8	5.6	3.8	5.9	3.7	6.2	3.7
	39.0	4.3	3.3	4.8	3.5	5.1	3.7	5.3	3.7	5.4	3.7	5.7	3.6	6.0	3.6
024	10.0	5.8	4.5	6.4	4.8	6.9	5.1	7.1	5.1	7.3	5.1	7.7	5.1	8.1	4.9
	12.0	5.8	4.5	6.4	4.8	6.9	5.1	7.1	5.1	7.3	5.1	7.7	5.1	8.1	4.9
	14.0	5.8	4.5	6.4	4.8	6.9	5.1	7.1	5.1	7.3	5.1	7.7	5.1	8.1	4.9
	16.0	5.8	4.5	6.4	4.8	6.9	5.1	7.1	5.1	7.3	5.1	7.7	5.1	8.1	4.9
	18.0	5.8	4.5	6.4	4.8	6.9	5.1	7.1	5.1	7.3	5.1	7.7	5.1	8.1	4.9
	20.0	5.8	4.5	6.4	4.8	6.9	5.1	7.1	5.1	7.3	5.1	7.7	5.1	8.1	4.9
	21.0	5.8	4.5	6.4	4.8	6.9	5.1	7.1	5.1	7.3	5.1	7.7	5.1	8.1	4.9
	23.0	5.8	4.5	6.4	4.8	6.9	5.1	7.1	5.1	7.3	5.1	7.7	5.1	8.1	4.9
	25.0	5.8	4.5	6.4	4.8	6.9	5.1	7.1	5.1	7.3	5.1	7.7	5.1	8.1	4.9
	27.0	5.8	4.5	6.4	4.8	6.9	5.1	7.1	5.1	7.3	5.1	7.7	5.1	8.1	4.9
	29.0	5.8	4.5	6.4	4.8	6.9	5.1	7.1	5.1	7.3	5.1	7.7	5.1	8.1	4.9
	31.0	5.8	4.5	6.4	4.8	6.9	5.1	7.1	5.1	7.3	5.1	7.7	5.1	8.1	4.9
	33.0	5.8	4.5	6.4	4.8	6.9	5.1	7.1	5.1	7.3	5.1	7.7	5.1	8.1	4.9
	35.0	5.8	4.5	6.4	4.8	6.9	5.1	7.1	5.1	7.3	5.1	7.7	5.1	8.1	4.9
	37.0	5.6	4.4	6.2	4.7	6.7	5.0	6.9	4.9	7.1	4.9	7.5	4.9	7.8	4.8
	39.0	5.5	4.3	6.1	4.5	6.5	4.8	6.7	4.8	6.9	4.8	7.3	4.8	7.6	4.6
027	10.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	12.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	14.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	16.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	18.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	20.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	21.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	23.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	25.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	27.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	29.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	31.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	33.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	35.0	6.6	5.0	7.3	5.3	7.8	5.6	8.0	5.6	8.2	5.6	8.7	5.5	9.1	5.4
	37.0	6.4	4.8	7.0	5.1	7.5	5.4	7.7	5.4	8.0	5.4	8.4	5.4	8.8	5.2
	39.0	6.2	4.7	6.8	5.0	7.3	5.3	7.5	5.3	7.8	5.3	8.2	5.2	8.6	5.1

Under Ceiling Type (MMC-AP****H)

TC : Total capacity [kW] SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
036	10.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	12.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	14.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	16.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	18.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	20.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	21.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	23.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	25.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	27.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	29.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	31.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	33.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
	35.0	9.2	6.7	10.2	7.2	10.9	7.6	11.2	7.6	11.5	7.6	12.2	7.5	12.8	7.4
048	37.0	8.9	6.5	9.8	6.9	10.5	7.4	10.8	7.4	11.2	7.4	11.8	7.3	12.4	7.1
	39.0	8.7	6.3	9.6	6.8	10.2	7.2	10.5	7.2	10.9	7.2	11.5	7.1	12.0	6.9
	10.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	12.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	14.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	16.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	18.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	20.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	21.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	23.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	25.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	27.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	29.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	31.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	33.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	35.0	11.5	8.7	12.7	9.3	13.6	9.8	14.0	9.8	14.4	9.8	15.3	9.7	16.0	9.5
	37.0	11.1	8.4	12.3	9.0	13.1	9.5	13.6	9.5	14.0	9.5	14.8	9.4	15.4	9.2
	39.0	10.8	8.2	12.0	8.7	12.8	9.2	13.2	9.2	13.6	9.2	14.4	9.1	15.0	8.9

High Wall Type (MMK-AP****H)

TC : Total capacity [kW] SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
007	10.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	12.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	14.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	16.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	18.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	20.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	21.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	23.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	25.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	27.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	29.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	31.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	33.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	35.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	37.0	1.7	1.5	1.9	1.6	2.1	1.7	2.1	1.6	2.2	1.6	2.3	1.6	2.4	1.6
	39.0	1.7	1.4	1.9	1.5	2.0	1.6	2.1	1.6	2.1	1.6	2.3	1.6	2.4	1.5
009	10.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	12.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	14.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	16.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	18.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	20.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	21.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	23.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	25.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	27.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	29.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	31.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	33.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	35.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	37.0	2.2	1.7	2.5	1.8	2.6	1.9	2.7	1.9	2.8	1.9	3.0	1.9	3.1	1.9
	39.0	2.2	1.7	2.4	1.8	2.6	1.9	2.6	1.9	2.7	1.9	2.9	1.9	3.0	1.8
012	10.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	12.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	14.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	16.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	18.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	20.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	21.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	23.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	25.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	27.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	29.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	31.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	33.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	35.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	37.0	2.9	2.1	3.2	2.3	3.4	2.4	3.5	2.4	3.6	2.4	3.8	2.4	4.0	2.3
	39.0	2.8	2.1	3.1	2.2	3.3	2.4	3.4	2.4	3.5	2.4	3.7	2.3	3.9	2.3
015	10.0	3.7	2.6	4.1	2.7	4.4	2.9	4.5	2.9	4.6	2.9	4.9	2.9	5.1	2.8
	12.0	3.7	2.6	4.1	2.7	4.4	2.9	4.5	2.9	4.6	2.9	4.9	2.9	5.1	2.8
	14.0	3.7	2.6	4.1	2.7	4.4	2.9	4.5	2.9	4.6	2.9	4.9	2.9	5.1	2.8
	16.0	3.7	2.6	4.1	2.7	4.4	2.9	4.5	2.9	4.6	2.9	4.9	2.9	5.1	2.8
	18.0	3.7	2.6	4.1	2.7	4.4	2.9	4.5	2.9	4.6	2.9	4.9	2.9	5.1	2.8
	20.0	3.7	2.6	4.1	2.7	4.4	2.9	4.5	2.9	4.6	2.9	4.9	2.9	5.1	2.8
	21.0	3.7	2.6	4.1	2.7	4.4	2.9	4.5	2.9	4.6	2.9	4.9	2.9	5.1	2.8
	23.0	3.7	2.6	4.1	2.7	4.4	2.9	4.5	2.9	4.6	2.9	4.9	2.9	5.1	2.8
	25.0	3.7	2.6	4.1	2.7	4.4	2.9	4.5	2.9	4.6	2.9	4.9	2.9	5.1	2.8
	27.0	3.7	2.6	4.1	2.7	4.4	2.9	4.5	2.9	4.6	2.9	4.9	2.9	5.1	2.8
	29.0	3.7	2.6	4.1	2.7	4.4	2.9	4.5	2.9	4.6	2.9	4.9	2.9	5.1	2.8
	31.0	3.7	2.6	4.1	2.7	4.4	2.9	4.5	2.9	4.6	2.9	4.9	2.9	5.1	2.8
	33.0	3.7	2.6	4.1	2.7	4.4	2.9	4.5	2.9	4.6	2.9	4.9	2.9	5.1	2.8
	35.0	3.7	2.6	4.1	2.7	4.4	2.9	4.5	2.9	4.6	2.9	4.9	2.9	5.1	2.8
	37.0	3.6	2.5	4.0	2.6	4.2	2.8	4.4	2.8	4.5	2.8	4.7	2.8	5.0	2.7
	39.0	3.5	2.4	3.8	2.6	4.1	2.7	4.2	2.7	4.4	2.7	4.6	2.7	4.8	2.6

High Wall Type (MMK-AP****H)

TC : Total capacity [kW] SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
018	10.0	4.6	3.2	5.1	3.4	5.4	3.6	5.6	3.6	5.8	3.6	6.1	3.6	6.4	3.5
	12.0	4.6	3.2	5.1	3.4	5.4	3.6	5.6	3.6	5.8	3.6	6.1	3.6	6.4	3.5
	14.0	4.6	3.2	5.1	3.4	5.4	3.6	5.6	3.6	5.8	3.6	6.1	3.6	6.4	3.5
	16.0	4.6	3.2	5.1	3.4	5.4	3.6	5.6	3.6	5.8	3.6	6.1	3.6	6.4	3.5
	18.0	4.6	3.2	5.1	3.4	5.4	3.6	5.6	3.6	5.8	3.6	6.1	3.6	6.4	3.5
	20.0	4.6	3.2	5.1	3.4	5.4	3.6	5.6	3.6	5.8	3.6	6.1	3.6	6.4	3.5
	21.0	4.6	3.2	5.1	3.4	5.4	3.6	5.6	3.6	5.8	3.6	6.1	3.6	6.4	3.5
	23.0	4.6	3.2	5.1	3.4	5.4	3.6	5.6	3.6	5.8	3.6	6.1	3.6	6.4	3.5
	25.0	4.6	3.2	5.1	3.4	5.4	3.6	5.6	3.6	5.8	3.6	6.1	3.6	6.4	3.5
	27.0	4.6	3.2	5.1	3.4	5.4	3.6	5.6	3.6	5.8	3.6	6.1	3.6	6.4	3.5
	29.0	4.6	3.2	5.1	3.4	5.4	3.6	5.6	3.6	5.8	3.6	6.1	3.6	6.4	3.5
	31.0	4.6	3.2	5.1	3.4	5.4	3.6	5.6	3.6	5.8	3.6	6.1	3.6	6.4	3.5
	33.0	4.6	3.2	5.1	3.4	5.4	3.6	5.6	3.6	5.8	3.6	6.1	3.6	6.4	3.5
	35.0	4.6	3.2	5.1	3.4	5.4	3.6	5.6	3.6	5.8	3.6	6.1	3.6	6.4	3.5
024	37.0	4.5	3.1	4.9	3.3	5.3	3.5	5.4	3.5	5.6	3.5	5.9	3.5	6.2	3.4
	39.0	4.3	3.0	4.8	3.2	5.1	3.4	5.3	3.4	5.4	3.4	5.7	3.4	6.0	3.3
	10.0	5.8	4.2	6.4	4.4	6.9	4.7	7.1	4.7	7.3	4.7	7.7	4.7	8.1	4.5
	12.0	5.8	4.2	6.4	4.4	6.9	4.7	7.1	4.7	7.3	4.7	7.7	4.7	8.1	4.5
	14.0	5.8	4.2	6.4	4.4	6.9	4.7	7.1	4.7	7.3	4.7	7.7	4.7	8.1	4.5
	16.0	5.8	4.2	6.4	4.4	6.9	4.7	7.1	4.7	7.3	4.7	7.7	4.7	8.1	4.5
	18.0	5.8	4.2	6.4	4.4	6.9	4.7	7.1	4.7	7.3	4.7	7.7	4.7	8.1	4.5
	20.0	5.8	4.2	6.4	4.4	6.9	4.7	7.1	4.7	7.3	4.7	7.7	4.7	8.1	4.5
	21.0	5.8	4.2	6.4	4.4	6.9	4.7	7.1	4.7	7.3	4.7	7.7	4.7	8.1	4.5
	23.0	5.8	4.2	6.4	4.4	6.9	4.7	7.1	4.7	7.3	4.7	7.7	4.7	8.1	4.5
	25.0	5.8	4.2	6.4	4.4	6.9	4.7	7.1	4.7	7.3	4.7	7.7	4.7	8.1	4.5
	27.0	5.8	4.2	6.4	4.4	6.9	4.7	7.1	4.7	7.3	4.7	7.7	4.7	8.1	4.5
	29.0	5.8	4.2	6.4	4.4	6.9	4.7	7.1	4.7	7.3	4.7	7.7	4.7	8.1	4.5
	31.0	5.8	4.2	6.4	4.4	6.9	4.7	7.1	4.7	7.3	4.7	7.7	4.7	8.1	4.5
	33.0	5.8	4.2	6.4	4.4	6.9	4.7	7.1	4.7	7.3	4.7	7.7	4.7	8.1	4.5
	35.0	5.8	4.2	6.4	4.4	6.9	4.7	7.1	4.7	7.3	4.7	7.7	4.7	8.1	4.5
	37.0	5.6	4.0	6.2	4.3	6.7	4.6	6.9	4.5	7.1	4.5	7.5	4.5	7.8	4.4
	39.0	5.5	3.9	6.1	4.2	6.5	4.4	6.7	4.4	6.9	4.4	7.3	4.4	7.6	4.3

Floor Standing Cabinet Type (MML-AP****H)

TC : Total capacity [kW]

SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
007	10.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	12.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	14.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	16.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	18.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	20.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	21.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	23.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	25.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	27.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	29.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	31.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	33.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	35.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	37.0	1.7	1.2	1.9	1.3	2.1	1.4	2.1	1.4	2.2	1.4	2.3	1.3	2.4	1.3
	39.0	1.7	1.2	1.9	1.2	2.0	1.3	2.1	1.3	2.1	1.3	2.3	1.3	2.4	1.3
009	10.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	12.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	14.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	16.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	18.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	20.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	21.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	23.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	25.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	27.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	29.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	31.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	33.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	35.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	37.0	2.2	1.4	2.5	1.5	2.6	1.6	2.7	1.5	2.8	1.5	3.0	1.5	3.1	1.5
	39.0	2.2	1.3	2.4	1.4	2.6	1.5	2.6	1.5	2.7	1.5	2.9	1.5	3.0	1.5
012	10.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	12.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	14.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	16.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	18.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	20.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	21.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	23.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	25.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	27.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	29.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	31.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	33.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	35.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	37.0	2.9	1.9	3.2	2.0	3.4	2.1	3.5	2.1	3.6	2.1	3.8	2.1	4.0	2.1
	39.0	2.8	1.8	3.1	2.0	3.3	2.1	3.4	2.1	3.5	2.1	3.7	2.1	3.9	2.0
015	10.0	3.5	2.3	3.8	2.5	4.1	2.6	4.4	2.7	4.3	2.6	4.6	2.6	4.8	2.6
	12.0	3.5	2.3	3.8	2.5	4.1	2.6	4.4	2.7	4.3	2.6	4.6	2.6	4.8	2.6
	14.0	3.5	2.3	3.8	2.5	4.1	2.6	4.4	2.7	4.3	2.6	4.6	2.6	4.8	2.6
	16.0	3.5	2.3	3.8	2.5	4.1	2.6	4.4	2.7	4.3	2.6	4.6	2.6	4.8	2.6
	18.0	3.5	2.3	3.8	2.5	4.1	2.6	4.4	2.7	4.3	2.6	4.6	2.6	4.8	2.6
	20.0	3.5	2.3	3.8	2.5	4.1	2.6	4.4	2.7	4.3	2.6	4.6	2.6	4.8	2.6
	21.0	3.5	2.3	3.8	2.5	4.1	2.6	4.4	2.7	4.3	2.6	4.6	2.6	4.8	2.6
	23.0	3.5	2.3	3.8	2.5	4.1	2.6	4.4	2.7	4.3	2.6	4.6	2.6	4.8	2.6
	25.0	3.5	2.3	3.8	2.5	4.1	2.6	4.4	2.7	4.3	2.6	4.6	2.6	4.8	2.6
	27.0	3.5	2.3	3.8	2.5	4.1	2.6	4.4	2.7	4.3	2.6	4.6	2.6	4.8	2.6
	29.0	3.5	2.3	3.8	2.5	4.1	2.6	4.4	2.7	4.3	2.6	4.6	2.6	4.8	2.6
	31.0	3.5	2.3	3.8	2.5	4.1	2.6	4.4	2.7	4.3	2.6	4.6	2.6	4.8	2.6
	33.0	3.5	2.3	3.8	2.5	4.1	2.6	4.4	2.7	4.3	2.6	4.6	2.6	4.8	2.6
	35.0	3.6	2.4	4.0	2.6	4.2	2.7	4.5	2.8	4.5	2.7	4.7	2.7	5.0	2.6
	37.0	3.5	2.3	3.8	2.5	4.1	2.6	4.4	2.7	4.3	2.6	4.6	2.6	4.8	2.6
	39.0	3.4	2.3	3.7	2.4	4.0	2.6	4.2	2.6	4.2	2.6	4.5	2.5	4.7	2.5

Floor Standing Cabinet Type (MML-AP****H)

TC : Total capacity [kW] SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
018	10.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	12.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	14.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	16.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	18.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	20.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	21.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	23.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	25.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	27.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	29.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	31.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	33.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	35.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
024	37.0	4.5	3.0	4.9	3.2	5.3	3.4	5.4	3.4	5.6	3.4	5.9	3.4	6.2	3.3
	39.0	4.3	2.9	4.8	3.1	5.1	3.3	5.3	3.3	5.4	3.3	5.7	3.3	6.0	3.2
	10.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	12.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	14.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	16.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	18.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	20.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	21.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	23.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	25.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	27.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	29.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	31.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	33.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	35.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	37.0	5.6	3.9	6.2	4.1	6.7	4.4	6.9	4.4	7.1	4.4	7.5	4.3	7.8	4.2
	39.0	5.5	3.8	6.1	4.0	6.5	4.2	6.7	4.2	6.9	4.2	7.3	4.2	7.6	4.1

Floor Standing Concealed Type (MML-AP****BH)

TC : Total capacity [kW]

SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
007	10.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	12.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	14.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	16.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	18.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	20.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	21.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	23.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	25.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	27.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	29.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	31.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	33.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	35.0	1.8	1.2	2.0	1.3	2.1	1.4	2.2	1.4	2.3	1.4	2.4	1.4	2.5	1.4
	37.0	1.7	1.2	1.9	1.3	2.1	1.4	2.1	1.4	2.2	1.4	2.3	1.3	2.4	1.3
	39.0	1.7	1.2	1.9	1.2	2.0	1.3	2.1	1.3	2.1	1.3	2.3	1.3	2.4	1.3
009	10.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	12.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	14.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	16.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	18.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	20.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	21.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	23.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	25.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	27.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	29.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	31.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	33.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	35.0	2.3	1.4	2.5	1.5	2.7	1.6	2.8	1.6	2.9	1.6	3.1	1.6	3.2	1.5
	37.0	2.2	1.4	2.5	1.5	2.6	1.6	2.7	1.5	2.8	1.5	3.0	1.5	3.1	1.5
	39.0	2.2	1.3	2.4	1.4	2.6	1.5	2.6	1.5	2.7	1.5	2.9	1.5	3.0	1.5
012	10.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	12.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	14.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	16.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	18.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	20.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	21.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	23.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	25.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	27.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	29.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	31.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	33.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	35.0	3.0	2.0	3.3	2.1	3.5	2.2	3.6	2.2	3.7	2.2	3.9	2.2	4.1	2.1
	37.0	2.9	1.9	3.2	2.0	3.4	2.1	3.5	2.1	3.6	2.1	3.8	2.1	4.0	2.1
	39.0	2.8	1.8	3.1	2.0	3.3	2.1	3.4	2.1	3.5	2.1	3.7	2.1	3.9	2.0
015	10.0	3.7	2.5	4.1	2.7	4.4	2.8	4.5	2.8	4.6	2.8	4.9	2.8	5.1	2.7
	12.0	3.7	2.5	4.1	2.7	4.4	2.8	4.5	2.8	4.6	2.8	4.9	2.8	5.1	2.7
	14.0	3.7	2.5	4.1	2.7	4.4	2.8	4.5	2.8	4.6	2.8	4.9	2.8	5.1	2.7
	16.0	3.7	2.5	4.1	2.7	4.4	2.8	4.5	2.8	4.6	2.8	4.9	2.8	5.1	2.7
	18.0	3.7	2.5	4.1	2.7	4.4	2.8	4.5	2.8	4.6	2.8	4.9	2.8	5.1	2.7
	20.0	3.7	2.5	4.1	2.7	4.4	2.8	4.5	2.8	4.6	2.8	4.9	2.8	5.1	2.7
	21.0	3.7	2.5	4.1	2.7	4.4	2.8	4.5	2.8	4.6	2.8	4.9	2.8	5.1	2.7
	23.0	3.7	2.5	4.1	2.7	4.4	2.8	4.5	2.8	4.6	2.8	4.9	2.8	5.1	2.7
	25.0	3.7	2.5	4.1	2.7	4.4	2.8	4.5	2.8	4.6	2.8	4.9	2.8	5.1	2.7
	27.0	3.7	2.5	4.1	2.7	4.4	2.8	4.5	2.8	4.6	2.8	4.9	2.8	5.1	2.7
	29.0	3.7	2.5	4.1	2.7	4.4	2.8	4.5	2.8	4.6	2.8	4.9	2.8	5.1	2.7
	31.0	3.7	2.5	4.1	2.7	4.4	2.8	4.5	2.8	4.6	2.8	4.9	2.8	5.1	2.7
	33.0	3.7	2.5	4.1	2.7	4.4	2.8	4.5	2.8	4.6	2.8	4.9	2.8	5.1	2.7
	35.0	3.7	2.5	4.1	2.7	4.4	2.8	4.5	2.8	4.6	2.8	4.9	2.8	5.1	2.7
	37.0	3.6	2.4	4.0	2.6	4.2	2.7	4.4	2.7	4.5	2.7	4.7	2.7	5.0	2.6
	39.0	3.5	2.3	3.8	2.5	4.1	2.7	4.2	2.6	4.4	2.6	4.6	2.6	4.8	2.6

Floor Standing Concealed Type (MML-AP****BH)

TC : Total capacity [kW]

SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
018	10.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	12.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	14.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	16.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	18.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	20.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	21.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	23.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	25.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	27.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	29.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	31.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	33.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
	35.0	4.6	3.1	5.1	3.3	5.4	3.5	5.6	3.5	5.8	3.5	6.1	3.5	6.4	3.4
024	37.0	4.5	3.0	4.9	3.2	5.3	3.4	5.4	3.4	5.6	3.4	5.9	3.4	6.2	3.3
	39.0	4.3	2.9	4.8	3.1	5.1	3.3	5.3	3.3	5.4	3.3	5.7	3.3	6.0	3.2
	10.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	12.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	14.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	16.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	18.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	20.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	21.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	23.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	25.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	27.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	29.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	31.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	33.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	35.0	5.8	4.0	6.4	4.2	6.9	4.5	7.1	4.5	7.3	4.5	7.7	4.5	8.1	4.4
	37.0	5.6	3.9	6.2	4.1	6.7	4.4	6.9	4.4	7.1	4.4	7.5	4.3	7.8	4.2
	39.0	5.5	3.8	6.1	4.0	6.5	4.2	6.7	4.2	6.9	4.2	7.3	4.2	7.6	4.1

Floor Standing Type (MMF-AP****H)

TC : Total capacity [kW] SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
015	10.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	12.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	14.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	16.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	18.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	20.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	21.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	23.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	25.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	27.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	29.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	31.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	33.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	35.0	3.7	3.0	4.1	3.2	4.4	3.4	4.5	3.4	4.6	3.4	4.9	3.4	5.1	3.3
	37.0	3.6	2.9	4.0	3.1	4.2	3.3	4.4	3.3	4.5	3.3	4.7	3.3	5.0	3.2
	39.0	3.5	2.8	3.8	3.0	4.1	3.2	4.2	3.2	4.4	3.2	4.6	3.2	4.8	3.1
018	10.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	12.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	14.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	16.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	18.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	20.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	21.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	23.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	25.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	27.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	29.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	31.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	33.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	35.0	4.6	3.6	5.1	3.9	5.4	4.1	5.6	4.1	5.8	4.1	6.1	4.1	6.4	4.0
	37.0	4.5	3.5	4.9	3.7	5.3	4.0	5.4	4.0	5.6	4.0	5.9	3.9	6.2	3.8
	39.0	4.3	3.4	4.8	3.6	5.1	3.9	5.3	3.9	5.4	3.9	5.7	3.8	6.0	3.7
024	10.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	12.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	14.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	16.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	18.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	20.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	21.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	23.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	25.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	27.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	29.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	31.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	33.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	35.0	5.8	4.7	6.4	5.0	6.9	5.3	7.1	5.3	7.3	5.3	7.7	5.3	8.1	5.1
	37.0	5.6	4.5	6.2	4.8	6.7	5.1	6.9	5.1	7.1	5.1	7.5	5.1	7.8	5.0
	39.0	5.5	4.4	6.1	4.7	6.5	5.0	6.7	5.0	6.9	5.0	7.3	4.9	7.6	4.8
027	10.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	12.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	14.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	16.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	18.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	20.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	21.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	23.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	25.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	27.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	29.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	31.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	33.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	35.0	6.6	5.2	7.3	5.6	7.8	5.9	8.0	5.9	8.2	5.9	8.7	5.8	9.1	5.7
	37.0	6.4	5.1	7.0	5.4	7.5	5.7	7.7	5.7	8.0	5.7	8.4	5.7	8.8	5.5
	39.0	6.2	4.9	6.8	5.2	7.3	5.6	7.5	5.6	7.8	5.6	8.2	5.5	8.6	5.4

Floor Standing Type (MMF-AP****H)

TC : Total capacity [kW] SHC : Sensible capacity [kW]

unit size	outdoor air temp. °CDB	indoor air temp.													
		14.0°CWB		16.0°CWB		18.0°CWB		19.0°CWB		20.0°CWB		22.0°CWB		24.0°CWB	
		20°CDB		23°CDB		26°CDB		27°CDB		28°CDB		30°CDB		32°CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
036	10.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	12.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	14.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	16.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	18.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	20.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	21.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	23.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	25.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	27.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	29.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	31.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	33.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	35.0	9.2	7.1	10.2	7.6	10.9	8.0	11.2	8.0	11.5	8.0	12.2	7.9	12.8	7.7
	37.0	8.9	6.9	9.8	7.3	10.5	7.8	10.8	7.7	11.2	7.7	11.8	7.7	12.4	7.5
	39.0	8.7	6.7	9.6	7.1	10.2	7.6	10.5	7.5	10.9	7.5	11.5	7.5	12.0	7.3
048	10.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	12.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	14.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	16.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	18.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	20.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	21.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	23.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	25.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	27.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	29.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	31.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	33.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	35.0	11.5	8.8	12.7	9.3	13.6	9.9	14.0	9.9	14.4	9.9	15.3	9.8	16.0	9.6
	37.0	11.1	8.5	12.3	9.0	13.1	9.6	13.6	9.6	14.0	9.6	14.8	9.5	15.4	9.3
	39.0	10.8	8.3	12.0	8.8	12.8	9.3	13.2	9.3	13.6	9.3	14.4	9.2	15.0	9.0
056	10.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	12.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	14.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	16.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	18.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	20.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	21.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	23.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	25.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	27.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	29.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	31.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	33.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	35.0	13.1	10.1	14.5	10.8	15.5	11.4	16.0	11.4	16.5	11.4	17.4	11.3	18.2	11.0
	37.0	12.7	9.8	14.1	10.4	15.0	11.1	15.5	11.0	16.0	11.0	16.9	10.9	17.7	10.7
	39.0	12.4	9.5	13.7	10.1	14.6	10.8	15.1	10.7	15.5	10.7	16.4	10.6	17.2	10.4



Part load performance

Part Load Performance

MMY-MAP0501* (5HP, 14kW system)

Cooling

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Cooling Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
40°C	13.0	3.86	3.16	2.54	2.02	1.59	1.24	1.03	0.88
35°C	14.0	3.65	2.98	2.40	1.90	1.49	1.16	0.96	0.82
30°C	14.0	3.02	2.48	2.00	1.60	1.27	1.00	0.84	0.73
25°C	14.0	2.71	2.22	1.80	1.45	1.15	0.92	0.78	0.68
20°C	14.0	2.52	2.07	1.68	1.35	1.08	0.87	0.74	0.65
15°C	14.0	2.34	1.93	1.57	1.26	1.01	0.82	0.70	0.61

Indoor air temperature conditions : 27.0°C dry-bulb / 19.0°C wet bulb

Heating

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Heating Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
15°C	16.0	3.35	2.80	2.32	1.90	1.53	1.23	0.99	0.80
11°C	16.0	3.61	3.01	2.48	2.01	1.61	1.28	1.01	0.81
7°C	16.0	3.84	3.19	2.62	2.12	1.69	1.32	1.03	0.81
1°C	14.9	3.90	3.24	2.65	2.14	1.69	1.32	1.02	0.80
-5°C	12.8	3.63	3.02	2.47	1.99	1.58	1.24	0.96	0.75
-10°C	10.9	3.26	2.72	2.23	1.81	1.44	1.14	0.89	0.71

Indoor air temperature conditions : 20.0°C dry-bulb

Part Load Performance

MMY-MAP0601* (6HP, 16kW system)

Cooling

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Cooling Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
40°C	14.9	4.91	4.01	3.23	2.57	2.02	1.58	1.26	1.05
35°C	16.0	4.64	3.79	3.05	2.42	1.90	1.48	1.17	0.97
30°C	16.0	3.84	3.15	2.55	2.03	1.61	1.28	1.03	0.87
25°C	16.0	3.44	2.83	2.29	1.84	1.46	1.17	0.95	0.82
20°C	16.0	3.20	2.63	2.14	1.72	1.37	1.10	0.90	0.78
15°C	16.0	2.97	2.45	1.99	1.61	1.29	1.04	0.86	0.74

Indoor air temperature conditions : 27.0°C dry-bulb / 19.0°C wet bulb

Heating

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Heating Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
15°C	18.0	3.97	3.33	2.76	2.25	1.82	1.46	1.17	0.96
11°C	18.0	4.28	3.57	2.94	2.39	1.92	1.52	1.20	0.96
7°C	18.0	4.56	3.79	3.11	2.52	2.00	1.57	1.23	0.97
1°C	16.7	4.64	3.85	3.15	2.54	2.01	1.57	1.22	0.95
-5°C	14.4	4.31	3.58	2.93	2.37	1.88	1.47	1.14	0.89
-10°C	12.2	3.87	3.23	2.65	2.15	1.71	1.35	1.06	0.84

Indoor air temperature conditions : 20.0°C dry-bulb

Part Load Performance

MMY-MAP0801* (8HP, 22.4kW system)

Cooling

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Cooling Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
40°C	20.8	6.00	4.91	3.95	3.14	2.47	1.93	1.54	1.28
35°C	22.4	5.67	4.63	3.73	2.96	2.32	1.81	1.43	1.19
30°C	22.4	4.69	3.85	3.11	2.49	1.97	1.56	1.26	1.07
25°C	22.4	4.20	3.45	2.80	2.25	1.79	1.43	1.16	1.00
20°C	22.4	3.91	3.21	2.61	2.10	1.68	1.35	1.10	0.95
15°C	22.4	3.63	2.99	2.44	1.96	1.57	1.27	1.05	0.91

Indoor air temperature conditions : 27.0°C dry-bulb / 19.0°C wet bulb

Heating

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Heating Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
15°C	25.0	5.12	4.29	3.55	2.91	2.35	1.89	1.51	1.23
11°C	25.0	5.52	4.61	3.79	3.08	2.47	1.96	1.55	1.24
7°C	25.0	5.88	4.89	4.01	3.24	2.58	2.03	1.58	1.25
1°C	23.3	5.98	4.97	4.06	3.27	2.59	2.02	1.57	1.22
-5°C	20.0	5.55	4.62	3.78	3.05	2.42	1.90	1.47	1.15
-10°C	17.0	5.00	4.16	3.42	2.77	2.21	1.74	1.37	1.08

Indoor air temperature conditions : 20.0°C dry-bulb

Part Load Performance

MMY-MAP1001* (10HP, 28kW system)

Cooling

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Cooling Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
40°C	26.0	8.13	6.65	5.35	4.25	3.34	2.62	2.08	1.73
35°C	28.0	7.68	6.27	5.05	4.00	3.14	2.45	1.94	1.61
30°C	28.0	6.36	5.21	4.22	3.37	2.67	2.11	1.71	1.45
25°C	28.0	5.69	4.68	3.79	3.04	2.42	1.93	1.58	1.35
20°C	28.0	5.29	4.35	3.54	2.84	2.27	1.82	1.50	1.29
15°C	28.0	4.92	4.05	3.30	2.66	2.13	1.72	1.42	1.23

Indoor air temperature conditions : 27.0°C dry-bulb / 19.0°C wet bulb

Heating

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Heating Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
15°C	31.5	6.94	5.82	4.82	3.94	3.18	2.56	2.05	1.67
11°C	31.5	7.49	6.25	5.14	4.18	3.35	2.65	2.10	1.68
7°C	31.5	7.97	6.63	5.44	4.40	3.50	2.75	2.15	1.69
1°C	29.3	8.10	6.73	5.51	4.44	3.52	2.74	2.12	1.66
-5°C	25.2	7.53	6.26	5.13	4.13	3.28	2.57	2.00	1.56
-10°C	21.4	6.77	5.64	4.63	3.75	2.99	2.36	1.85	1.47

Indoor air temperature conditions : 20.0°C dry-bulb

Part Load Performance

MMY-MAP1201* (12HP, 33.5kW system)

Cooling

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Cooling Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
40°C	31.2	12.61	9.39	7.47	5.82	4.44	3.32	2.48	1.92
35°C	33.5	11.92	8.87	7.05	5.49	4.18	3.12	2.33	1.79
30°C	33.5	9.87	7.33	5.85	4.57	3.51	2.65	2.01	1.58
25°C	33.5	8.84	6.56	5.24	4.11	3.17	2.41	1.85	1.47
20°C	33.5	8.22	6.10	4.88	3.83	2.96	2.26	1.74	1.40
15°C	33.5	7.64	5.66	4.54	3.57	2.76	2.12	1.64	1.33

Indoor air temperature conditions : 27.0°C dry-bulb / 19.0°C wet bulb

9

Heating

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Heating Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
15°C	37.5	8.88	7.53	6.26	5.14	4.06	3.15	2.42	1.87
11°C	37.5	9.57	8.12	6.73	5.50	4.31	3.31	2.51	1.90
7°C	37.5	10.19	8.66	7.16	5.82	4.54	3.46	2.59	1.93
1°C	34.9	10.36	8.81	7.27	5.90	4.58	3.48	2.58	1.91
-5°C	30.0	9.63	8.18	6.76	5.49	4.27	3.25	2.42	1.79
-10°C	25.5	8.66	7.35	6.08	4.96	3.87	2.96	2.23	1.67

Indoor air temperature conditions : 20.0°C dry-bulb

Part Load Performance

MMY-AP1601* (16HP, 45kW system)

Cooling

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Cooling Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
40°C	41.9	12.91	10.01	8.11	6.48	5.13	4.06	3.27	2.76
35°C	45.0	12.20	9.46	7.66	6.11	4.83	3.82	3.07	2.58
30°C	45.0	10.10	7.90	6.43	5.17	4.14	3.32	2.72	2.34
25°C	45.0	9.04	7.11	5.80	4.69	3.78	3.05	2.53	2.20
20°C	45.0	8.41	6.63	5.42	4.40	3.55	2.89	2.41	2.10
15°C	45.0	7.82	6.19	5.07	4.13	3.35	2.73	2.29	2.02

Indoor air temperature conditions : 27.0°C dry-bulb / 19.0°C wet bulb

Heating

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Heating Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
15°C	50.0	10.70	8.80	7.33	6.03	4.92	3.99	3.25	2.69
11°C	50.0	11.53	9.44	7.81	6.38	5.16	4.14	3.31	2.69
7°C	50.0	12.28	10.00	8.25	6.71	5.38	4.28	3.39	2.71
1°C	46.5	12.49	10.15	8.35	6.77	5.41	4.27	3.36	2.66
-5°C	40.0	11.60	9.45	7.78	6.32	5.06	4.01	3.17	2.53
-10°C	34.0	10.43	8.54	7.06	5.76	4.64	3.70	2.95	2.39

Indoor air temperature conditions : 20.0°C dry-bulb

Part Load Performance

MMY-AP2001* (20HP, 56kW system)

Cooling

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Cooling Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
40°C	52.1	17.11	13.49	10.91	8.70	6.88	5.43	4.36	3.67
35°C	56.0	16.17	12.75	10.30	8.21	6.48	5.10	4.09	3.43
30°C	56.0	13.38	10.62	8.63	6.93	5.53	4.42	3.61	3.09
25°C	56.0	11.99	9.56	7.79	6.28	5.04	4.07	3.35	2.90
20°C	56.0	10.82	8.66	7.08	5.74	4.63	3.76	3.13	2.73
15°C	56.0	10.06	8.08	6.62	5.37	4.35	3.55	2.97	2.61

Indoor air temperature conditions : 27.0°C dry-bulb / 19.0°C wet bulb

9

Heating

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Heating Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
15°C	63.0	14.34	11.86	9.85	8.10	6.59	5.33	4.32	3.56
11°C	63.0	15.46	12.71	10.51	8.57	6.91	5.53	4.41	3.57
7°C	63.0	16.46	13.48	11.10	9.01	7.22	5.72	4.51	3.60
1°C	58.6	16.74	13.68	11.24	9.09	7.25	5.71	4.47	3.53
-5°C	50.4	15.55	12.74	10.47	8.49	6.79	5.36	4.21	3.35
-10°C	42.8	13.98	11.50	9.49	7.72	6.21	4.94	3.93	3.16

Indoor air temperature conditions : 20.0°C dry-bulb

Part Load Performance

MMY-AP2601* (26HP, 73kW system)

Cooling

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Cooling Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
40°C	67.9	21.47	16.76	13.56	10.83	8.57	6.78	5.45	4.60
35°C	73.0	20.29	15.84	12.81	10.22	8.07	6.37	5.11	4.29
30°C	73.0	16.79	13.21	10.74	8.64	6.90	5.53	4.52	3.88
25°C	73.0	15.04	11.88	9.70	7.83	6.30	5.09	4.20	3.65
20°C	73.0	13.98	11.08	9.06	7.34	5.93	4.81	4.00	3.49
15°C	73.0	13.00	10.34	8.47	6.88	5.58	4.55	3.81	3.34

Indoor air temperature conditions : 27.0°C dry-bulb / 19.0°C wet bulb

Heating

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Heating Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
15°C	81.5	17.87	14.73	12.25	10.08	8.21	6.66	5.41	4.47
11°C	81.5	19.26	15.79	13.06	10.67	8.62	6.90	5.52	4.48
7°C	81.5	20.51	16.75	13.80	11.21	8.99	7.14	5.64	4.52
1°C	75.8	20.86	16.99	13.97	11.31	9.03	7.12	5.59	4.43
-5°C	65.2	19.37	15.82	13.02	10.57	8.46	6.69	5.27	4.20
-10°C	55.4	17.42	14.29	11.80	9.62	7.74	6.18	4.92	3.96

Indoor air temperature conditions : 20.0°C dry-bulb

Part Load Performance

MMY-AP3001* (30HP, 84kW system)

Cooling

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Cooling Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
40°C	78.1	25.67	20.24	16.36	13.06	10.32	8.15	6.54	5.50
35°C	84.0	24.26	19.12	15.45	12.31	9.72	7.65	6.13	5.14
30°C	84.0	20.08	15.94	12.95	10.40	8.30	6.64	5.42	4.64
25°C	84.0	17.98	14.33	11.68	9.43	7.57	6.10	5.03	4.35
20°C	84.0	16.72	13.36	10.91	8.83	7.12	5.77	4.79	4.17
15°C	84.0	15.55	12.46	10.20	8.27	6.69	5.45	4.55	3.99

Indoor air temperature conditions : 27.0°C dry-bulb / 19.0°C wet bulb

9

Heating

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Heating Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
15°C	95.0	21.63	17.78	14.78	12.14	9.88	8.00	6.48	5.34
11°C	95.0	23.31	19.07	15.76	12.86	10.37	8.29	6.62	5.36
7°C	95.0	24.82	20.22	16.65	13.52	10.83	8.58	6.77	5.40
1°C	88.4	25.24	20.52	16.85	13.64	10.88	8.56	6.70	5.30
-5°C	76.0	23.45	19.10	15.71	12.73	10.18	8.04	6.32	5.02
-10°C	64.6	21.09	17.25	14.23	11.59	9.31	7.41	5.89	4.73

Indoor air temperature conditions : 20.0°C dry-bulb

Part Load Performance

MMY-AP3411* (34HP, 96kW system)

Cooling

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Cooling Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
40°C	89.3	35.00	25.73	20.59	16.18	12.51	9.56	7.35	5.87
35°C	96.0	33.08	24.32	19.45	15.28	11.79	9.00	6.90	5.48
30°C	96.0	27.38	20.18	16.21	12.81	9.98	7.72	6.03	4.91
25°C	96.0	24.52	18.10	14.58	11.56	9.06	7.06	5.57	4.59
20°C	96.0	22.80	16.85	13.59	10.80	8.49	6.65	5.28	4.38
15°C	96.0	21.20	15.68	12.67	10.10	7.96	6.26	5.00	4.18

Indoor air temperature conditions : 27.0°C dry-bulb / 19.0°C wet bulb

Heating

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Heating Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
15°C	108.0	25.74	21.20	17.66	14.54	11.63	9.19	7.23	5.75
11°C	108.0	27.74	22.82	18.94	15.50	12.29	9.61	7.44	5.81
7°C	108.0	29.54	24.28	20.08	16.37	12.90	10.00	7.66	5.89
1°C	100.4	30.04	24.68	20.38	16.56	13.01	10.03	7.62	5.80
-5°C	86.4	27.90	22.95	18.97	15.44	12.15	9.39	7.17	5.48
-10°C	73.4	25.10	20.68	17.13	13.99	11.07	8.61	6.64	5.14

Indoor air temperature conditions : 20.0°C dry-bulb

Part Load Performance

MMY-AP4001* (40HP, 112kW system)

Cooling

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Cooling Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
40°C	104.2	34.22	26.98	21.82	17.41	13.76	10.86	8.72	7.34
35°C	112.0	32.34	25.49	20.60	16.42	12.95	10.20	8.17	6.85
30°C	112.0	26.77	21.25	17.26	13.87	11.06	8.85	7.22	6.19
25°C	112.0	23.97	19.11	15.58	12.57	10.09	8.13	6.71	5.81
20°C	112.0	22.29	17.82	14.55	11.78	9.49	7.69	6.38	5.56
15°C	112.0	20.72	16.61	13.60	11.03	8.92	7.27	6.07	5.32

Indoor air temperature conditions : 27.0°C dry-bulb / 19.0°C wet bulb

9

Heating

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Heating Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
15°C	126.5	28.80	23.71	19.70	16.19	13.18	10.66	8.64	7.12
11°C	126.5	31.04	25.42	21.01	17.15	13.83	11.05	8.83	7.15
7°C	126.5	33.05	26.96	22.20	18.02	14.44	11.44	9.03	7.20
1°C	117.6	33.61	27.36	22.47	18.19	14.50	11.42	8.94	7.06
-5°C	101.2	31.22	25.47	20.95	16.98	13.57	10.72	8.43	6.69
-10°C	86.0	28.08	23.00	18.98	15.45	12.42	9.89	7.85	6.31

Indoor air temperature conditions : 20.0°C dry-bulb

Part Load Performance

MMY-AP4801* (48HP, 135kW system)

Cooling

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Cooling Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
40°C	125.6	52.55	37.96	30.27	23.67	18.14	13.70	10.34	8.06
35°C	135.0	49.67	35.89	28.61	22.35	17.11	12.90	9.71	7.54
30°C	135.0	41.11	29.74	23.79	18.69	14.43	11.02	8.45	6.72
25°C	135.0	36.82	26.65	21.37	16.84	13.07	10.05	7.78	6.27
20°C	135.0	34.23	24.79	19.90	15.72	12.24	9.45	7.37	5.98
15°C	135.0	31.83	23.06	18.54	14.68	11.46	8.89	6.97	5.70

Indoor air temperature conditions : 27.0°C dry-bulb / 19.0°C wet bulb

Heating

Outdoor Unit Dry-Bulb (°C)	Outdoor Unit 100% Heating Capacity (kW)	Compressor + Outdoor Fan Power consumption (kW)							
		100% Capacity	90% Capacity	80% Capacity	70% Capacity	60% Capacity	50% Capacity	40% Capacity	30% Capacity
15°C	150.0	36.42	30.54	25.48	20.98	16.66	13.05	10.14	7.93
11°C	150.0	39.26	32.93	27.37	22.42	17.67	13.68	10.47	8.04
7°C	150.0	41.80	35.07	29.06	23.72	18.59	14.28	10.81	8.17
1°C	139.5	42.50	35.68	29.51	24.04	18.76	14.34	10.77	8.06
-5°C	120.0	39.49	33.17	27.46	22.39	17.51	13.42	10.12	7.61
-10°C	102.0	35.51	29.85	24.77	20.26	15.92	12.29	9.36	7.13

Indoor air temperature conditions : 20.0°C dry-bulb



Wiring guideline

WIRING DESIGN


1. General

- (1) Perform wiring of the power supplies in conformance with the regulations of the local electrical authorities.
- (2) Use a 2 core shielded wire for control wiring on connecting indoor units, and connecting of indoor units to outdoor units. This is recommended to prevent possible noise issues.
- (3) Be sure to connect an earth leakage breaker to the power supply of the indoor units.
- (4) Supply a separate power supply to each outdoor unit ensuring use of an earth leakage breaker and isolator.
- (5) Never connect 220–240V power to the terminal block (U1, U2, U3, U4, U5, U6)
(Fault will be caused.)
- (6) Locate wiring system for the control and refrigerant piping system in the same line.
- (7) Arrange the electrical cables so that they do not come in to contact with high-temperature parts of the pipework; otherwise insulation will melt and an accident may be caused.
- (8) Do not turn on the power supply of the indoor units until vacuuming of the refrigerant pipe has finished.


2. For outdoor unit power supply

- Select the power supply cabling and fuse of each outdoor unit from the following specifications:
5 core cable in conformance with Design 60245 IEC 66
- Do not connect the outdoor units by crossing outside of them, but connect them via the terminal block (L1, L2, L3, N).

Outdoor power supply
3-phase 380V–415, 50Hz
380V, 60Hz

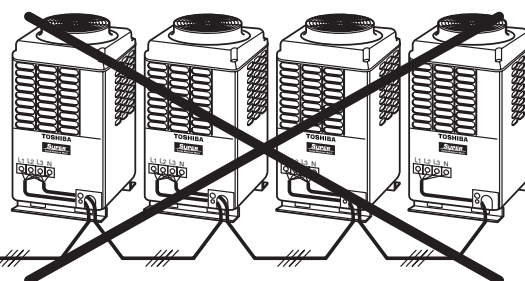

3. Electrical wiring design

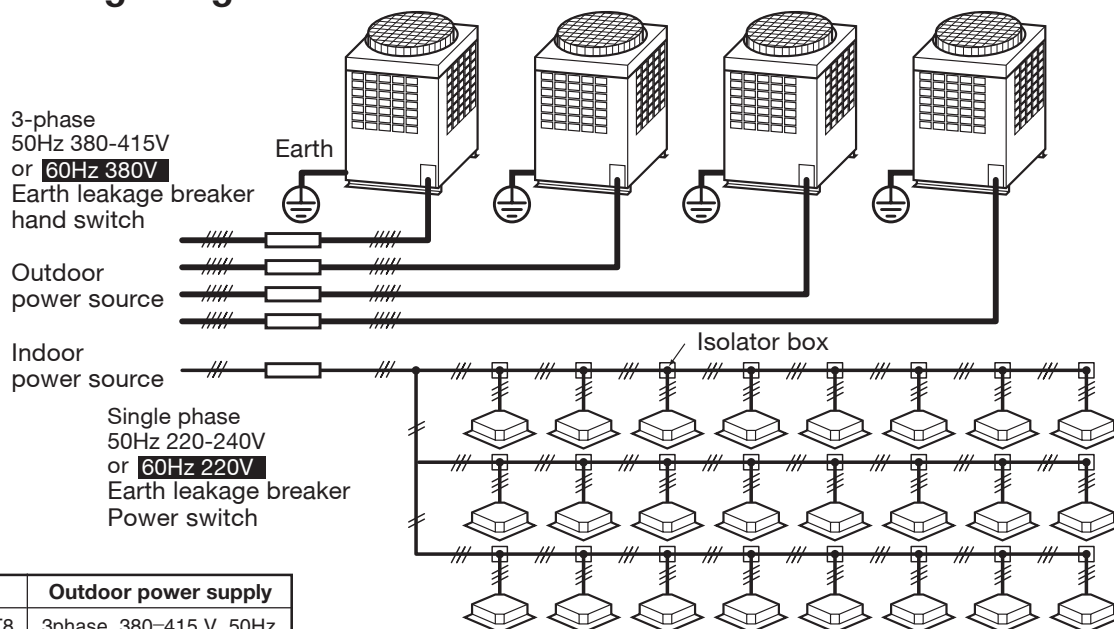

Model	Outdoor power supply
MMY-AP ••• T8, HT8	3phase, 380–415 V, 50Hz
MMY-AP ••• HT7	3phase, 380 V, 60Hz

- Unit capacities and power supply wire sizes (Reference)

Model MMY-			Power supply wiring	
			Wire size	Field size
MAP0501T8	MAP0501HT8	MAP0501HT7	3.5mm ² (A WG #12) Max. 26 m	20 A
MAP0601T8	MAP0601HT8	MAP0601HT7	3.5mm ² (A WG #12) Max. 26 m	20 A
MAP0801T8	MAP0801HT8	MAP0801HT7	3.5mm ² (A WG #10) Max. 20 m	30 A
MAP1001T8	MAP1001HT8	MAP1001HT7	5.5mm ² (A WG #10) Max. 28 m	30 A
MAP1201T8	MAP1201HT8	MAP1201HT7	5.5mm ² (A WG #10) Max. 27 m	30 A

- Determine the wire size for the indoor unit according to the number of connected indoor units downstream.
- Observe local regulations in reference to the wire size selection and installation.

4. For Indoor unit power supply (Must be independent from the outdoor unit power supply.)

Model	Power supply wiring				
	Wire size				Field fuse
All models of indoor units	2.0m ² (AWG#14)	Max. 20m	3.5m ² (AWG#12)	Max. 50m	15A


NOTE :

The above connecting lengths stated in the table, indicate the length from the isolator to the outdoor unit. When the power supply of the indoor units are connected in parallel, it is assumed that no more than a 2% voltage drop will occur. If the connecting length is to exceed the stated lengths, select a suitable wire in accordance with the local wiring standards.

CAUTIONS

- (1) Keep the refrigerant piping system and the indoor-indoor/indoor-outdoor control wiring systems together.
- (2) When running power supplies and control wires parallel to each other, either run them through separate conduits or maintain a suitable distance between them.
(Current capacity of power supplies: 10A or less for 300m, 50A or less for 500m)

5. Design of control wiring

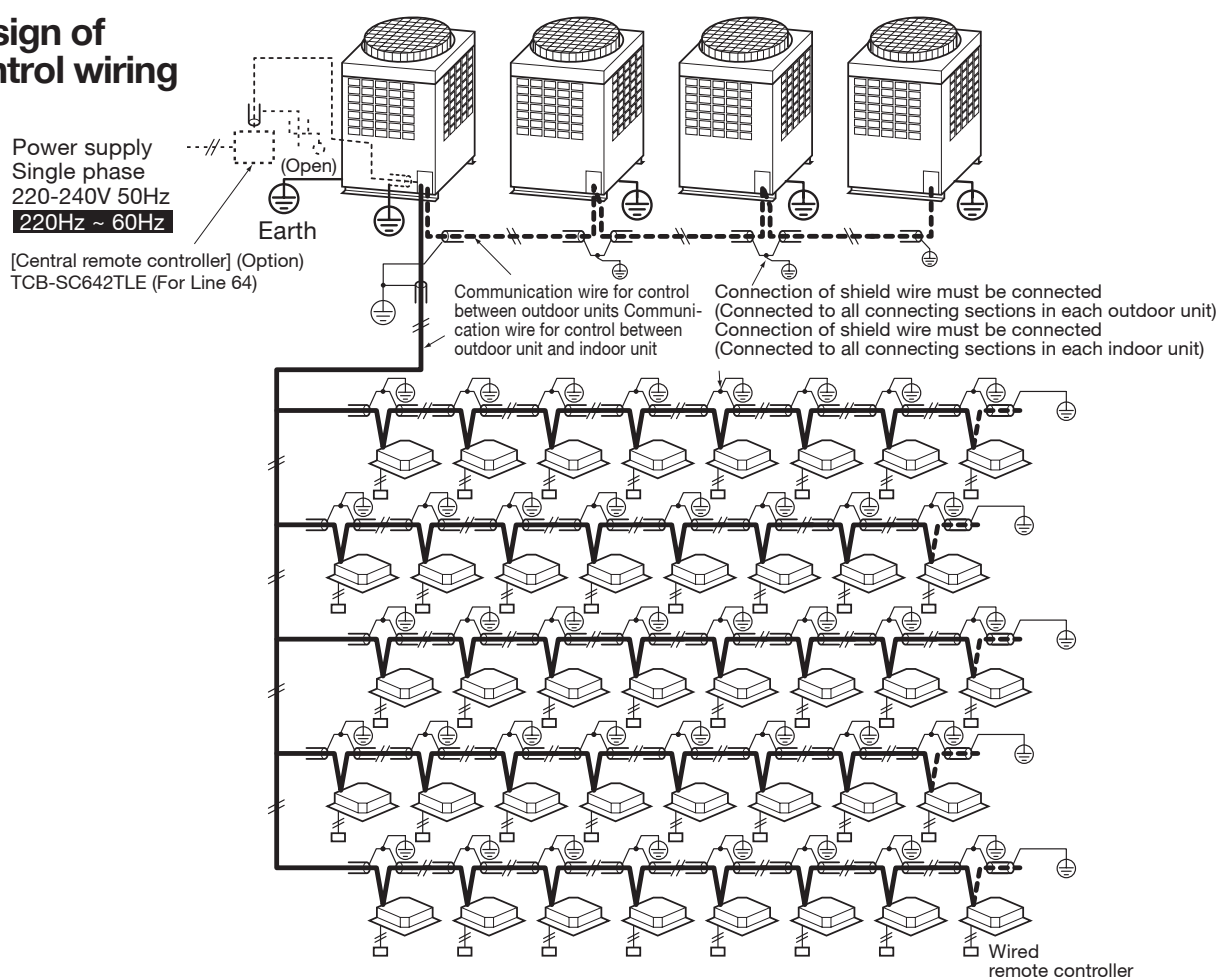

- Wire specification, quantity, size of crossover wiring and remote controller wiring

Name	Qty	Size			Specification
		Up to 500m	Up to 1000m	1000 to 2000m	
Crossover wiring (indoor-indoor / indoor-outdoor / outdoor-indoor control wiring, central control wiring)	2 cores	1.25mm ²		2.0mm ²	Shield wire
Remote controller wiring	2 cores	0.5 to 2.0mm ²	—	—	—

- (1) The crossover wiring and central control wiring uses a 2-core non-polarity communication wire. Use 2-core shielded wire to prevent possible noise issues. Connect the end of the shielded wires and earth(ground) at both the outdoor and indoor unit. Where the shielded wire is connected between a central controller and a outdoor unit, only earth(ground) at one end of the central control line.
- (2) Use 2-core non-polarity wire for remote controller. (A, B terminals)
Use 2-core non-polarity wire for wiring of group control. (A, B terminals)

6. Control wiring Diagram

1. All control wiring is 2-core non-polarity wire.
2. Be sure to use shield wire for the following wiring to prevent noise issues.
 - Outdoor-outdoor / indoor-indoor / outdoor-indoor control wiring, Central control wiring.

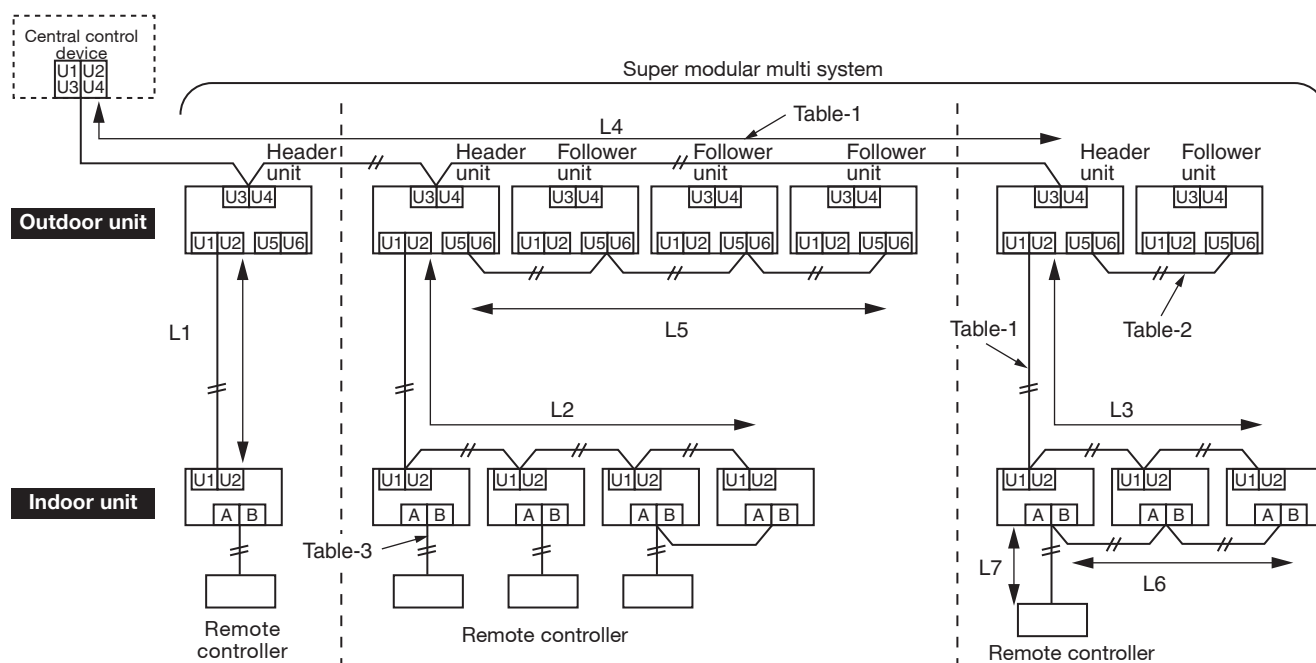


Table-1 Control wiring between indoor and outdoor units (L1, L2, L3), Central control wiring (L4)

Wiring	2-core, non-polarity
Type	Shield wire
Size Length	1.25 m ² : Up to 1000 m 2.0 m ² : Up to 2000 m (*1)

Note (*1) : Total length of control wiring length for all refrigerant circuits (L1 + L2 + L3 + L4)

Table-2 Control wiring between outdoor units (L5)

Wiring	2-core, non-polarity
Type	Shield wire
Size Length	1.25 m ² to 2.0 m ² Up to 100 m (L5)

Table-3 Remote controller wiring (L6, L7)

Wire	2-core
Size	0.5 m ² to 2.0 m ²
Length	• Up to 500 m (L6 + L7) • Up 400m in case of wireless remote controller in group control. • Up to 200m total length of control wiring between indoor units (L6)

50Hz

Type	Model	Nominal Voltage (V-Ph-Hz)	Voltage Range		Fan Motor		Power Supply	
			Min	Max	kW	FLA	MCA	MOCP
4-Way Air Discharge Cassette Type	MMU-AP 0091 H	230-1-50	198	264	0.060	0.20	0.25	15
	MMU-AP 0121 H	230-1-50	198	264	0.060	0.20	0.25	15
	MMU-AP 0151 H	230-1-50	198	264	0.060	0.22	0.28	15
	MMU-AP 0181 H	230-1-50	198	264	0.060	0.24	0.30	15
	MMU-AP 0241 H	230-1-50	198	264	0.060	0.28	0.35	15
	MMU-AP 0271 H	230-1-50	198	264	0.060	0.28	0.35	15
	MMU-AP 0301 H	230-1-50	198	264	0.060	0.40	0.50	15
	MMU-AP 0361 H	230-1-50	198	264	0.090	0.68	0.85	15
	MMU-AP 0481 H	230-1-50	198	264	0.090	0.93	1.16	15
2-Way Air Discharge Cassette Type	MMU-AP 0561 H	230-1-50	198	264	0.090	0.95	1.19	15
	MMU-AP 0071 WH	230-1-50	198	264	0.053	0.36	0.45	15
	MMU-AP 0091 WH	230-1-50	198	264	0.053	0.36	0.45	15
	MMU-AP 0121 WH	230-1-50	198	264	0.053	0.36	0.45	15
	MMU-AP 0151 WH	230-1-50	198	264	0.039	0.37	0.46	15
	MMU-AP 0181 WH	230-1-50	198	264	0.039	0.37	0.46	15
	MMU-AP 0241 WH	230-1-50	198	264	0.053	0.53	0.66	15
	MMU-AP 0271 WH	230-1-50	198	264	0.053	0.53	0.66	15
	MMU-AP 0301 WH	230-1-50	198	264	0.053	0.54	0.68	15
1-Way Air Discharge Cassette Type	MMU-AP 0481 WH	220-1-50	198	242	0.092	1.33	1.67	15
	MMU-AP 0071 YH	230-1-50	198	264	0.022	0.28	0.35	15
	MMU-AP 0091 YH	230-1-50	198	264	0.022	0.28	0.35	15
	MMU-AP 0121 YH	230-1-50	198	264	0.022	0.28	0.35	15
	MMU-AP 0151 SH	230-1-50	198	264	0.034	0.55	0.69	15
	MMU-AP 0181 SH	230-1-50	198	264	0.034	0.55	0.69	15
Concealed Duct Type	MMU-AP 0241 SH	230-1-50	198	264	0.034	0.63	0.79	15
	MMD-AP 0071 BH	230-1-50	198	264	0.120	0.33	0.41	15
	MMD-AP 0091 BH	230-1-50	198	264	0.120	0.33	0.41	15
	MMD-AP 0121 BH	230-1-50	198	264	0.120	0.39	0.49	15
	MMD-AP 0151 BH	230-1-50	198	264	0.120	0.39	0.49	15
	MMD-AP 0181 BH	230-1-50	198	264	0.120	0.50	0.62	15
	MMD-AP 0241 BH	230-1-50	198	264	0.120	0.60	0.75	15
	MMD-AP 0271 BH	230-1-50	198	264	0.120	0.60	0.75	15
	MMD-AP 0301 BH	230-1-50	198	264	0.120	0.70	0.88	15
	MMD-AP 0361 BH	230-1-50	198	264	0.120	0.96	1.20	15
Concealed Duct High Static Pressure Type	MMD-AP 0481 BH	230-1-50	198	264	0.120	1.13	1.41	15
	MMD-AP 0561 BH	230-1-50	198	264	0.120	1.13	1.41	15
	MMD-AP 0181 H	230-1-50	198	264	0.160	0.93	1.16	15
	MMD-AP 0241 H	230-1-50	198	264	0.160	1.55	1.94	15
	MMD-AP 0271 H	230-1-50	198	264	0.160	1.55	1.94	15
	MMD-AP 0361 H	230-1-50	198	264	0.260	1.87	2.34	15
	MMD-AP 0481 H	230-1-50	198	264	0.260	2.12	2.65	15
	MMD-AP 0721 H	230-1-50	198	264	0.370 x 3	6.04	7.55	15
Under Ceiling Type	MMD-AP 0961 H	230-1-50	198	264	0.370 x 3	6.35	7.94	15
	MMC-AP 0151 H	230-1-50	198	264	0.030	0.33	0.41	15
	MMC-AP 0181 H	230-1-50	198	264	0.030	0.37	0.46	15
	MMC-AP 0241 H	230-1-50	198	264	0.040	0.48	0.60	15
	MMC-AP 0271 H	230-1-50	198	264	0.040	0.48	0.60	15
	MMC-AP 0361 H	230-1-50	198	264	0.080	0.90	1.13	15
Hige Wall Type	MMC-AP 0481 H	230-1-50	198	264	0.080	0.96	1.20	15
	MMK-AP 0071 H	230-1-50	198	264	0.030	0.35	0.44	15
	MMK-AP 0091 H	230-1-50	198	264	0.030	0.35	0.44	15
	MMK-AP 0121 H	230-1-50	198	264	0.030	0.35	0.44	15
	MMK-AP 0151 H	230-1-50	198	264	0.030	0.37	0.46	15
	MMK-AP 0181 H	230-1-50	198	264	0.030	0.37	0.46	15
Floor Standing Cabinet Type	MMK-AP 0241 H	230-1-50	198	264	0.030	0.40	0.50	15
	MML-AP 0071 H	230-1-50	198	264	0.045	0.30	0.37	15
	MML-AP 0091 H	230-1-50	198	264	0.045	0.30	0.37	15
	MML-AP 0121 H	230-1-50	198	264	0.045	0.49	0.62	15
	MML-AP 0151 H	230-1-50	198	264	0.045	0.49	0.62	15
	MML-AP 0181 H	230-1-50	198	264	0.070	0.54	0.68	15
Floor Standing Concealed Type	MML-AP 0241 H	230-1-50	198	264	0.070	0.54	0.68	15
	MML-AP 0071 BH	230-1-50	198	264	0.019	0.29	0.36	15
	MML-AP 0091 BH	230-1-50	198	264	0.019	0.29	0.36	15
	MML-AP 0121 BH	230-1-50	198	264	0.019	0.29	0.36	15
	MML-AP 0151 BH	230-1-50	198	264	0.070	0.52	0.65	15
	MML-AP 0181 BH	230-1-50	198	264	0.070	0.52	0.65	15
Floor Standing Type	MML-AP 0241 BH	230-1-50	198	264	0.070	0.53	0.66	15
	MMF-AP 0151 H	230-1-50	198	264	0.037	0.77	0.96	15
	MMF-AP 0181 H	230-1-50	198	264	0.037	0.77	0.96	15
	MMF-AP 0241 H	230-1-50	198	264	0.063	1.01	1.27	15
	MMF-AP 0271 H	230-1-50	198	264	0.063	1.01	1.27	15
	MMF-AP 0361 H	230-1-50	198	264	0.110	1.48	1.85	15
	MMF-AP 0481 H	230-1-50	198	264	0.160	1.84	2.30	15
	MMF-AP 0561 H	230-1-50	198	264	0.160	1.84	2.30	15

60Hz

Type	Model	Nominal Voltage (V-Ph-Hz)	Voltage Range		Fan Motor		Power Supply	
			Min	Max	kW	FLA	MCA	MOCP
4-Way Air Discharge Cassette Type	MMU-AP 0091 H	220-1-60	198	242	0.060	0.21	0.26	15
	MMU-AP 0121 H	220-1-60	198	242	0.060	0.21	0.26	15
	MMU-AP 0151 H	220-1-60	198	242	0.060	0.23	0.29	15
	MMU-AP 0181 H	220-1-60	198	242	0.060	0.25	0.31	15
	MMU-AP 0241 H	220-1-60	198	242	0.060	0.29	0.37	15
	MMU-AP 0271 H	220-1-60	198	242	0.060	0.29	0.37	15
	MMU-AP 0301 H	220-1-60	198	242	0.060	0.42	0.52	15
	MMU-AP 0361 H	220-1-60	198	242	0.090	0.70	0.88	15
2-Way Air Discharge Cassette Type	MMU-AP 0481 H	220-1-60	198	242	0.090	0.98	1.22	15
	MMU-AP 0561 H	220-1-60	198	242	0.090	1.00	1.25	15
	MMU-AP 0071 WH	220-1-60	198	242	0.053	0.38	0.47	15
	MMU-AP 0091 WH	220-1-60	198	242	0.053	0.38	0.47	15
	MMU-AP 0121 WH	220-1-60	198	242	0.053	0.38	0.47	15
	MMU-AP 0151 WH	220-1-60	198	242	0.039	0.44	0.55	15
	MMU-AP 0181 WH	220-1-60	198	242	0.039	0.44	0.55	15
	MMU-AP 0241 WH	220-1-60	198	242	0.053	0.61	0.76	15
1-Way Air Discharge Cassette Type	MMU-AP 0271 WH	220-1-60	198	242	0.053	0.61	0.76	15
	MMU-AP 0301 WH	220-1-60	198	242	0.053	0.67	0.84	15
	MMU-AP 0071 YH	220-1-60	198	242	0.022	0.30	0.37	15
	MMU-AP 0091 YH	220-1-60	198	242	0.022	0.30	0.37	15
	MMU-AP 0121 YH	220-1-60	198	242	0.022	0.30	0.37	15
Concealed Duct Type	MMU-AP 0151 SH	220-1-60	198	242	0.034	0.62	0.78	15
	MMU-AP 0181 SH	220-1-60	198	242	0.034	0.62	0.78	15
	MMU-AP 0241 SH	220-1-60	198	242	0.034	0.70	0.88	15
	MMD-AP 0071 BH	220-1-60	198	242	0.120	0.35	0.43	15
	MMD-AP 0091 BH	220-1-60	198	242	0.120	0.35	0.43	15
	MMD-AP 0121 BH	220-1-60	198	242	0.120	0.41	0.51	15
	MMD-AP 0151 BH	220-1-60	198	242	0.120	0.41	0.51	15
	MMD-AP 0181 BH	220-1-60	198	242	0.120	0.52	0.65	15
	MMD-AP 0241 BH	220-1-60	198	242	0.120	0.63	0.78	15
	MMD-AP 0271 BH	220-1-60	198	242	0.120	0.63	0.78	15
	MMD-AP 0301 BH	220-1-60	198	242	0.120	0.73	0.91	15
	MMD-AP 0361 BH	220-1-60	198	242	0.120	1.00	1.25	15
Concealed Duct High Static Pressure Type	MMD-AP 0481 BH	220-1-60	198	242	0.120	1.18	1.48	15
	MMD-AP 0561 BH	220-1-60	198	242	0.120	1.18	1.48	15
	MMD-AP 0181 H	220-1-60	198	242	0.160	1.06	1.32	15
	MMD-AP 0241 H	220-1-60	198	242	0.160	2.07	2.59	15
	MMD-AP 0271 H	220-1-60	198	242	0.160	2.07	2.59	15
	MMD-AP 0361 H	220-1-60	198	242	0.260	2.38	2.98	15
Under Ceiling Type	MMD-AP 0481 H	220-1-60	198	242	0.260	2.60	3.25	15
	MMD-AP 0721 H	220-1-60	198	242	0.370 x 3	8.17	10.2	15
	MMD-AP 0961 H	220-1-60	198	242	0.370 x 3	8.53	10.7	15
	MMC-AP 0151 H	220-1-60	198	242	0.030	0.35	0.43	15
	MMC-AP 0181 H	220-1-60	198	242	0.030	0.39	0.48	15
	MMC-AP 0241 H	220-1-60	198	242	0.040	0.50	0.63	15
Hige Wall Type	MMC-AP 0271 H	220-1-60	198	242	0.040	0.50	0.63	15
	MMC-AP 0361 H	220-1-60	198	242	0.080	0.94	1.18	15
	MMC-AP 0481 H	220-1-60	198	242	0.080	1.00	1.25	15
	MMK-AP 0071 H	220-1-60	198	242	0.030	0.37	0.46	15
	MMK-AP 0091 H	220-1-60	198	242	0.030	0.37	0.46	15
	MMK-AP 0121 H	220-1-60	198	242	0.030	0.37	0.46	15
Floor Standing Cabinet Type	MMK-AP 0151 H	220-1-60	198	242	0.030	0.39	0.48	15
	MMK-AP 0181 H	220-1-60	198	242	0.030	0.39	0.48	15
	MMK-AP 0241 H	220-1-60	198	242	0.030	0.40	0.50	15
	MML-AP 0071 H	220-1-60	198	242	0.045	0.29	0.36	15
	MML-AP 0091 H	220-1-60	198	242	0.045	0.29	0.36	15
	MML-AP 0121 H	220-1-60	198	242	0.045	0.51	0.63	15
Floor Standing Concealed Type	MML-AP 0151 H	220-1-60	198	242	0.045	0.51	0.63	15
	MML-AP 0181 H	220-1-60	198	242	0.070	0.61	0.76	15
	MML-AP 0241 H	220-1-60	198	242	0.070	0.61	0.76	15
	MML-AP 0071 BH	220-1-60	198	242	0.019	0.31	0.39	15
	MML-AP 0091 BH	220-1-60	198	242	0.019	0.31	0.39	15
	MML-AP 0121 BH	220-1-60	198	242	0.019	0.31	0.39	15
Floor Standing Type	MML-AP 0151 BH	220-1-60	198	242	0.070	0.53	0.66	15
	MML-AP 0181 BH	220-1-60	198	242	0.070	0.53	0.66	15
	MML-AP 0241 BH	220-1-60	198	242	0.070	0.59	0.73	15
	MMF-AP 0151 H	220-1-60	198	242	0.037	0.77	0.96	15
	MMF-AP 0181 H	220-1-60	198	242	0.037	0.77	0.96	15
	MMF-AP 0241 H	220-1-60	198	242	0.063	1.04	1.29	15
	MMF-AP 0271 H	220-1-60	198	242	0.063	1.04	1.29	15
	MMF-AP 0361 H	220-1-60	198	242	0.110	1.58	1.97	15
	MMF-AP 0481 H	220-1-60	198	242	0.160	2.01	2.52	15
	MMF-AP 0561 H	220-1-60	198	242	0.160	2.01	2.52	15

■ Single outdoor unit

Heat Pump Model MMY-	Cooling Only model MMY-	Nominal Voltage (V-Ph-Hz)	Voltage Range		Compressor				Fan Motor		Power Supply		
			Min	Max	RLA	LRA			kW	FLA	MCA	MOCP	ICF
MAP0501HT8	MAP0501T8	400-3-50	342	457	4.0 + 4.0				0.60	0.8	16.5	20	—
MAP0601HT8	MAP0601T8	400-3-50	342	457	4.6 + 4.6				0.60	0.8	16.5	20	—
MAP0801HT8	MAP0801T8	400-3-50	342	457	5.2 + 5.2				0.60	1.0	20.0	30	—
MAP1001HT8	MAP1001T8	400-3-50	342	457	6.5 + 6.5				0.60	1.1	22.5	30	—
MAP1201HT8	MAP1201T8	400-3-50	342	457	9.5 + 9.5				0.60	1.1	24.5	30	—

50Hz

■ Combination of outdoor unit

Heat Pump Model MMY-	Cooling Only model MMY-	Nominal Voltage (V-Ph-Hz)	Voltage Range		Compressor										Fan Motor		Power Supply		
			Min	Max	Unit No.1		Unit No.2		Unit No.3		Unit No.4		LRA	FLA	kW	FLA	MCA	MOCP	ICF
					RLA	LRA	RLA	LRA	RLA	LRA	RLA	LRA							
AP1401HT8	AP1401T8	400-3-50	342	457	5.2 + 5.2	—	4.6 + 4.6	—	—	—	—	—	—	—	0.6x 2	1.0 + 0.8	36.5	40	—
AP1601HT8	AP1601T8	400-3-50	342	457	5.2 + 5.2	—	5.2 + 5.2	—	—	—	—	—	—	—	0.6x 2	1.0 + 1.0	40.0	50	—
AP1801HT8	AP1801T8	400-3-50	342	457	6.5 + 6.5	—	5.2 + 5.2	—	—	—	—	—	—	—	0.6x 2	1.0 + 1.1	42.5	50	—
AP2001HT8	AP2001T8	400-3-50	342	457	6.5 + 6.5	—	6.5 + 6.5	—	—	—	—	—	—	—	0.6x 2	1.1 + 1.1	45.0	60	—
AP2201HT8	AP2201T8	400-3-50	342	457	5.2 + 5.2	—	5.2 + 5.2	—	4.6 + 4.6	—	—	—	—	—	0.6x 3	1.0 + 1.0 + 0.8	56.5	70	—
AP2211HT8	AP2211T8	400-3-50	342	457	9.5 + 9.5	—	6.5 + 6.5	—	—	—	—	—	—	—	0.6x 2	1.1 + 1.1	47.0	60	—
AP2401HT8	AP2401T8	400-3-50	342	457	5.2 + 5.2	—	5.2 + 5.2	—	5.2 + 5.2	—	—	—	—	—	0.6x 3	1.0 + 1.0 + 1.0	60.0	70	—
AP2411HT8	AP2411T8	400-3-50	342	457	9.5 + 9.5	—	9.5 + 9.5	—	—	—	—	—	—	—	0.6x 2	1.1 + 1.1	49.0	60	—
AP2601HT8	AP2601T8	400-3-50	342	457	6.5 + 6.5	—	5.2 + 5.2	—	5.2 + 5.2	—	—	—	—	—	0.6x 3	1.1 + 1.1 + 1.0	62.5	70	—
AP2801HT8	AP2801T8	400-3-50	342	457	6.5 + 6.5	—	6.5 + 6.5	—	5.2 + 5.2	—	—	—	—	—	0.6x 3	1.1 + 1.1 + 1.0	65.0	80	—
AP3001HT8	AP3001T8	400-3-50	342	457	6.5 + 6.5	—	6.5 + 6.5	—	6.5 + 6.5	—	—	—	—	—	0.6x 3	1.1 + 1.1 + 1.1	67.5	80	—
AP3201HT8	AP3201T8	400-3-50	342	457	5.2 + 5.2	—	5.2 + 5.2	—	5.2 + 5.2	—	5.2 + 5.2	—	—	—	0.6x 4	1.0 + 1.0 + 1.0 + 1.0	80.0	90	—
AP3211HT8	AP3211T8	400-3-50	342	457	9.5 + 9.5	—	6.5 + 6.5	—	6.5 + 6.5	—	—	—	—	—	0.6x 3	1.1 + 1.1 + 1.1	69.5	80	—
AP3401HT8	AP3401T8	400-3-50	342	457	6.5 + 6.5	—	5.2 + 5.2	—	5.2 + 5.2	—	5.2 + 5.2	—	—	—	0.6x 4	1.1 + 1.0 + 1.0 + 1.0	82.5	100	—
AP3411HT8	AP3411T8	400-3-50	342	457	9.5 + 9.5	—	9.5 + 9.5	—	6.5 + 6.5	—	—	—	—	—	0.6x 3	1.1 + 1.1 + 1.1	71.5	80	—
AP3601HT8	AP3601T8	400-3-50	342	457	6.5 + 6.5	—	6.5 + 6.5	—	5.2 + 5.2	—	5.2 + 5.2	—	—	—	0.6x 4	1.1 + 1.1 + 1.0 + 1.0	85.0	100	—
AP3611HT8	AP3611T8	400-3-50	342	457	9.5 + 9.5	—	9.5 + 9.5	—	9.5 + 9.5	—	—	—	—	—	0.6x 3	1.1 + 1.1 + 1.1	73.5	90	—
AP3801HT8	AP3801T8	400-3-50	342	457	6.5 + 6.5	—	6.5 + 6.5	—	6.5 + 6.5	—	5.2 + 5.2	—	—	—	0.6x 4	1.1 + 1.1 + 1.1 + 1.0	87.5	100	—
AP4001HT8	AP4001T8	400-3-50	342	457	6.5 + 6.5	—	6.5 + 6.5	—	6.5 + 6.5	—	6.5 + 6.5	—	—	—	0.6x 4	1.1 + 1.1 + 1.1 + 1.1	90.0	100	—
AP4201HT8	AP4201T8	400-3-50	342	457	9.5 + 9.5	—	6.5 + 6.5	—	6.5 + 6.5	—	6.5 + 6.5	—	—	—	0.6x 4	1.1 + 1.1 + 1.1 + 1.1	92.0	110	—
AP4401HT8	AP4401T8	400-3-50	342	457	9.5 + 9.5	—	9.5 + 9.5	—	6.5 + 6.5	—	6.5 + 6.5	—	—	—	0.6x 4	1.1 + 1.1 + 1.1 + 1.1	94.0	110	—
AP4601HT8	AP4601T8	400-3-50	342	457	9.5 + 9.5	—	9.5 + 9.5	—	9.5 + 9.5	—	6.5 + 6.5	—	—	—	0.6x 4	1.1 + 1.1 + 1.1 + 1.1	96.0	110	—
AP4801HT8	AP4801T8	400-3-50	342	457	9.5 + 9.5	—	9.5 + 9.5	—	9.5 + 9.5	—	9.5 + 9.5	—	—	—	0.6x 4	1.1 + 1.1 + 1.1 + 1.1	98.0	110	—

Legend

MCA : Minimum Circuit Amps
MOCP : Maximum Overcurrent Protection (Amps)
ICF : Maximum Instantaneous Current Flow Start
RLA : Rated Load Amps

LRA : Locked Rotor Amps
FLA : Full Load Amps
kW : Fan Motor Rated Output (kW)

NOTE :
RLA is based on the following conditions.
Indoor temperature : 27°C DB/19°C WB
Outdoor temperature : 35°C DB

Single outdoor unit

60Hz

Heat Pump Model MMY-	Nominal Voltage (V-Ph-Hz)	Voltage Range		Compressor			Fan Motor		Power Supply			
		Min	Max	RLA	LRA		kW	FLA	MCA	MOCP	ICF	
MAP0501HT7	380-3-60	342	418	4.2 + 4.2			0.60	0.8	16.5	20	—	
MAP0601HT7	380-3-60	342	418	4.8 + 4.8			0.60	0.8	16.5	20	—	
MAP0801HT7	380-3-60	342	418	5.4 + 5.4			0.60	1.0	20.0	30	—	
MAP1001HT7	380-3-60	342	418	6.9 + 6.9			0.60	1.1	22.5	30	—	
MAP1201HT7	380-3-60	342	418	10.0 + 10.0			0.60	1.1	24.5	30	—	

Combination of outdoor unit

Heat Pump Model MMY-	Nominal Voltage (V-Ph-Hz)	Voltage Range		Compressor										Fan Motor		Power Supply			
				Unit No.1		Unit No.2		Unit No.3		Unit No.4		RLA	LRA	kW	FLA	MCA	MOCP	ICF	
		Min	Max	RLA	LRA	RLA	LRA	RLA	LRA	RLA	LRA								
AP1401HT7	380-3-60	342	418	5.4 + 5.4	—	4.8 + 4.8	—	—	—	—	—	—	—	0.6 x 2	1.0 + 0.8	36.5	40	—	—
AP1601HT7	380-3-60	342	418	5.4 + 5.2	—	5.4 + 5.4	—	—	—	—	—	—	—	0.6 x 2	1.0 + 1.0	40.0	50	—	—
AP1801HT7	380-3-60	342	418	6.9 + 6.9	—	5.4 + 5.4	—	—	—	—	—	—	—	0.6 x 2	1.0 + 1.1	42.5	50	—	—
AP2001HT7	380-3-60	342	418	6.9 + 6.9	—	6.9 + 6.9	—	—	—	—	—	—	—	0.6 x 2	1.1 + 1.1	45.0	60	—	—
AP2201HT7	380-3-60	342	418	5.4 + 5.4	—	5.4 + 5.4	—	4.8 + 4.8	—	—	—	—	—	0.6 x 3	1.0 + 1.0 + 0.8	56.5	70	—	—
AP2211HT7	380-3-60	342	418	10.0 + 10.0	—	6.9 + 6.9	—	—	—	—	—	—	—	0.6 x 2	1.1 + 1.1	47.0	60	—	—
AP2401HT7	380-3-60	342	418	5.4 + 5.4	—	5.4 + 5.4	—	5.4 + 5.4	—	—	—	—	—	0.6 x 3	1.0 + 1.0 + 1.0	60.0	70	—	—
AP2411HT7	380-3-60	342	418	10.0 + 10.0	—	10.0 + 10.0	—	—	—	—	—	—	—	0.6 x 2	1.1 + 1.1	49.0	60	—	—
AP2601HT7	380-3-60	342	418	6.9 + 6.9	—	5.4 + 5.4	—	5.4 + 5.4	—	—	—	—	—	0.6 x 3	1.1 + 1.1 + 1.0	62.5	70	—	—
AP2801HT7	380-3-60	342	418	6.9 + 6.9	—	6.9 + 6.9	—	5.4 + 5.4	—	—	—	—	—	0.6 x 3	1.1 + 1.1 + 1.0	65.0	80	—	—
AP3001HT7	380-3-60	342	418	6.9 + 6.9	—	6.9 + 6.9	—	6.9 + 6.9	—	—	—	—	—	0.6 x 3	1.1 + 1.1 + 1.1	67.5	80	—	—
AP3201HT7	380-3-60	342	418	5.4 + 5.4	—	5.4 + 5.4	—	5.4 + 5.4	—	5.4 + 5.4	—	—	—	0.6 x 4	1.0 + 1.0 + 1.0 + 1.0	80.0	90	—	—
AP3211HT7	380-3-60	342	418	10.0 + 10.0	—	6.9 + 6.9	—	6.9 + 6.9	—	—	—	—	—	0.6 x 3	1.1 + 1.1 + 1.1	69.5	80	—	—
AP3401HT7	380-3-60	342	418	6.9 + 6.9	—	5.4 + 5.4	—	5.4 + 5.4	—	5.4 + 5.4	—	—	—	0.6 x 4	1.1 + 1.0 + 1.0 + 1.0	82.5	100	—	—
AP3411HT7	380-3-60	342	418	10.0 + 10.0	—	10.0 + 10.0	—	6.9 + 6.9	—	—	—	—	—	0.6 x 3	1.1 + 1.1 + 1.1	71.5	80	—	—
AP3601HT7	380-3-60	342	418	6.9 + 6.9	—	6.9 + 6.9	—	5.4 + 5.4	—	5.4 + 5.4	—	—	—	0.6 x 4	1.1 + 1.1 + 1.0 + 1.0	85.0	100	—	—
AP3611HT7	380-3-60	342	418	10.0 + 10.0	—	10.0 + 10.0	—	10.0 + 10.0	—	—	—	—	—	0.6 x 3	1.1 + 1.1 + 1.1	73.5	90	—	—
AP3801HT7	380-3-60	342	418	6.9 + 6.9	—	6.9 + 6.9	—	6.9 + 6.9	—	5.4 + 5.4	—	—	—	0.6 x 4	1.1 + 1.1 + 1.1 + 1.0	87.5	100	—	—
AP4001HT7	380-3-60	342	418	6.9 + 6.9	—	6.9 + 6.9	—	6.9 + 6.9	—	6.9 + 6.9	—	—	—	0.6 x 4	1.1 + 1.1 + 1.1 + 1.1	90.0	100	—	—
AP4201HT7	380-3-60	342	418	10.0 + 10.0	—	6.9 + 6.9	—	6.9 + 6.9	—	6.9 + 6.9	—	—	—	0.6 x 4	1.1 + 1.1 + 1.1 + 1.1	92.0	110	—	—
AP4401HT7	380-3-60	342	418	10.0 + 10.0	—	10.0 + 10.0	—	6.9 + 6.9	—	6.9 + 6.9	—	—	—	0.6 x 4	1.1 + 1.1 + 1.1 + 1.1	94.0	110	—	—
AP4601HT7	380-3-60	342	418	10.0 + 10.0	—	10.0 + 10.0	—	10.0 + 10.0	—	6.9 + 6.9	—	—	—	0.6 x 4	1.1 + 1.1 + 1.1 + 1.1	96.0	110	—	—
AP4801HT7	380-3-60	342	418	10.0 + 10.0	—	10.0 + 10.0	—	10.0 + 10.0	—	10.0 + 10.0	—	—	—	06 x 4	1.1 + 1.1 + 1.1 + 1.1	98.0	110	—	—

Legend

MCA : Minimum Circuit Amps
MOCP : Maximum Overcurrent Protection (Amps)
ICF : Maximum Instantaneous Current Flow Start
RLA : Rated Load Amps

LRA : Locked Rotor Amps
FLA : Full Load Amps
kW : Fan Motor Rated Output (kW)

NOTE :

RLA is based on the following conditions.
Indoor temperature : 27°C DB/19°C WB
Outdoor temperature : 35°C DB




Wiring diagram

1. Indoor Unit


1-1. 4-way Air Discharge Cassette Type

Model: MMU-AP0091H, AP0121H, AP0151H, AP0181H, AP0241H,
MMU-AP0271H, AP0301H, AP0361H, AP0481H, AP0561H

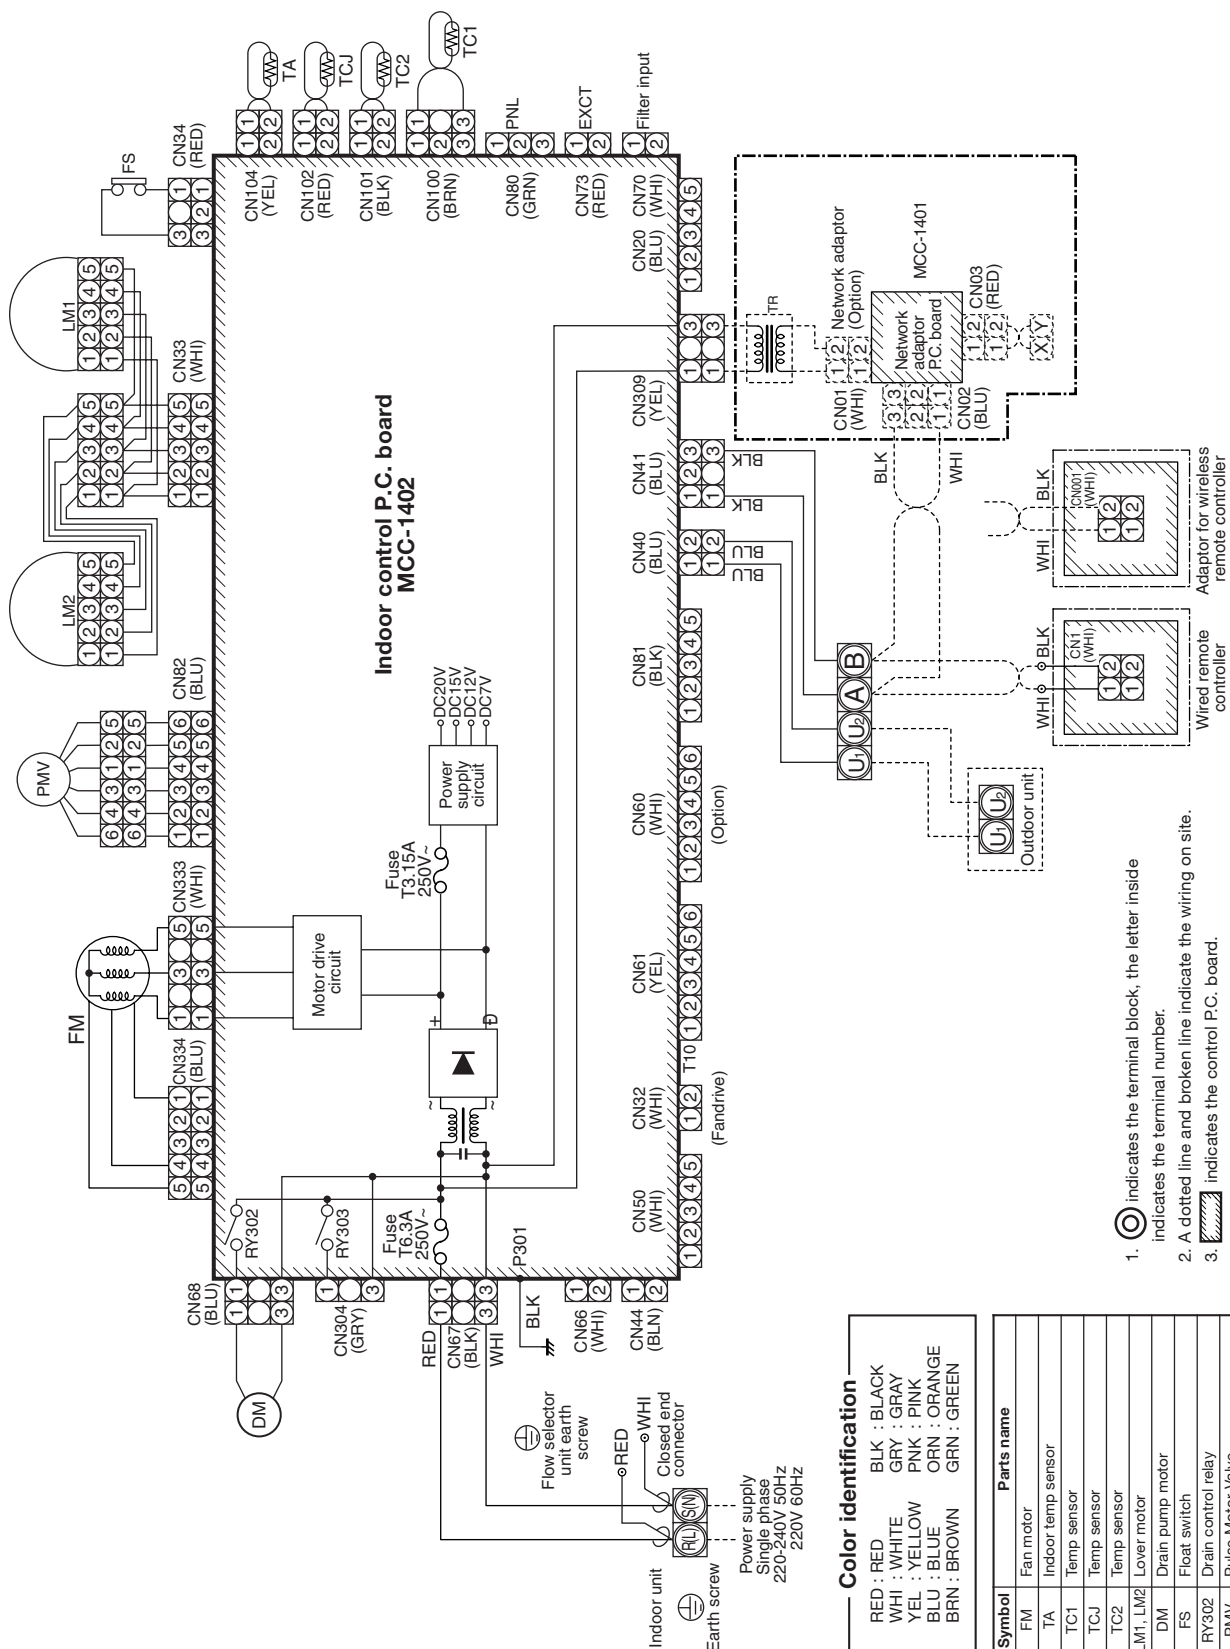


1-2. 2-way Air Discharge Cassette Type

Model: MMU-AP0071WH, AP0091WH, AP0121WH, AP0151WH, AP0181WH,
MMU-AP0241WH, AP0271WH, AP0301WH, AP0481WH

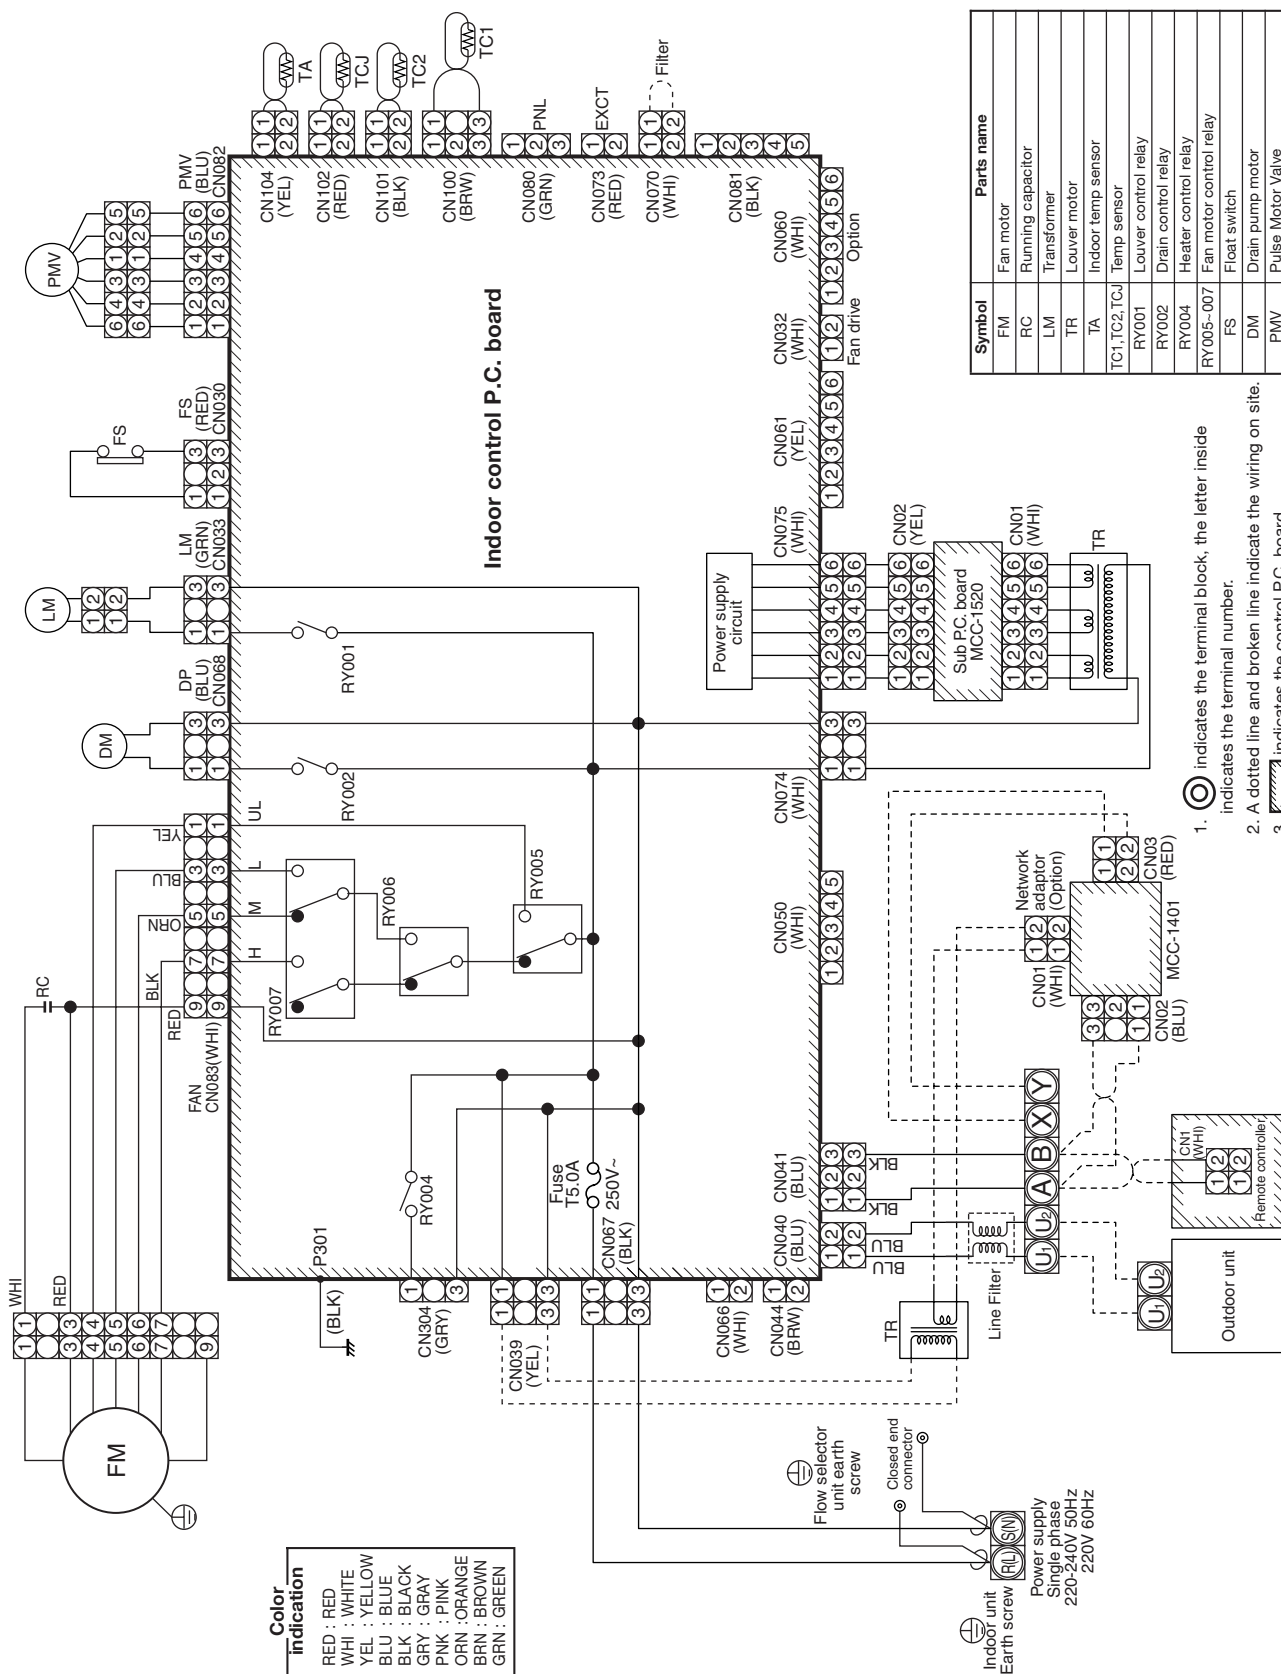

1-3. 1-way Air Discharge Cassette Type (Compact type)

Model: MMU-AP0071YH, AP0091YH, AP0121YH

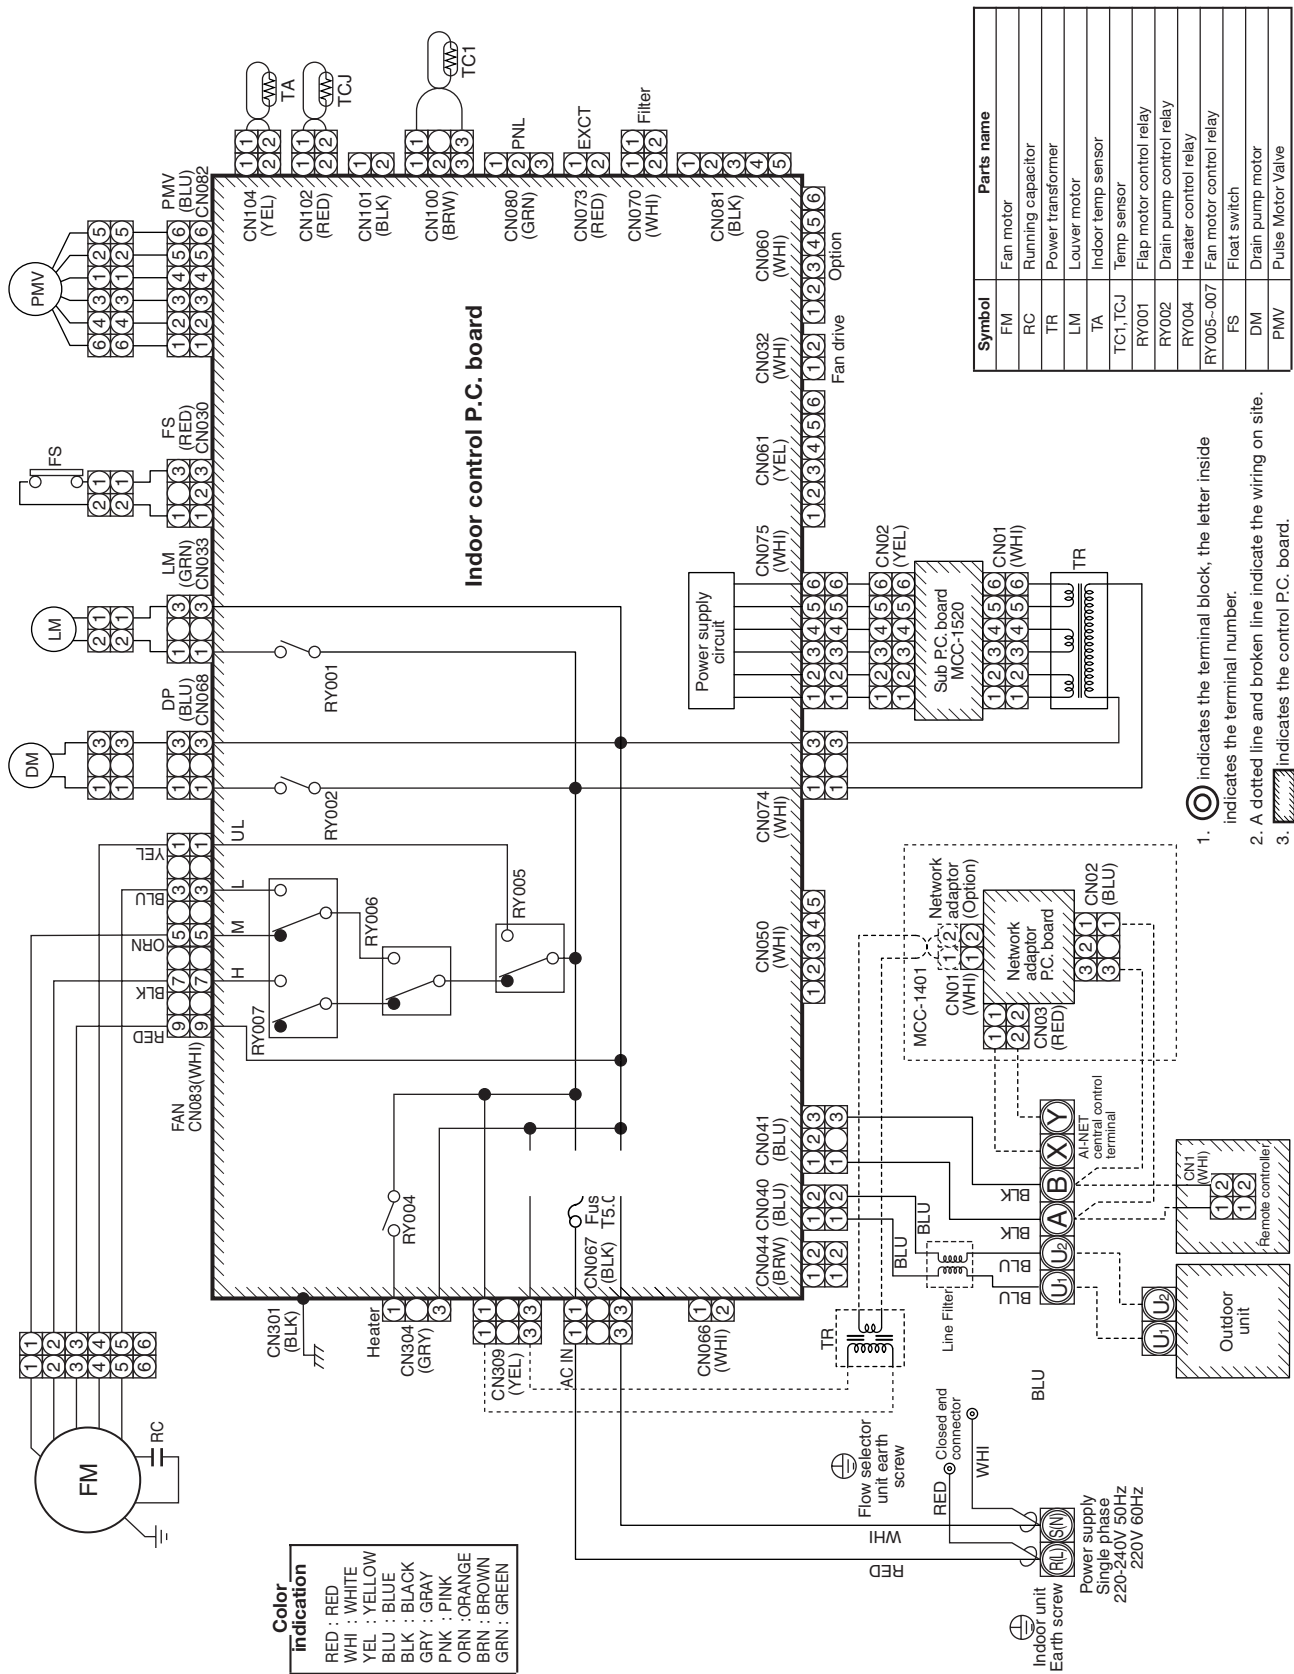


**Model: MMD-AP0071BH, AP0091BH, AP0121BH, AP0151BH, AP0181BH, AP0241BH
MMD-AP0271BH, AP0301BH, AP0361BH, AP0481BH, AP0561BH**




1-5. Concealed Duct High Static Pressure Type

Model: MMD-AP0181H, AP0241H, AP0271H, AP0361H, AP0481H

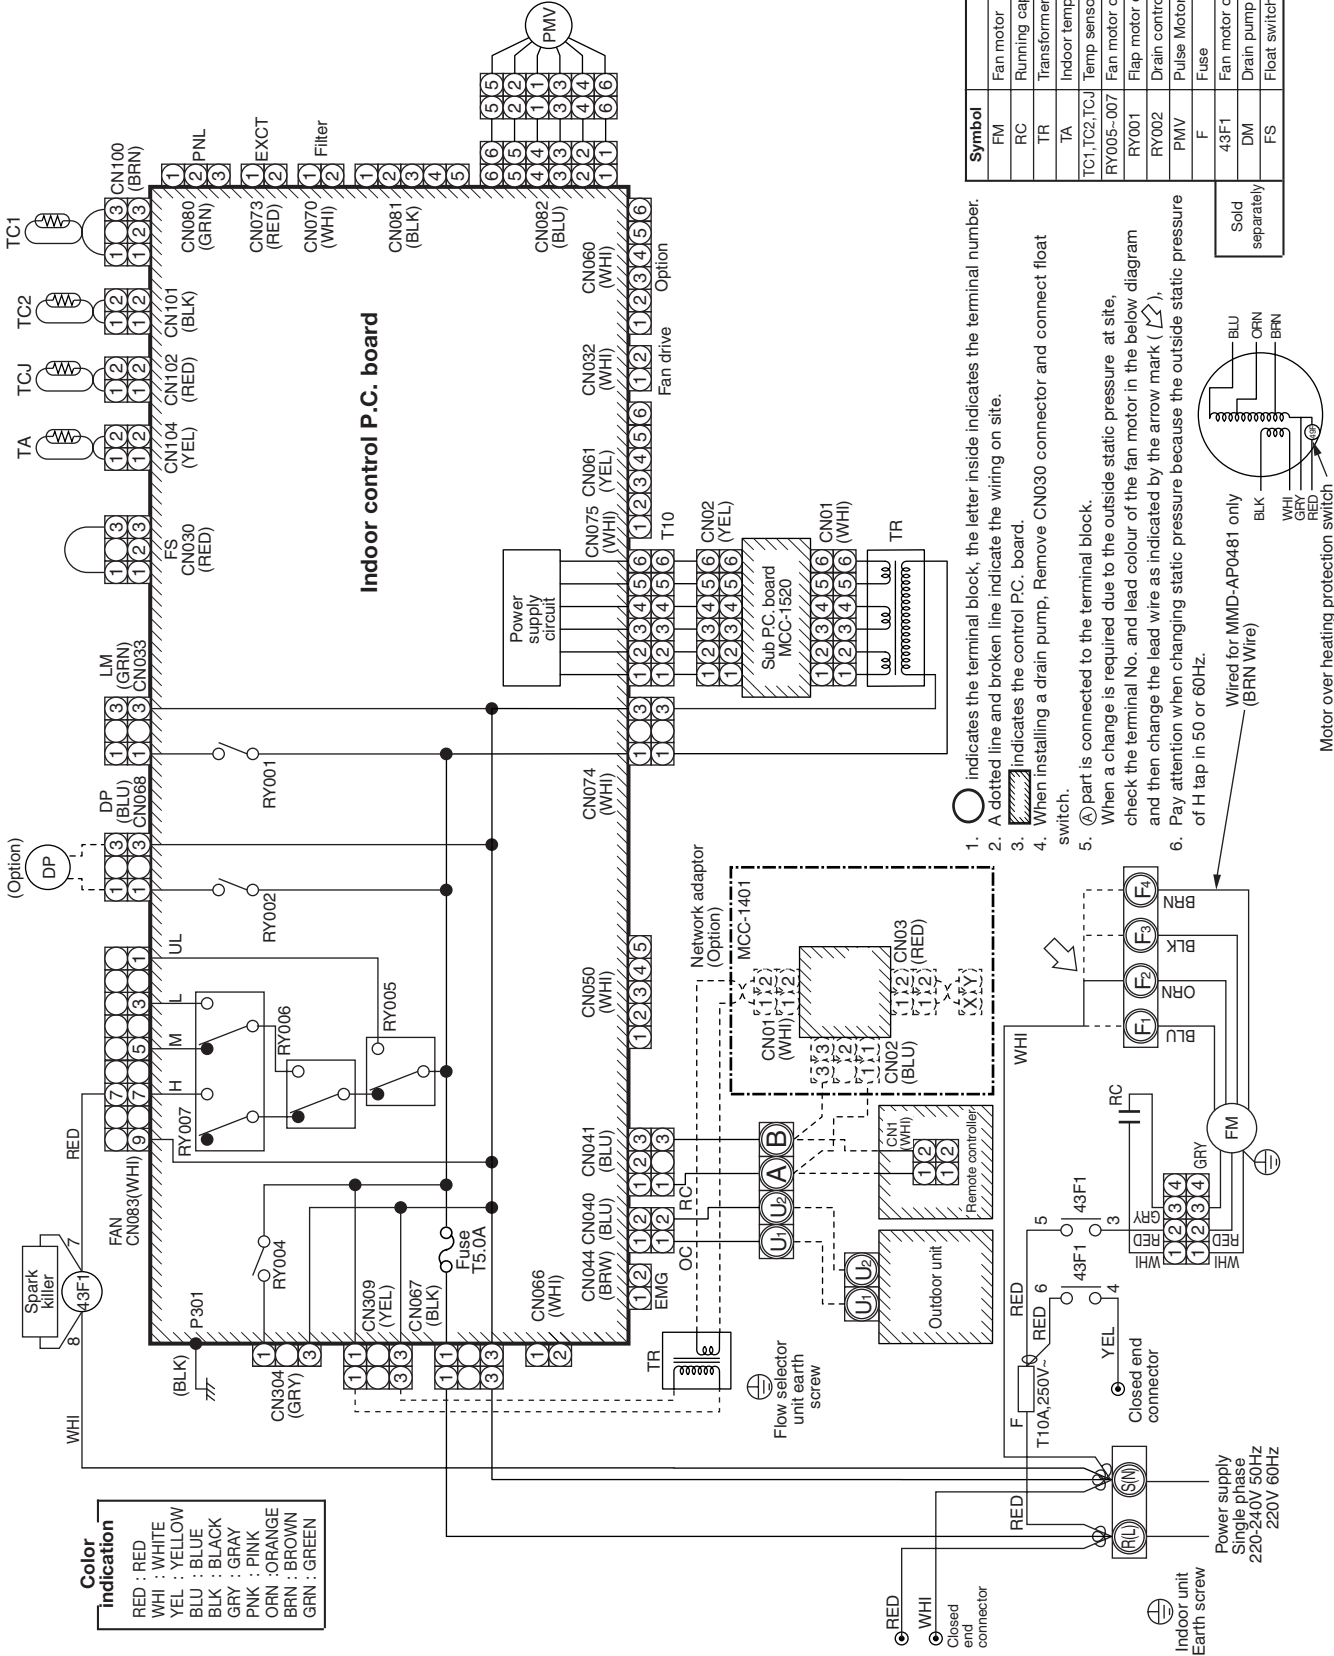

Model: MMD-AP0721H, AP0961H

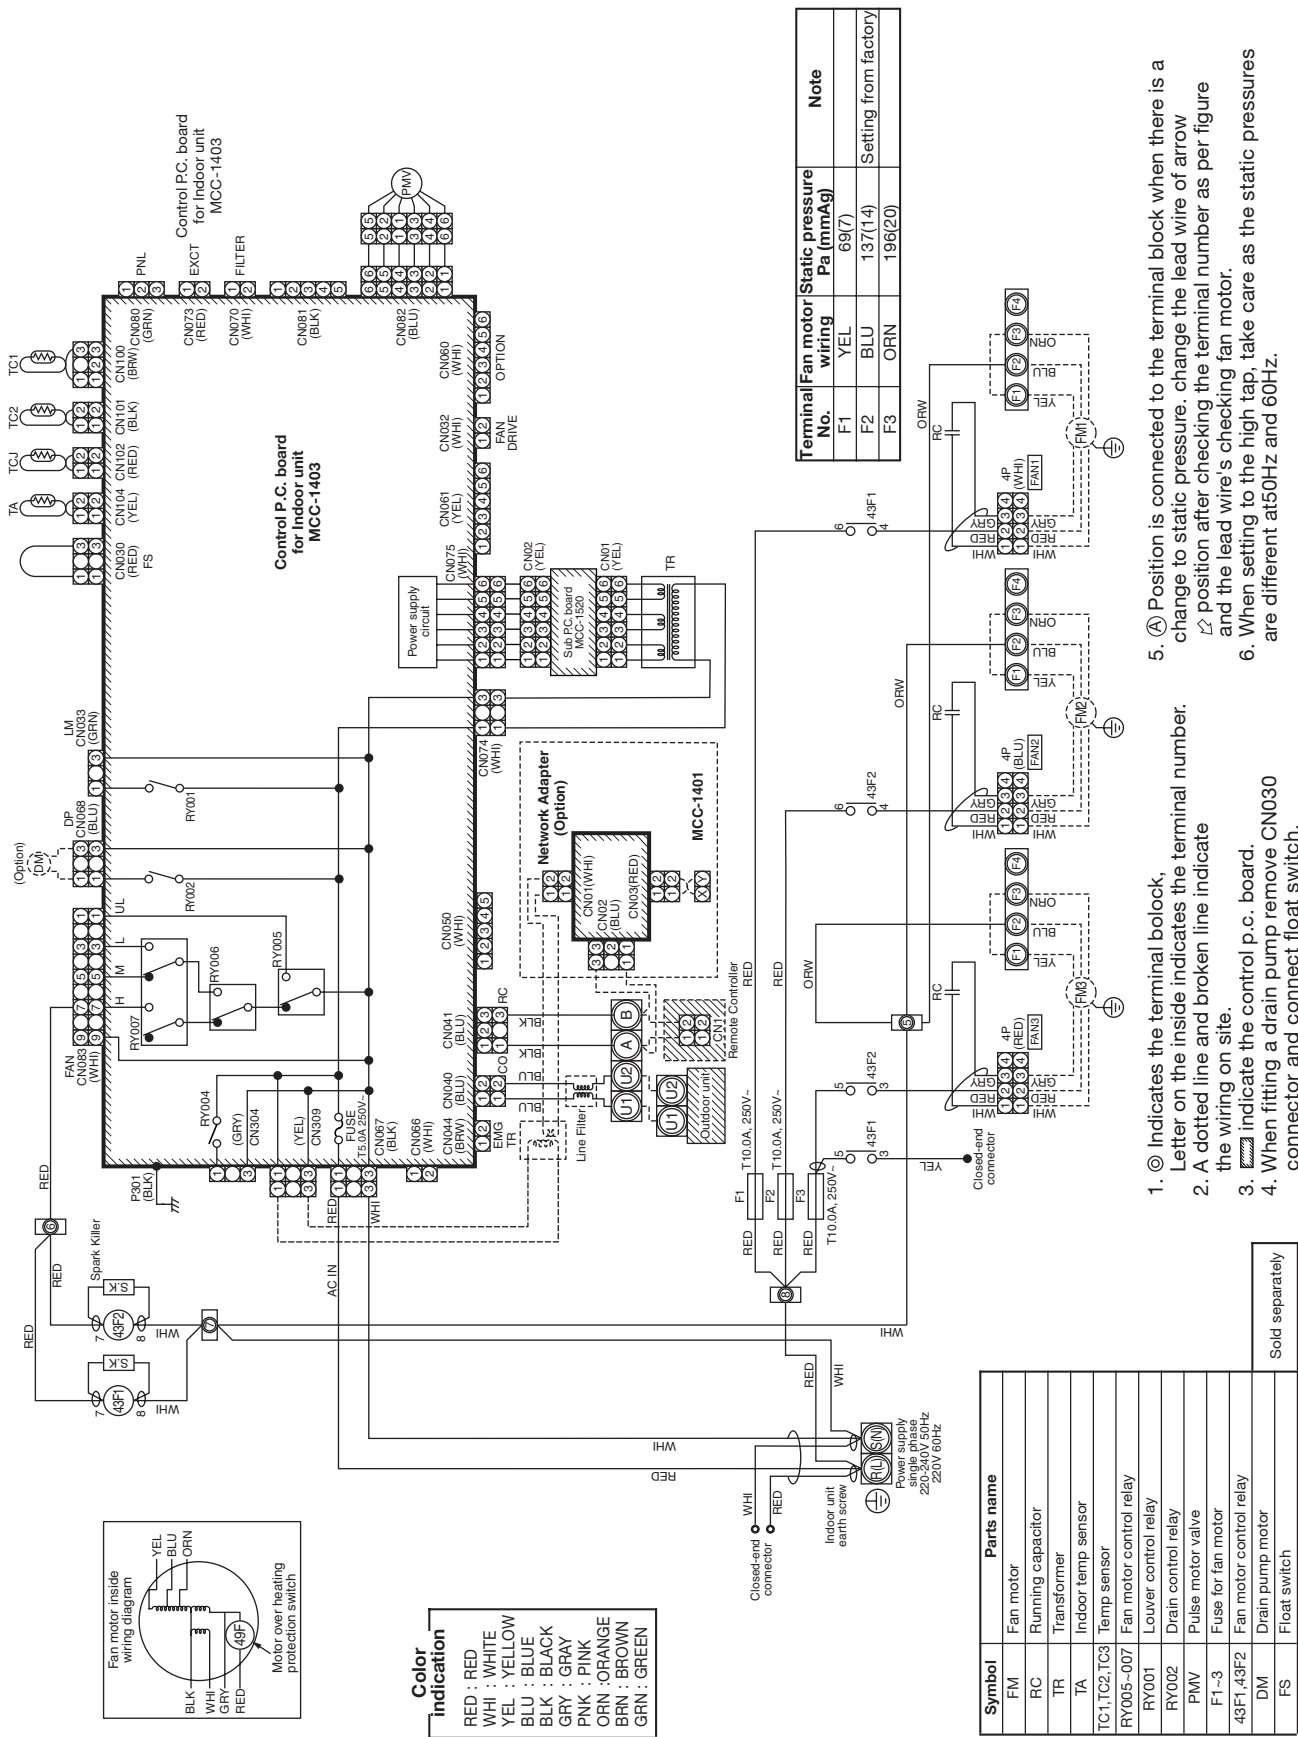


11

Model: MMC-AP0151H, AP0181H, AP0241H, AP0271H, AP0361H, AP0481H




1-7. High Wall Type

Model: MMK-AP0071H, AP0091H, AP0121H, AP0151H, AP0181H, AP0241H

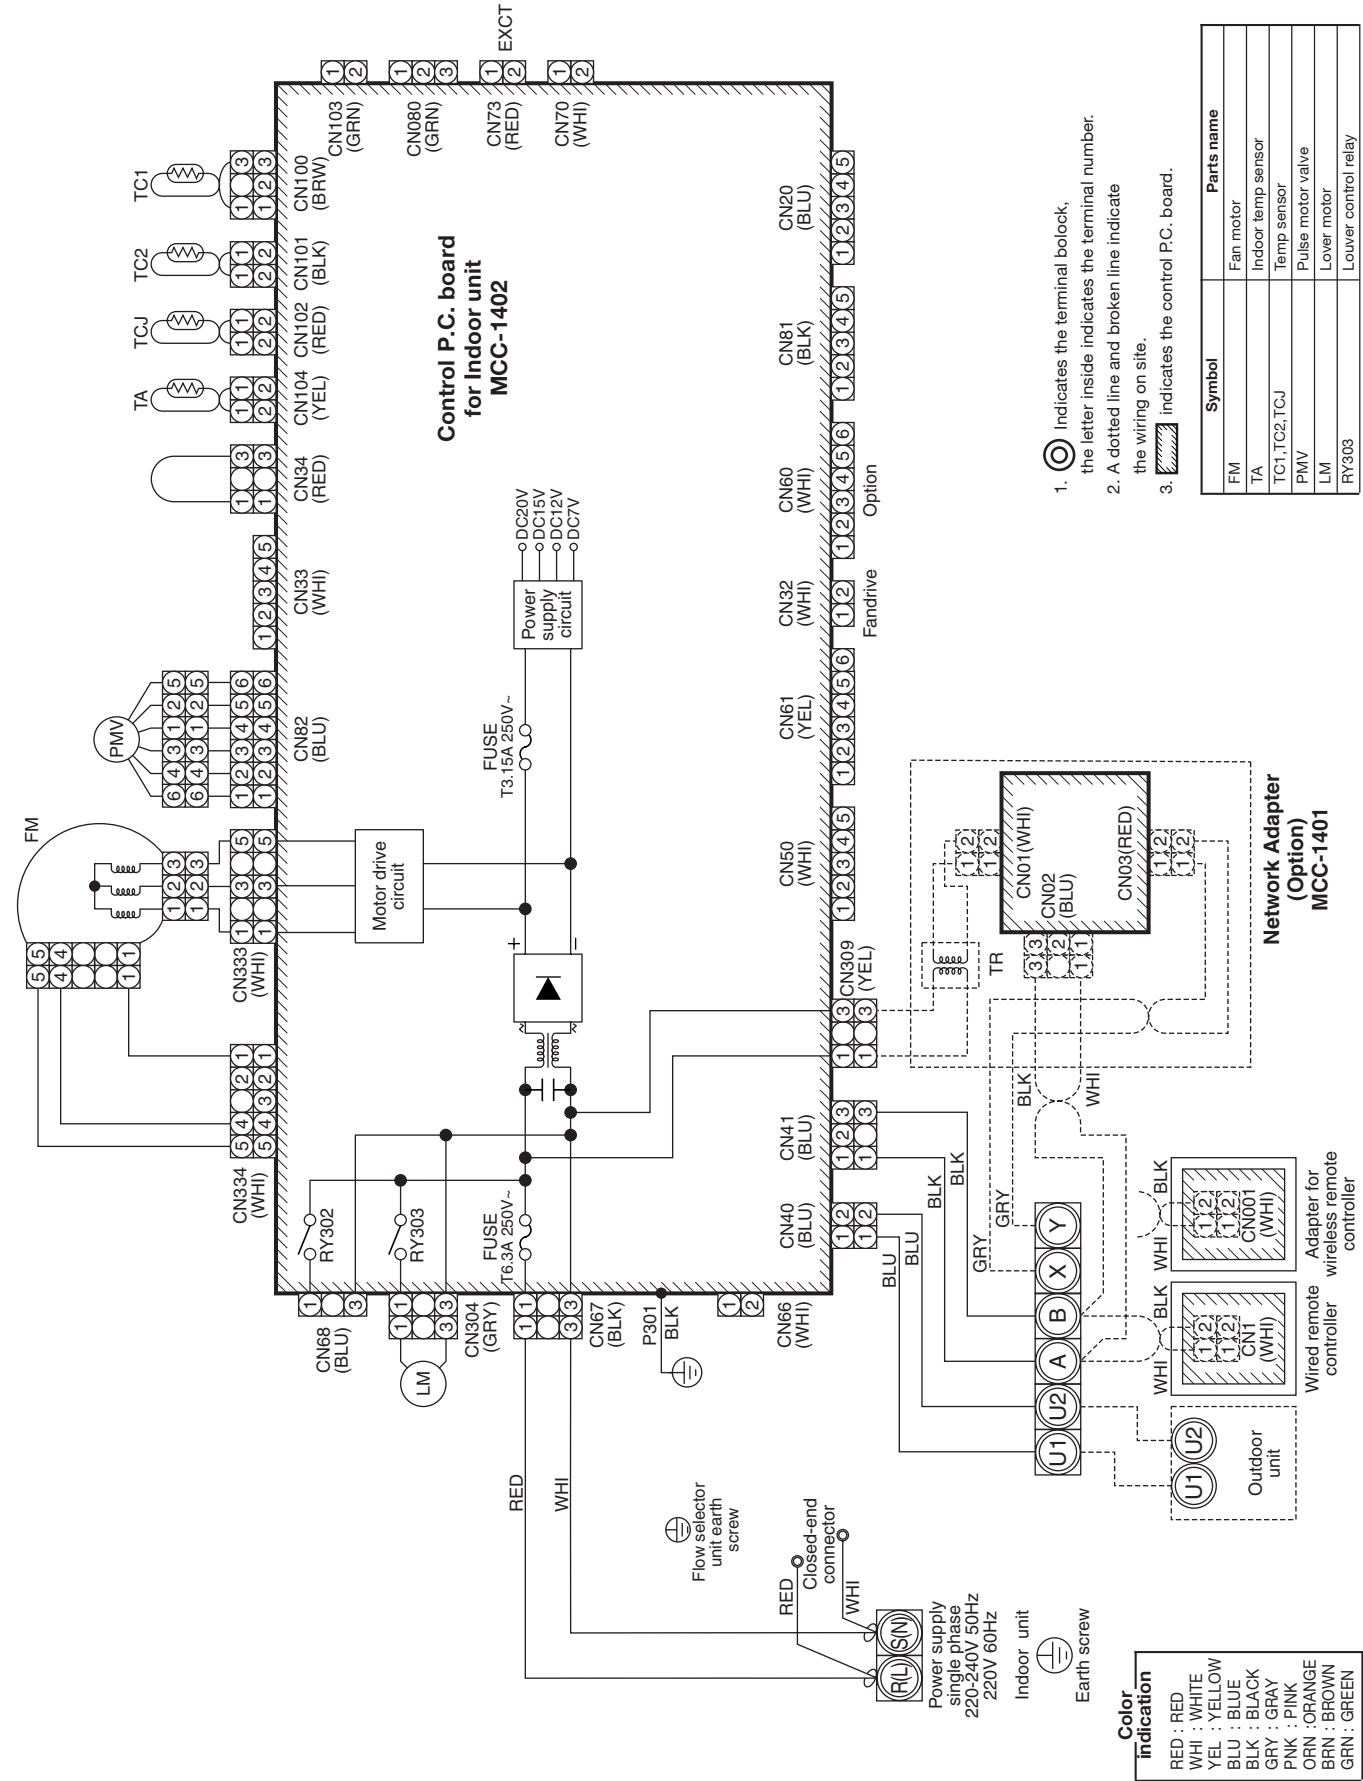

1-8. Floor Standing Cabinet Type


Model: MML-AP0071H, AP0091H, AP0121H, AP0151H, AP0181H, AP0241H

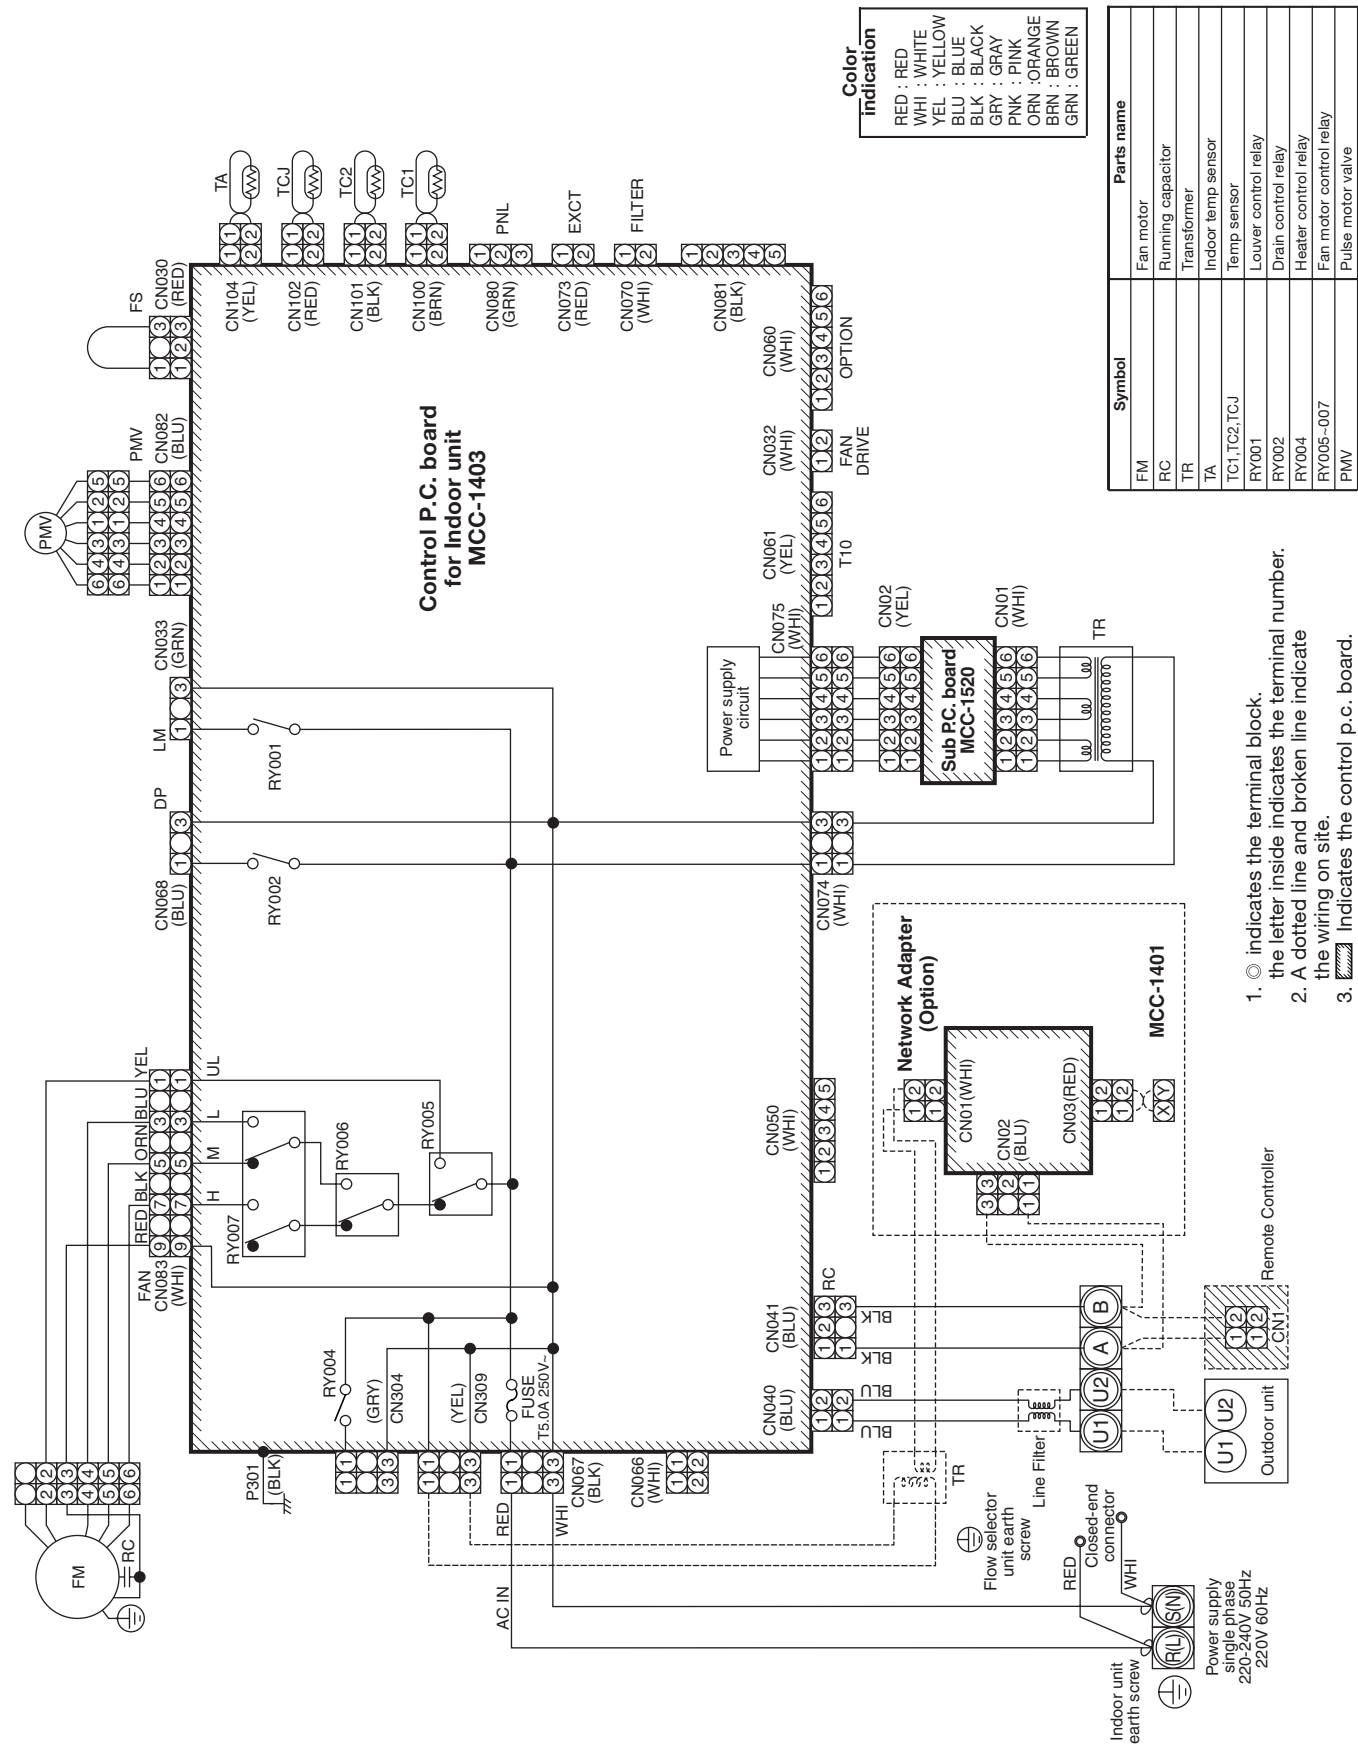

1. ○ indicates the terminal block.
the letter inside indicates the terminal number.
2. A dotted line and broken line indicate the wiring on site.
3. [Hatched Box] indicates the control p.c. board.


1-9. Floor Standing Concealed Type

Model: MML-AP0071BH, AP0091BH, AP0121BH, AP0151BH, AP0181BH, AP0241BH

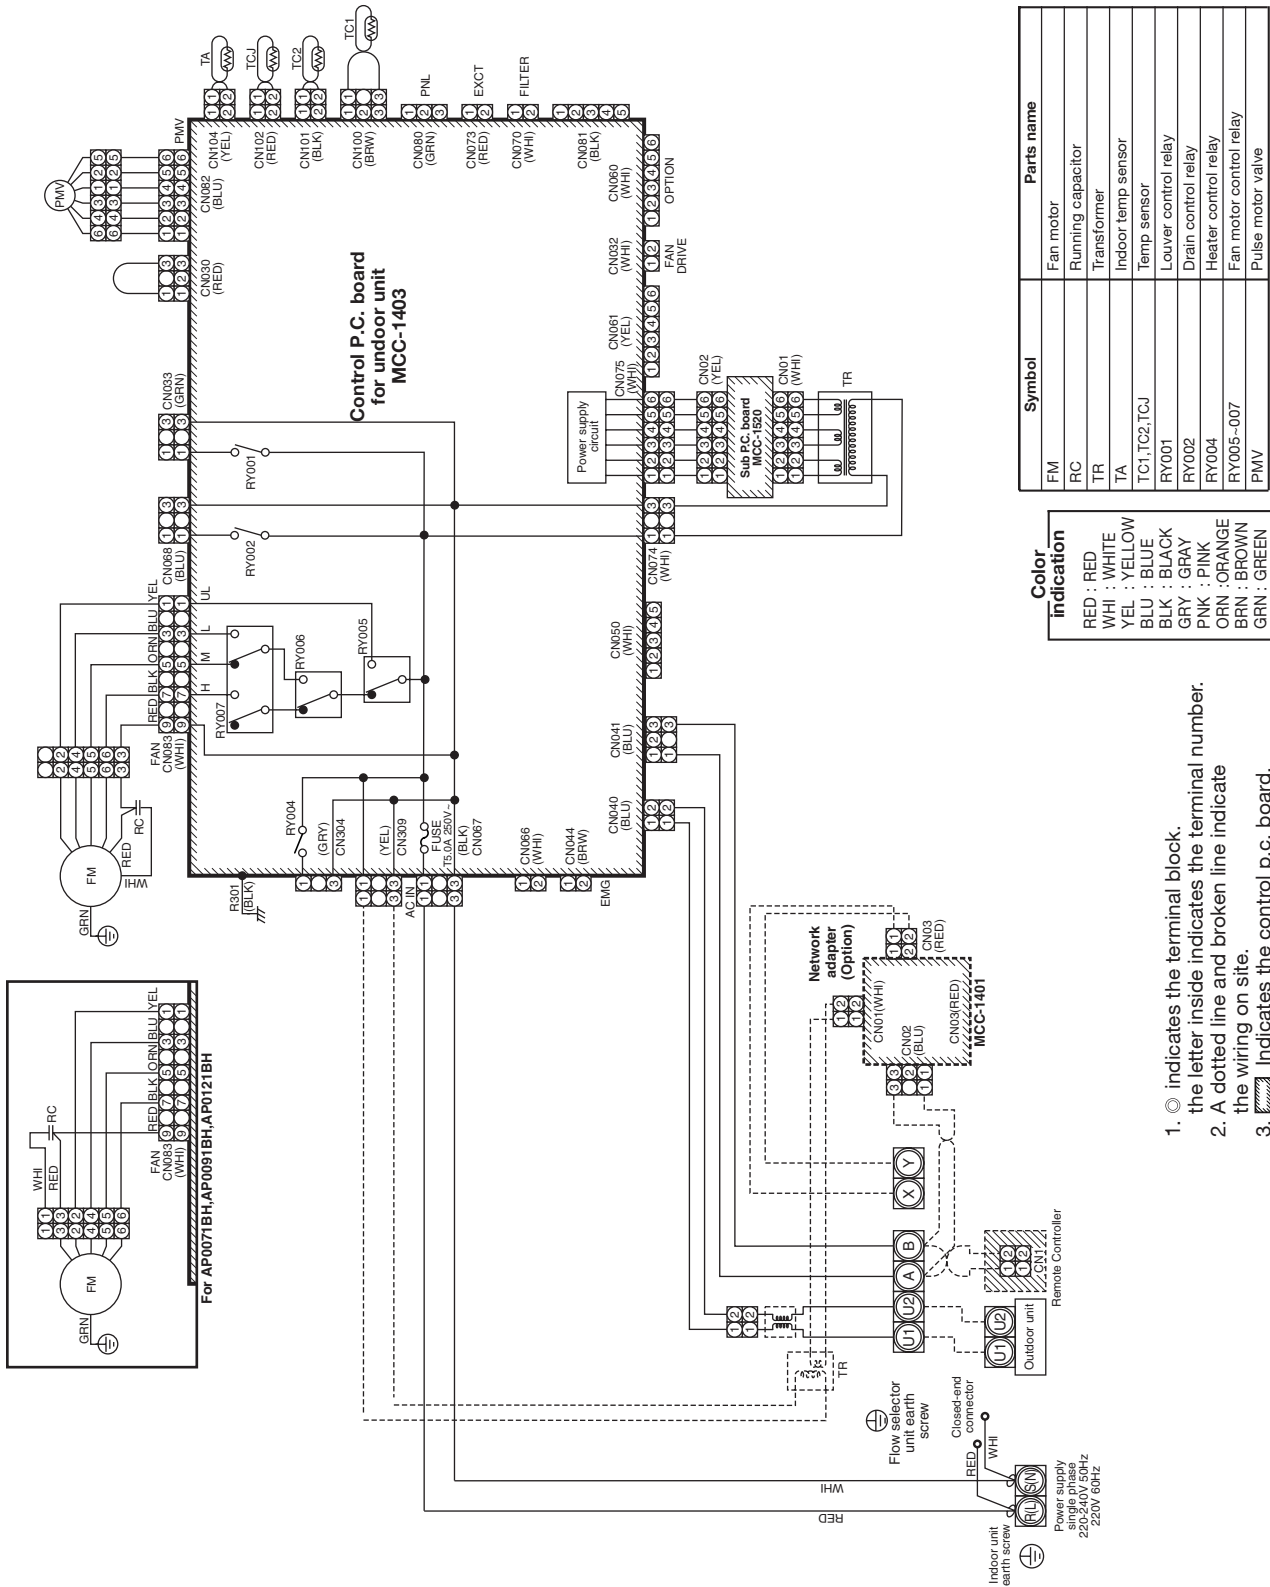

1-10. Floor Standing Type


Model: MMF-AP0151H, AP0181H, AP0241H, AP0271H, AP0361H, AP0481H, AP0561H

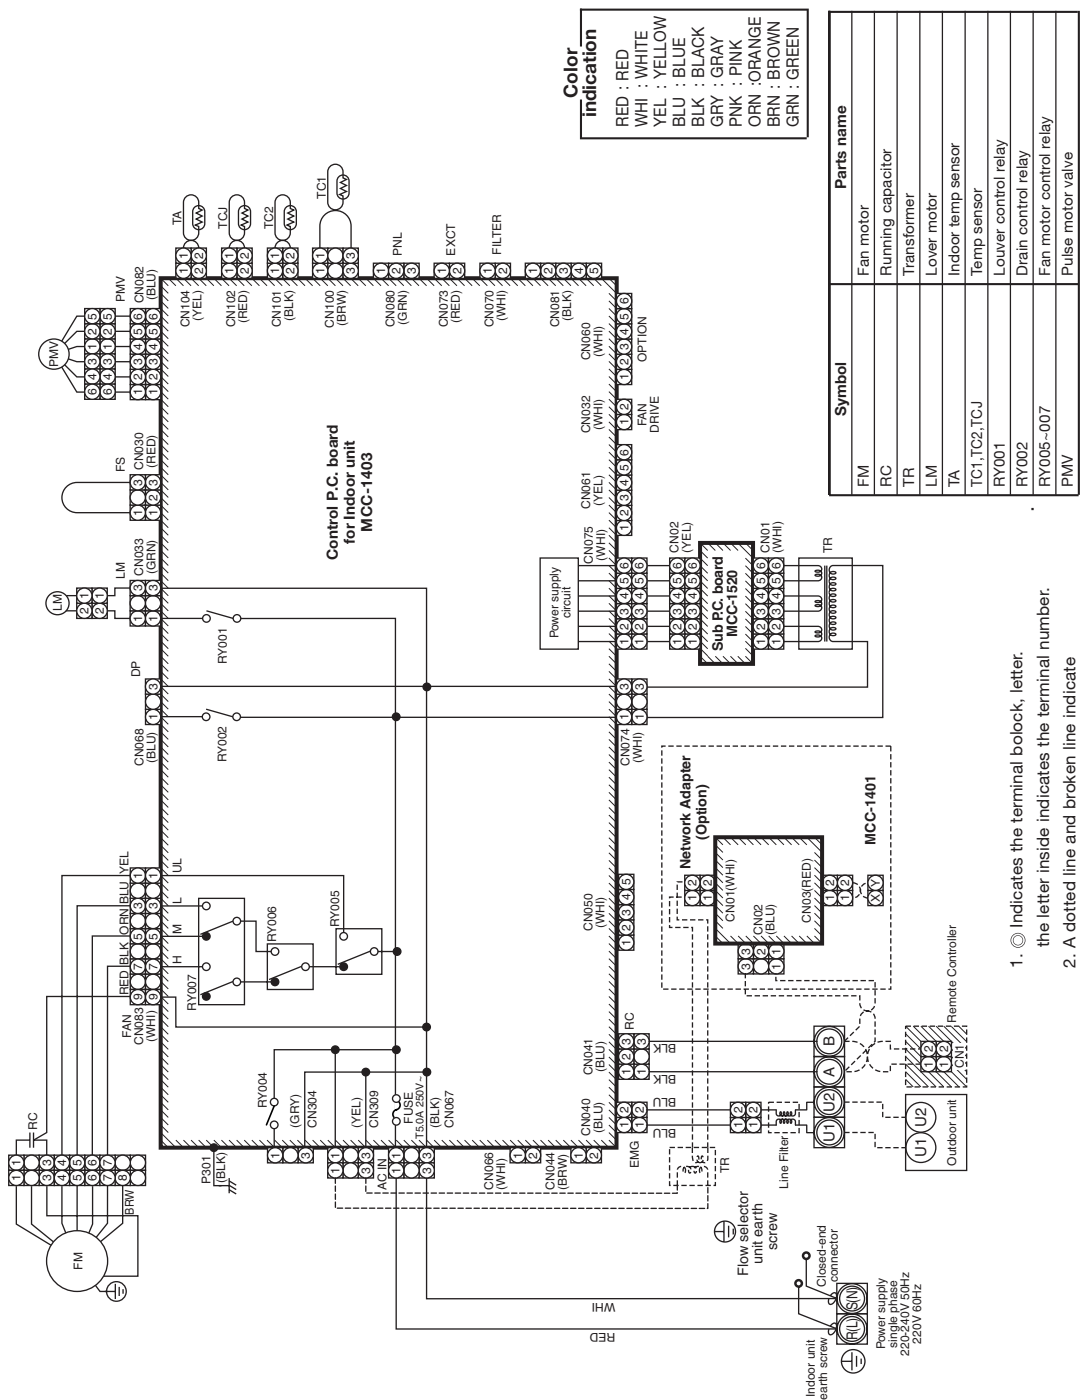

1. ◎ Indicates the terminal block, letter, the letter inside indicates the terminal number.
2. A dotted line and broken line indicate the wiring on site.
3. [Symbol] Indicates the control p.c. board.

2. Outdoor Unit

Model: MMY-MAP0501HT*, MAP0601HT*, MAP0801HT*, MAP1001HT*, MAP1201HT*

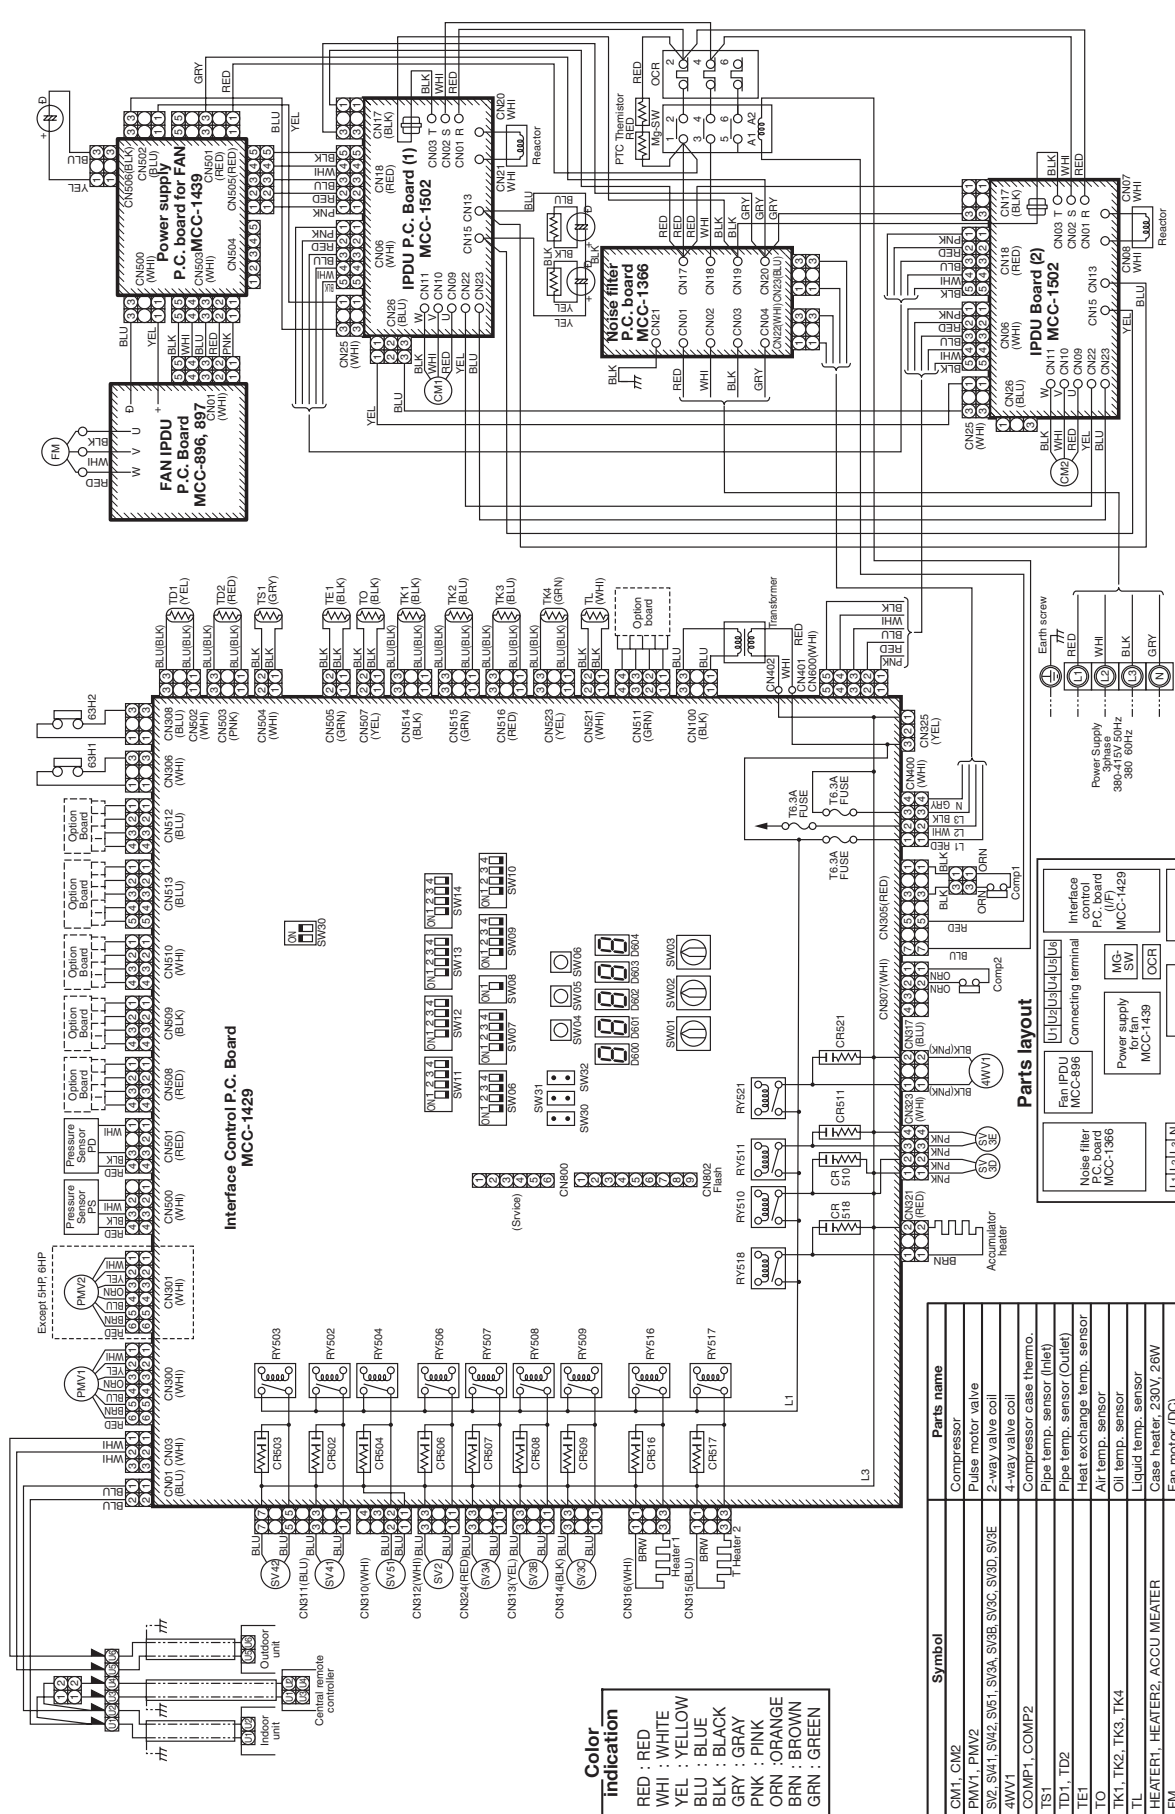


1. The two-dot chain line indicates wiring at the local site, and the dashed line indicates accessories sold separately and service cables, respectively.
 2. ○, ●, and □ indicate the terminal blocks and the numerals indicate the terminal numbers.
 3. ■ indicates P.C. board.
- *Be sure to fix the electric parts cover surely with two screws.
(Otherwise water enters into the box resulting in a trouble.)



Controls

12 Controls

1:1 Outline of application Control


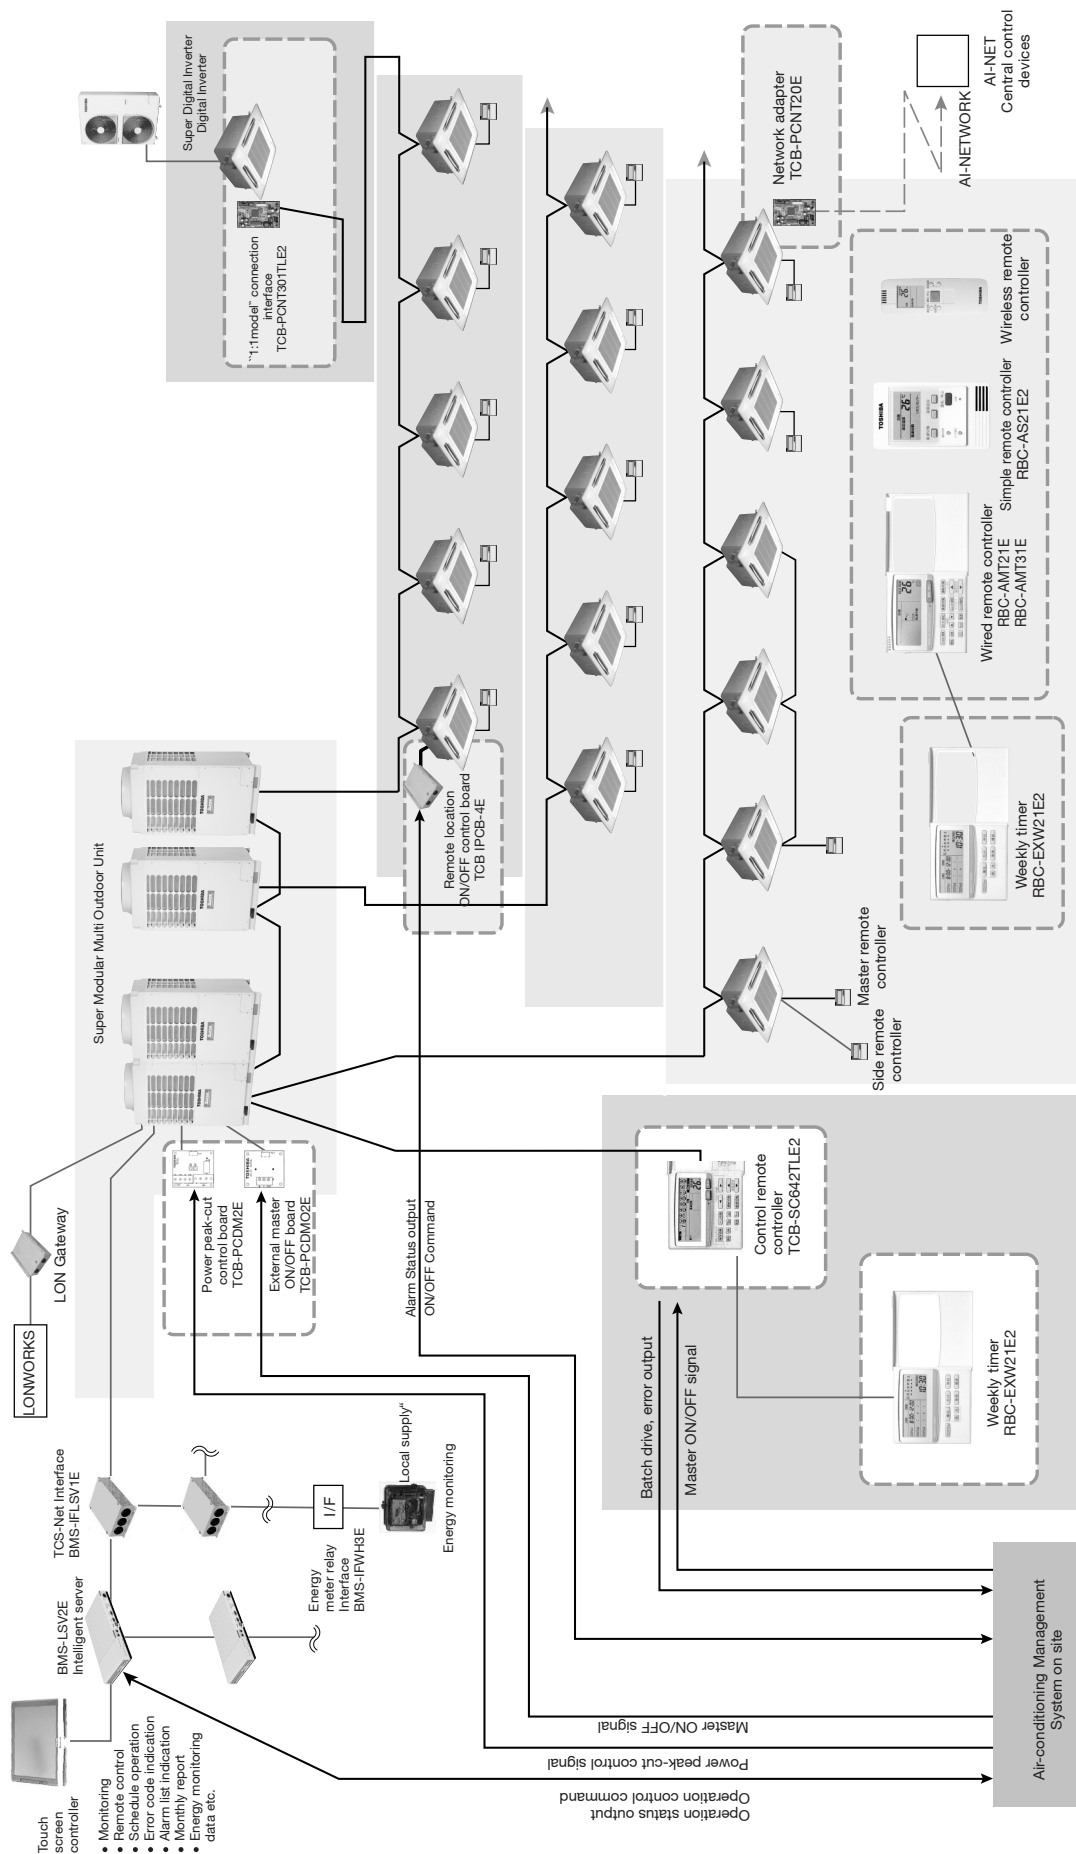


© 1 BACnet™ : ANSI/ASHRAE 135D1986, A Data Communication Protocol for Building Automation and Control Networks.
© 2 LonWorks™ : Registered trademark of Echelon Corporation

1. Applications for indoor remote controller



	Basic function	System diagram	Model
1-1	Individual control [Air conditioner is individually operated at a distance.]	Main remote controller Wireless remote controller	- Wired remote controller RBC-AMT21E RBC-AMT31E - Simple wired remote controller RBC-AS21E2 - Wireless remote controller kit TCB-AX21U(W)-E2 RBC-AX22CE2 TCB-AX21E2
1-2	GROUP control [One remote controller can control a group of up to a maximum. 8 indoor units. Operating on the same setting]		- Wired remote controller RBC-AMT21E RBC-AMT31E - Simple wired remote controller RBC-AS21E2
1-3	Two remote control [Air conditioner is controlled by two remote controllers in two locations.]	Wired system Wireless system	- Wired remote controller RBC-AMT21E RBC-AMT31E - Simple wired remote controller RBC-AS21E2 - Wireless remote controller kit TCB-AX21U(W)-E2 RBC-AX22CE2 TCB-AX21E2
1-4	Control by weekly timer [Weekly schedule operation]		- Wired remote controller RBC-AMT21E RBC-AMT31E + Weekly timer RBC-EXW21E2

2. Application controls for central remote controller

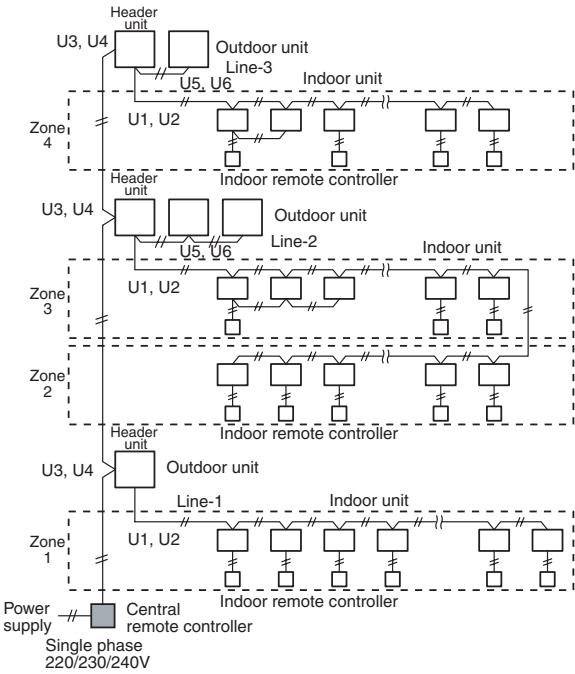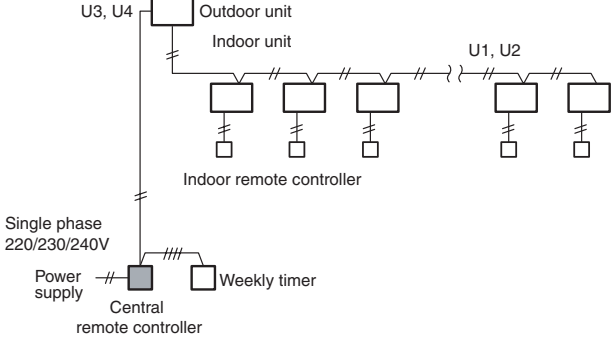
	Basic function	System diagram	Model
2-1	Central management controller for 64 units	 Function of central remote controller - Individual control for up to 64 indoor units - Individual control for max. 64 indoor units divided in to 4 zones. (Up to 16 indoor units for each zone.) - Up to 16 outdoor header units are connectable. 4 specific central control settings to restrict individual operation by remote controller are selectable. - Different settings for 1 to 4 zones. - Usable with other central control devices (Up to 10 central control devices in one control circuit) - Two selectable control modes Central controller mode/Remote controller mode - Setting of simultaneous ON/OFF 3 times per day of the week combined with weekly timer.	- Central remote controller TCB-SC642TLE2 <Indoor remote controller> - Wired remote controller RBC-AMT21E RBC-AMT31E - Simple wired remote controller RBC-AS21E2
2-2	Central remote controller + Weekly timer [Weekly operation schedule can be set by connecting a weekly timer to the central remote controller]		- Central remote controller TCB-SC642TLE2 + Weekly timer RBC-EXW21E2 Indoor remote controller - Wired remote controller RBC-AMT21E RBC-AMT31E - or Simple wired remote controller RBC-AS21E2


	Basic function	System diagram	Model
2-3	Either one of the two controllers can be set as side control. without indoor remote controller	U3, U4 Outdoor unit Power supply Single phase 220/230/240V Central remote controller U1, U2 Indoor unit (Even when grouping operation is performed by connecting multiple indoor units to 1 line, the indoor remote controller is required.) Example of grouping operation U3, U4 Outdoor unit Power supply Single phase 220/230/240V Central remote controller U1, U2 Indoor unit (Group) Indoor remote controller is required Available U3, U4 Outdoor unit Power supply Single phase 220/230/240V Central remote controller U1, U2 Indoor unit (Group) Available	- Central remote controller TCB-SC642TLE2 - Indoor remote controller - Wired remote controller RBC-AMT21E RBC-AMT31E
2-4	Central management control with "1 : 1 model"	Power supply Central remote controller U3, U4 Header unit Super MMS U1, U2 Indoor unit Indoor remote controller "1:1 model" connection interface * 1 * TOSHIBA Digital Inverter System and Super Digital Inverter System	- Central remote controller TCB-SC642TLE2 TCB-CC163TLE2 "1 : 1 model" connection interface TCB-PCNT30TLE2 (RAV-SM560KRT-E, SM800KRT-E are not compatible to connect) - Indoor remote controller - Wired remote controller RBC-AMT21E RBC-AMT31E - Simple wired remote controller RBC-AS21E2

3. Application control for network

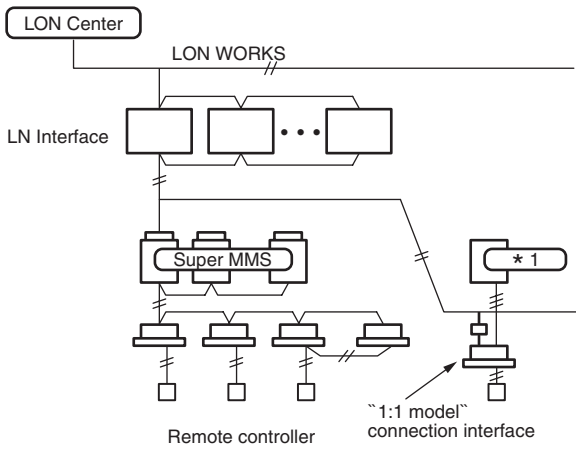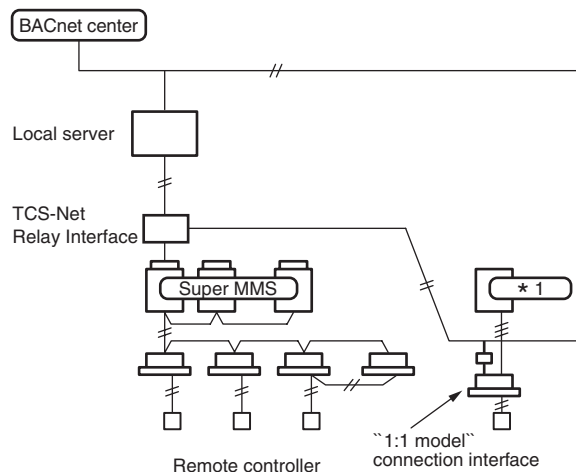	Basic function	System diagram	Model
3-1-1	LONWORKS	 *1 TOSHIBA Digital Inverter System and Super Digital Inverter System The LONWORKS interface should be connected between a building management computer and a Super MMS air conditioning system.	• LN interface TCB-IFLN640TLE • “1 : 1 model” connection interface TCB-PCNT30TLE2 [RAV-SM560KRT-E, SM800KRT-E are not compatible to connect] Indoor remote controller • Wired remote controller RBC-AMT21E RBC-AMT31E or • Simple wired remote controller RBC-AS21E2
3-1-2	BACnet	 *1 TOSHIBA Digital Inverter System and Super Digital Inverter System The local server should be connected to the BACnet network, and the Super MMS air conditioning system through the interface.	• BACnet local server BMS-LSV2E • TCS-Net Relay Interface BMS-IFLSV1E • “1 : 1 model” connection interface TCB-PCNT30TLE2 [RAV-SM560KRT-E, SM800KRT-E are not compatible to connect] Indoor remote controller • Wired remote controller RBC-AMT21E RBC-AMT31E • Simple wired remote controller RBC-AS21E2




Touch screen controller system

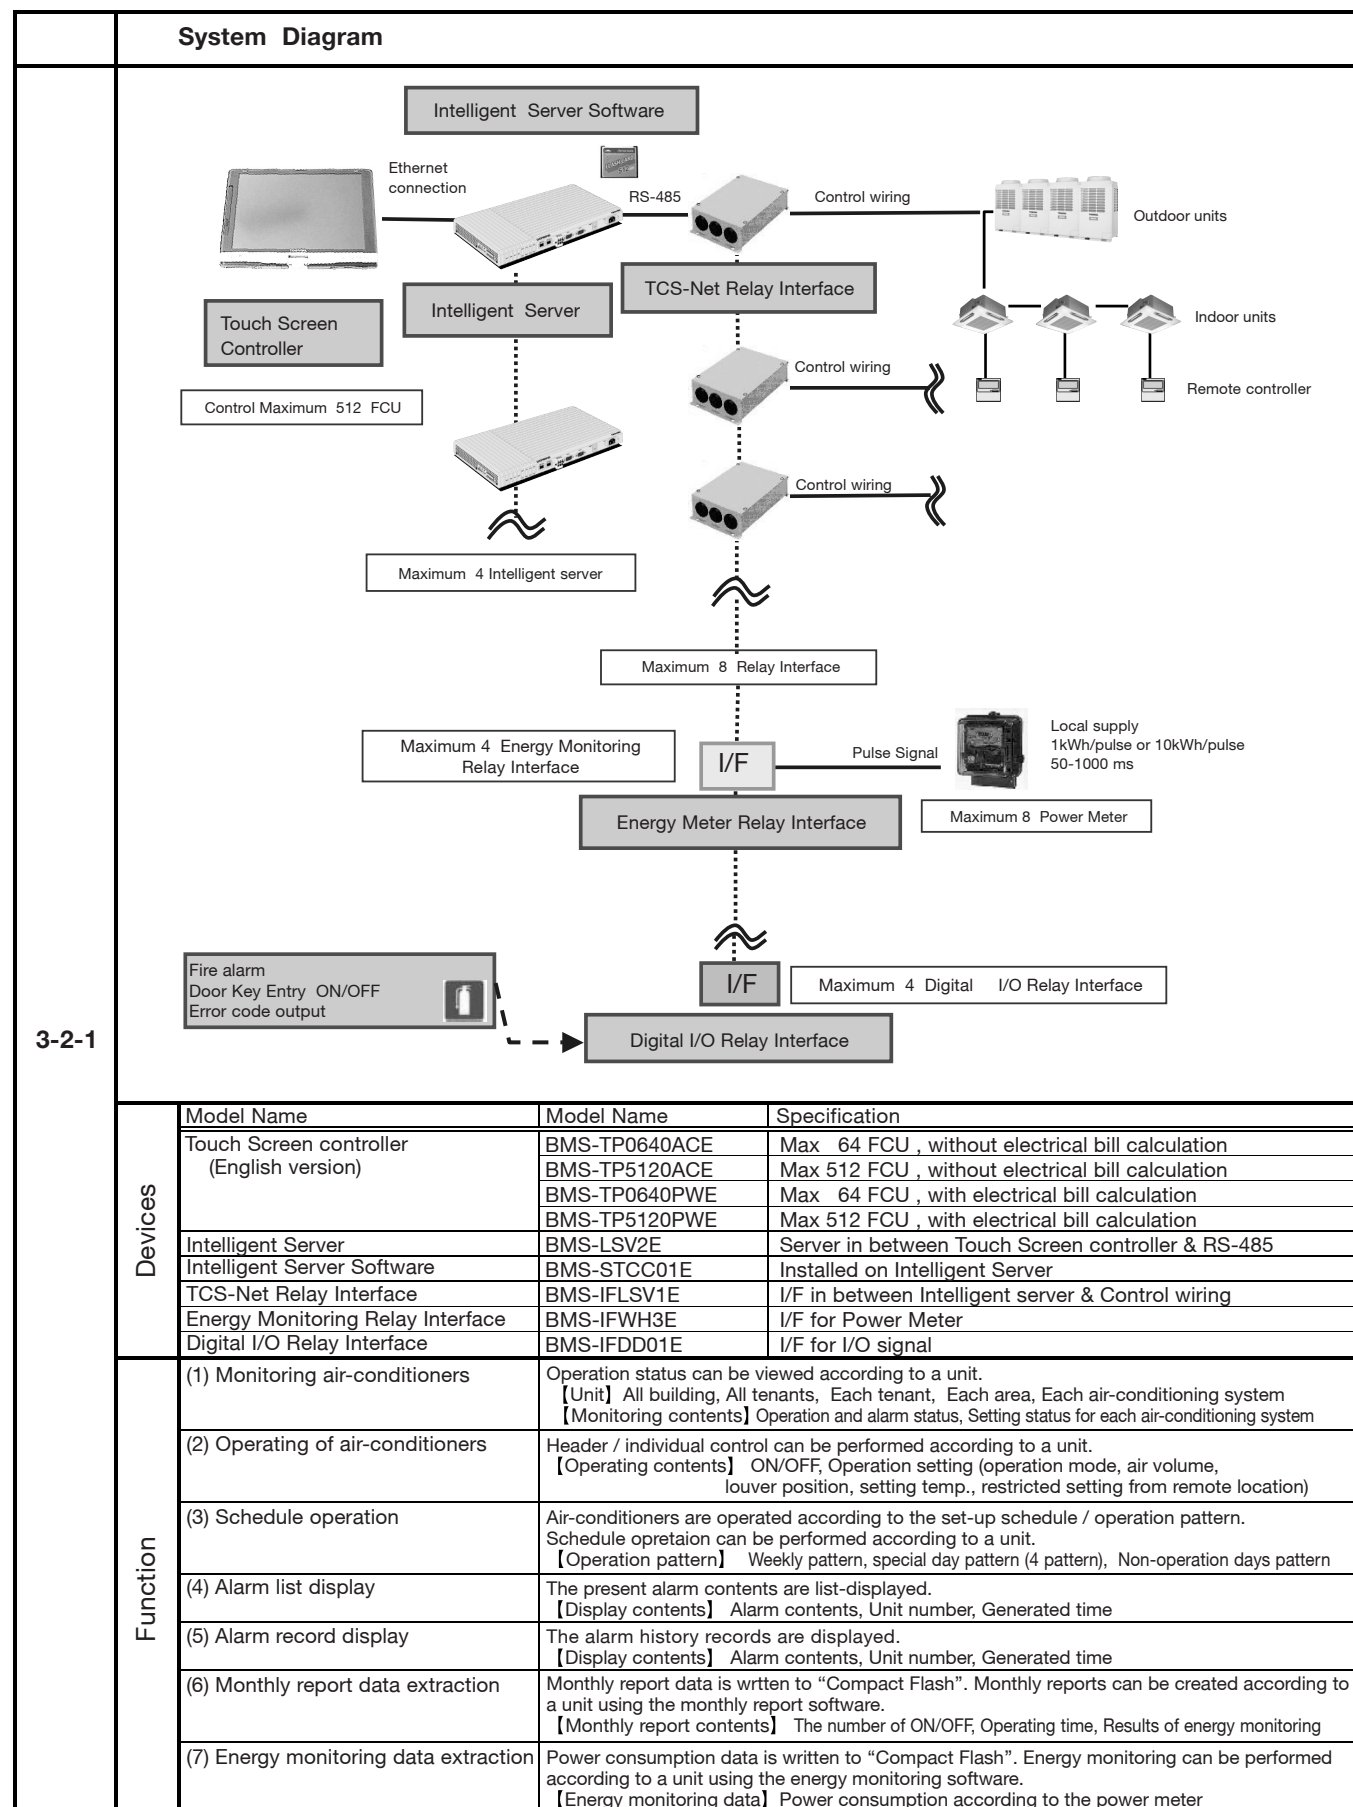



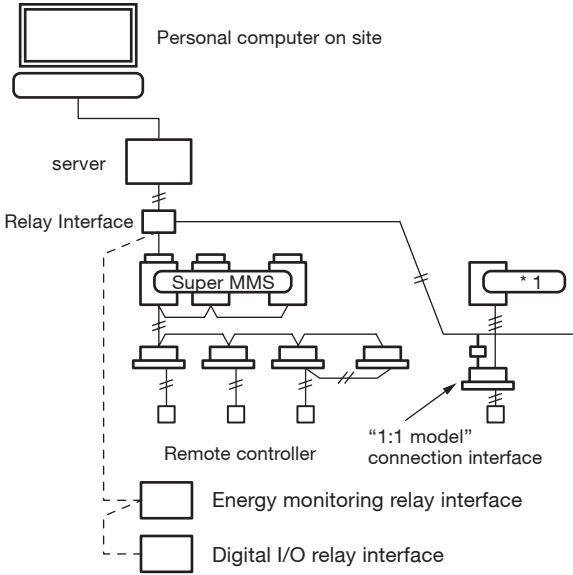
	Basic function	System diagram	Model
3-2-2	Windows based central controller (Now planning)	 Personal computer on site server Relay Interface Super MMS Remote controller "1:1 model" connection interface *1 Energy monitoring relay interface Digital I/O relay interface *1 TOSHIBA Digital Inverter System and Super Digital Inverter System	

Application control of optional devices connectable to indoor units





[1] Remote location ON/OFF control box

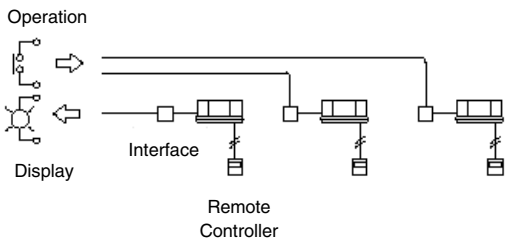Model Name	Appearance	Features
TCB-IFCB-4E		Start and stop of the air conditioner is possible by a external signal and indication of operation/alarm externally.
	Application	Function
	 Operation Display Interface Remote Controller	- Monitoring - ON/OFF status (for indoor unit) - Alarm status (system & indoor unit stop) - ON/OFF command - Air conditioner can be turned ON/OFF by external signals. - The external ON/OFF signals will initiate the signals shown below.  ON /OFF Non-voltage COM ON /OFF continuous signal




[2] Network adapter














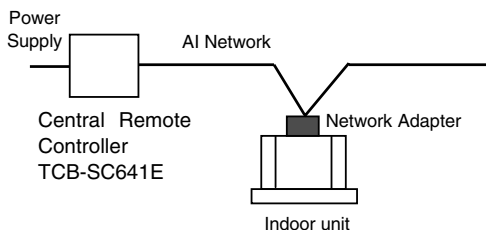
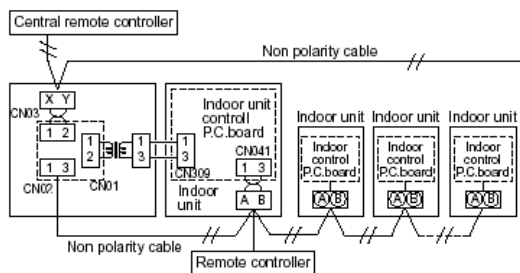
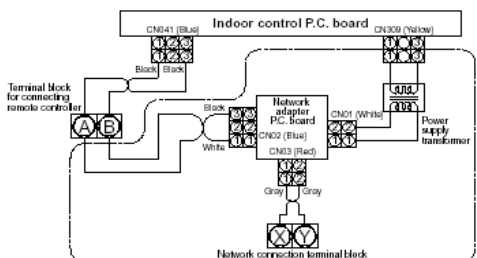
Model Name	Appearance	Features
TCB-PCNT20E		- Indoor units of Super MMS system are controlled by AI-NETWORK central remote controller. - Connectable indoor units per group.
	Application	Connection of cables
	Install optional P.C. board in Electrical parts box of indoor unit.  Power Supply AI Network Central Remote Controller TCB-SC641E Network Adapter Indoor unit	 Central remote controller Non polarity cable Indoor unit control P.C. board Indoor unit Indoor unit Indoor unit Indoor unit Remote controller
	Wiring diagram of indoor P.C. board	
	 Indoor control P.C. board Terminal block for connecting remote controller Network adapter P.C. board Power supply transformer Network connection terminal block	





[3] “1:1 model” connection interface

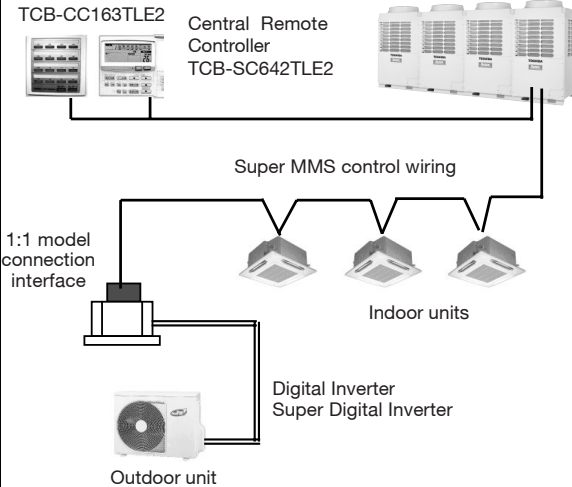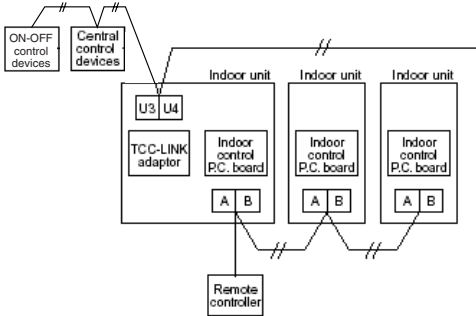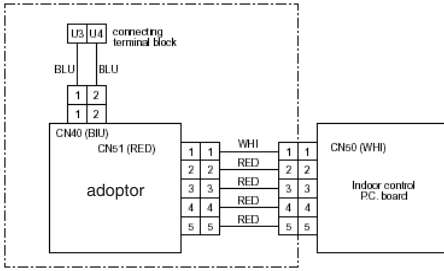Model Name	Appearance	Features
TCB-PCNT30TLE2	 Install optional P.C. board in Electrical parts box of indoor unit.	● Link adapter for “1:1 model” into super modular multi network 1:1 model : Super digital inverter Digital inverter
	Application  TCB-CC163TLE2 Central Remote Controller TCB-SC642TLE2 Super MMS control wiring 1:1 model connection interface Indoor units Digital Inverter Super Digital Inverter Outdoor unit	Connection of cables  Wiring diagram of indoor P.C. board 

Application controls by optional P.C. board of outdoor unit

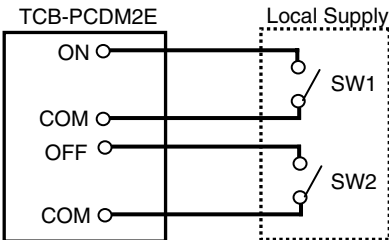Model Name	Appearance	Function																																								
TCB-PCDM2E	 Size : 71 x 85	[1] Power peak-cut Control Feature The upper limit capacity of the outdoor unit is restricted based on the power peak cut request signal from outside. Function Two types of control can be selected by setting SW07 on the interface P.C. board on the header outdoor unit.																																								
	Application 	 [Standard function] SW07-2 OFF <table><tr><th colspan="2">Input</th><th colspan="2">SW07-1</th></tr><tr><th>SW01</th><th>SW02</th><th>OFF</th><th>ON</th></tr><tr><td>ON</td><td>OFF</td><td>0% (stop)</td><td>Up to 60%</td></tr><tr><td>OFF</td><td>ON</td><td>100%(Normal)</td><td>100%(Normal)</td></tr></table> [Expansion function] SW07-2 ON <table><tr><th colspan="2">Input</th><th colspan="2">SW07-1</th></tr><tr><th>SW01</th><th>SW02</th><th>OFF</th><th>ON</th></tr><tr><td>OFF</td><td>OFF</td><td>100%(Normal)</td><td>100%(Normal)</td></tr><tr><td>ON</td><td>OFF</td><td>Up to 80%</td><td>Up to 85%</td></tr><tr><td>OFF</td><td>ON</td><td>Up to 60%</td><td>Up to 75%</td></tr><tr><td>ON</td><td>ON</td><td>0%(stop)</td><td>Up to 60%</td></tr></table> • Ensure terminal contacts are securely fixed. • Do not turn on both SW1 and SW2 terminals simultaneously.	Input		SW07-1		SW01	SW02	OFF	ON	ON	OFF	0% (stop)	Up to 60%	OFF	ON	100%(Normal)	100%(Normal)	Input		SW07-1		SW01	SW02	OFF	ON	OFF	OFF	100%(Normal)	100%(Normal)	ON	OFF	Up to 80%	Up to 85%	OFF	ON	Up to 60%	Up to 75%	ON	ON	0%(stop)	Up to 60%
	Input		SW07-1																																							
SW01	SW02	OFF	ON																																							
ON	OFF	0% (stop)	Up to 60%																																							
OFF	ON	100%(Normal)	100%(Normal)																																							
Input		SW07-1																																								
SW01	SW02	OFF	ON																																							
OFF	OFF	100%(Normal)	100%(Normal)																																							
ON	OFF	Up to 80%	Up to 85%																																							
OFF	ON	Up to 60%	Up to 75%																																							
ON	ON	0%(stop)	Up to 60%																																							
	*Install this optional P.C. board in the inverter assembly of the header outdoor unit.																																									

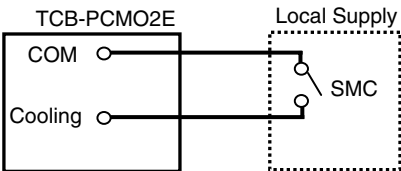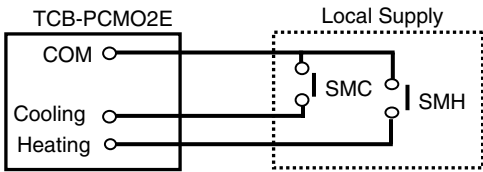
Model Name	Appearance	Function									
TCB-PCMO2E	 Size : 55.5 x 60 Application	[2] Snowfall fan control ● Feature Outdoor fan is operated by a snowfall signal from outside. ● Function  SMC : Cooling mode select input (switch) <table border="1"><thead><tr><th>Terminal</th><th>Input signal</th><th>Operation</th></tr></thead><tbody><tr><td rowspan="2">SMC</td><td> OFF</td><td>Snowfall fan control (Operates outdoor fan.)</td></tr><tr><td>ON </td><td>Usual operation</td></tr></tbody></table> This control is activated when a input signal increases or decreases. (The increasing or decreasing signal needs to be held for a minimum of 100m/sec in order to activate the control).	Terminal	Input signal	Operation	SMC	 OFF	Snowfall fan control (Operates outdoor fan.)	ON 	Usual operation	
	Terminal	Input signal	Operation								
SMC	 OFF	Snowfall fan control (Operates outdoor fan.)									
	ON 	Usual operation									
	 *Install this optional P.C. board in the inverter assembly of the header outdoor unit.	[3] External master ON/OFF control ● Feature The outdoor unit starts or stops the system. ● Function  SMC : Input signal for start SMH : Input signal for stop <table border="1"><thead><tr><th>Terminal</th><th>Input signal</th><th>Operation</th></tr></thead><tbody><tr><td>SMC</td><td>ON  OFF</td><td>Starts all indoor units.</td></tr><tr><td>SMH</td><td>ON  OFF</td><td>Stops all indoor units.</td></tr></tbody></table> • Ensure terminal contacts are securely fixed. This control is activated when a input signal increases or decreases. (The increasing or decreasing signal needs to be held for a minimum of 100m/sec in order to activate the control).	Terminal	Input signal	Operation	SMC	ON  OFF	Starts all indoor units.	SMH	ON  OFF	Stops all indoor units.
Terminal	Input signal	Operation									
SMC	ON  OFF	Starts all indoor units.									
SMH	ON  OFF	Stops all indoor units.									

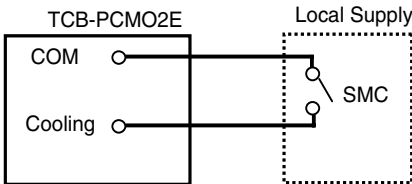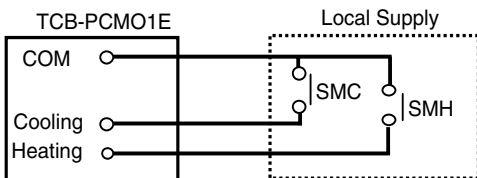Model Name	Appearance	Function									
TCB-PCM02E	 Size : 55.5 x 60	[4] Night operation (Sound reduction) control ● Feature Sound level can be reduced by restricting the compressor and fan speeds. ● Function  SMC : Cooling mode designated input switch <table border="1"><thead><tr><th>Terminal</th><th>Input signal</th><th>Operation</th></tr></thead><tbody><tr><td rowspan="2">SMC</td><td>ON </td><td>Night operation control</td></tr><tr><td>OFF </td><td>Usual operation</td></tr></tbody></table> This control is activated when a input signal increases or decreases. (The increasing or decreasing signal needs to held for a minimum of 100m/sec in order to activate the control).	Terminal	Input signal	Operation	SMC	ON 	Night operation control	OFF 	Usual operation	
	Terminal	Input signal	Operation								
SMC	ON 	Night operation control									
	OFF 	Usual operation									
	 *Install this optional P.C. board in the inverter assembly of the header outdoor unit.	[5] Operation mode selection control ● Feature This control can restrict the selectable operation mode. ● Function  SMC : Cooling mode designated input switch SMH : Heating mode designated input switch <table border="1"><thead><tr><th>SMC</th><th>SMH</th><th>Selected operation mode</th></tr></thead><tbody><tr><td>ON</td><td>OFF</td><td>Only cooling mode permitted</td></tr><tr><td>OFF</td><td>ON</td><td>Only heating mode permitted</td></tr></tbody></table> Ensure terminal contacts are securely fixed.	SMC	SMH	Selected operation mode	ON	OFF	Only cooling mode permitted	OFF	ON	Only heating mode permitted
SMC	SMH	Selected operation mode									
ON	OFF	Only cooling mode permitted									
OFF	ON	Only heating mode permitted									


Remote controller

- Wired remote controller

RBC-AMT31E

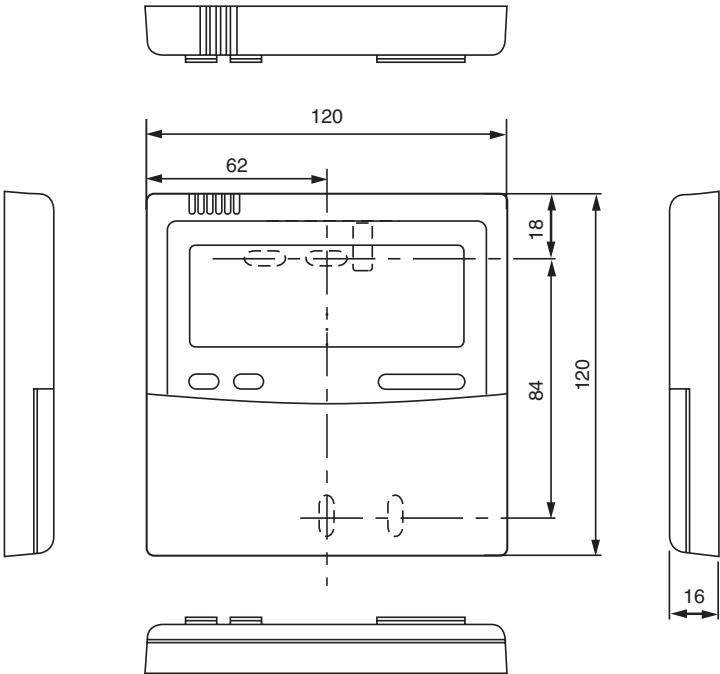


RBC-AMT21E

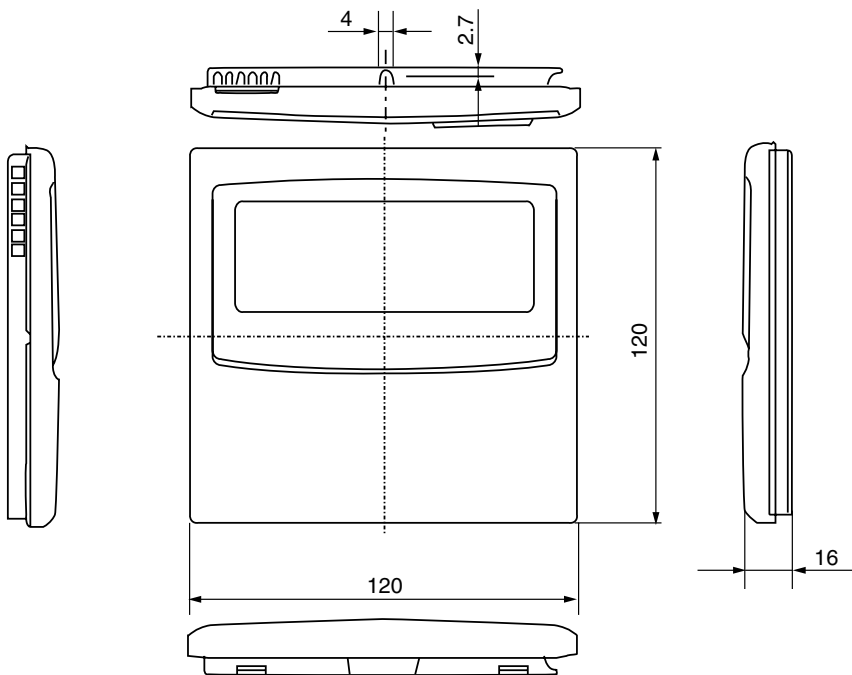


- Simple wired remote controller

RBC-AS21E / RBC-AS21E2

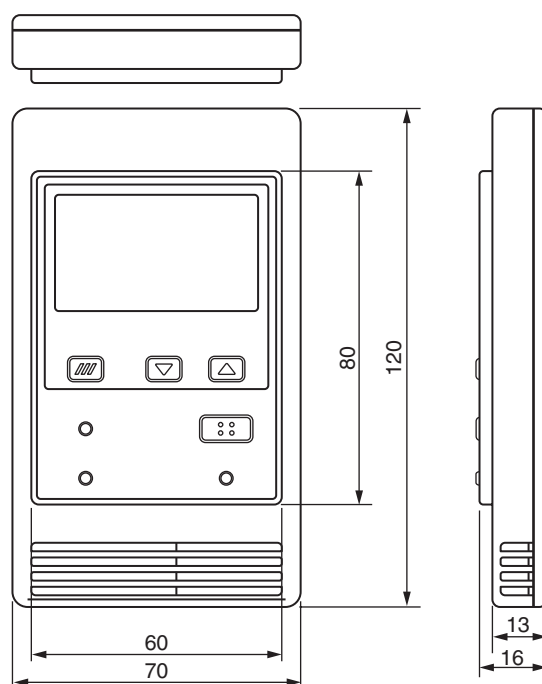


- **Wireless remote controller**

TCB-AX21U (W)-E / TCB-AX21U (W)-E2

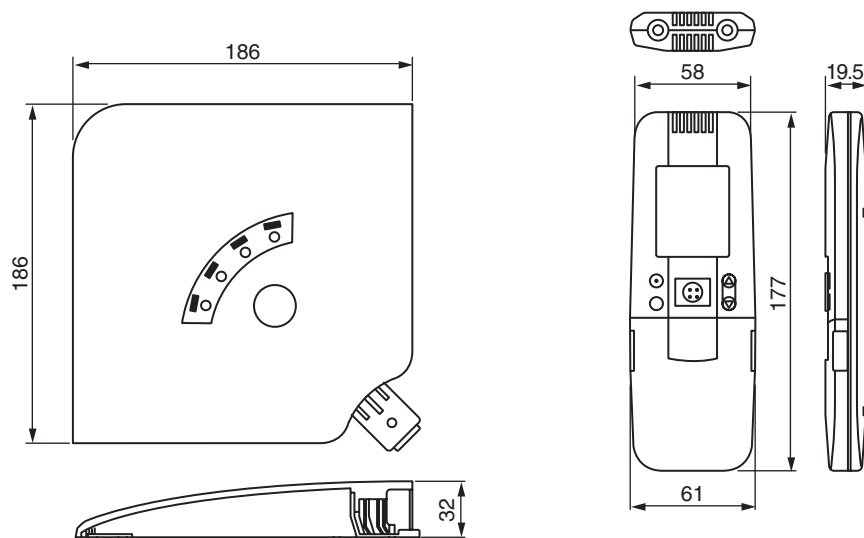


- **Wireless remote controller kit**

RBC-AX22CE / RBC-AX22CE2

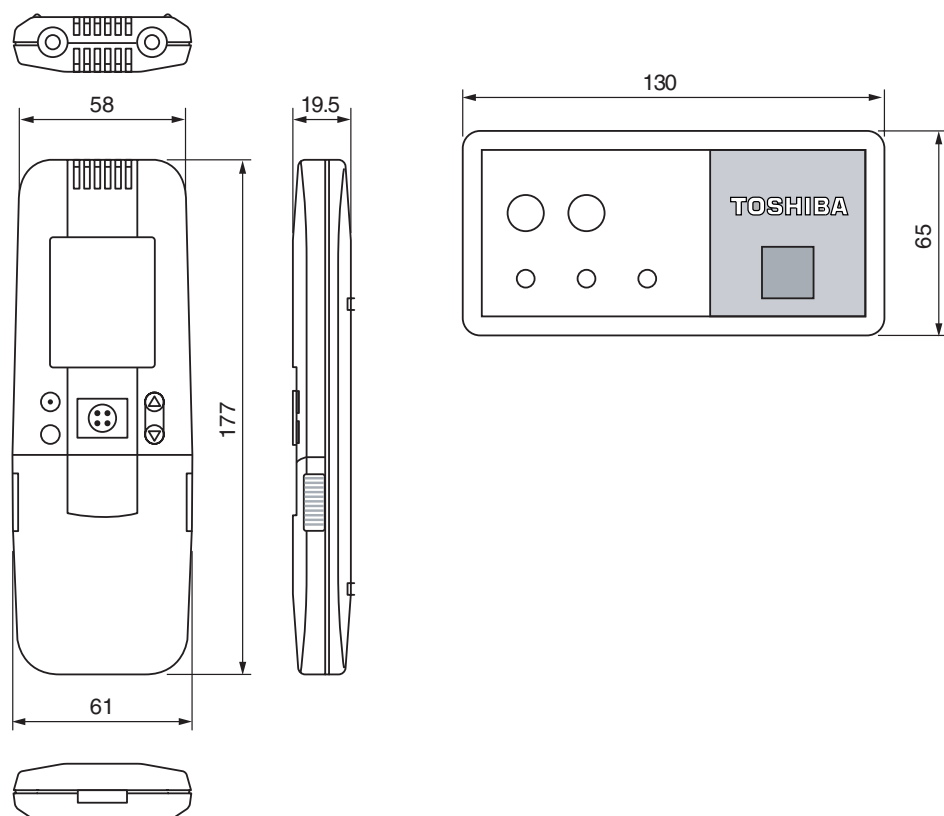


• Wireless remote controller kit

TCB-AX21E / TCB-AX21E2

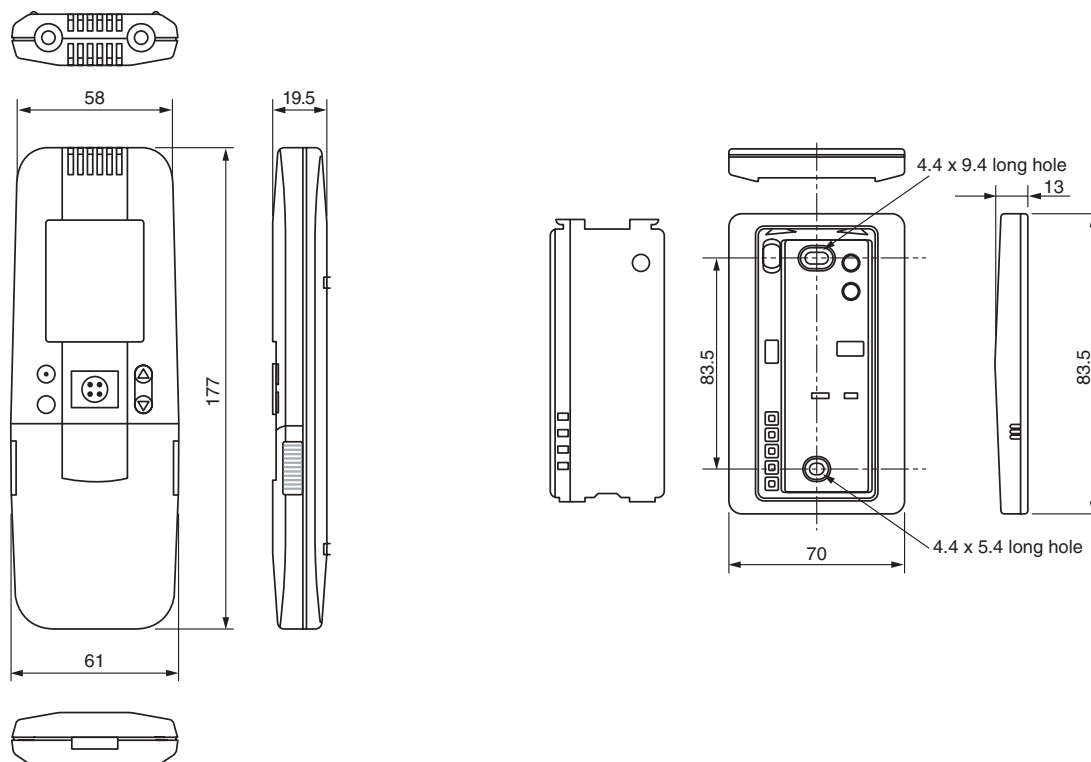


• Weekly timer

RBC-EXW21E / RBC-EXW21E2

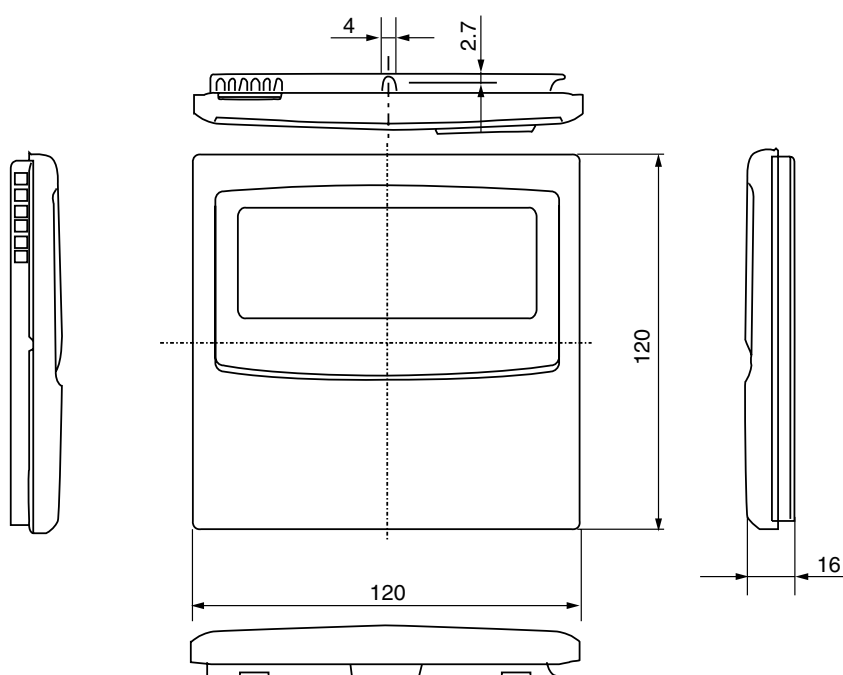


- Remote sensor

TCB-TC21LE / TCB-TC21LE2

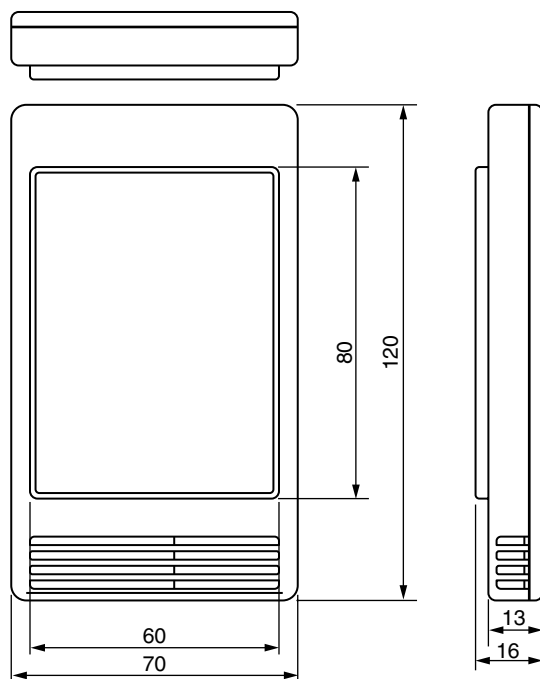

- Central remote controller


TCB-SC642TLE / TCB-SC642TLE2

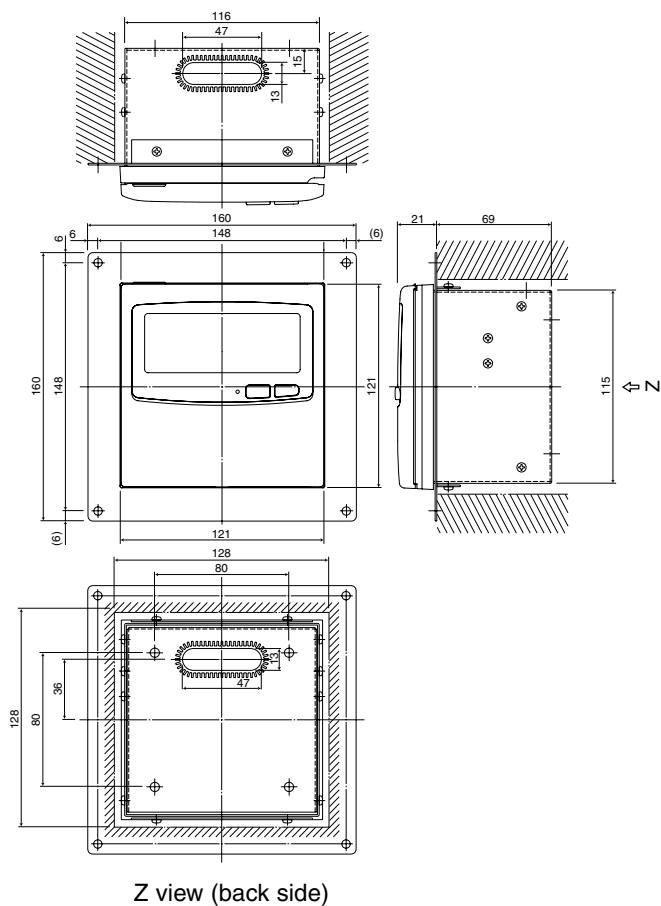


Z view (back side)

•ON-OFF controller

TCB-CC163TLE2

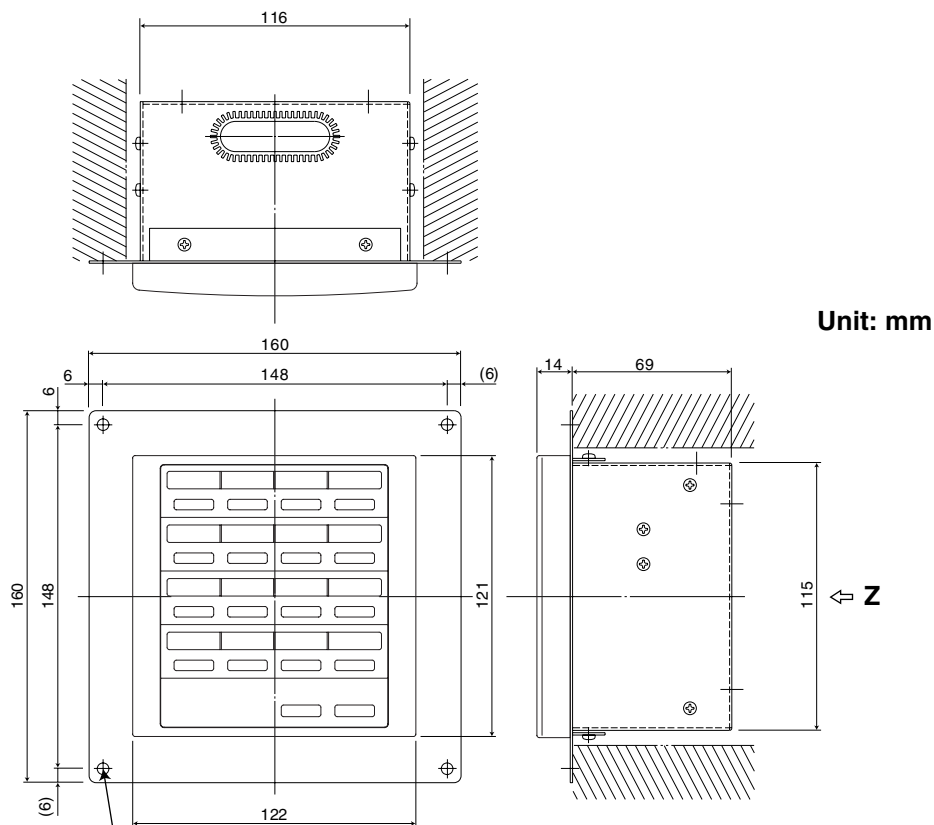


4- ϕ 5 diameter holes
(for mounting)

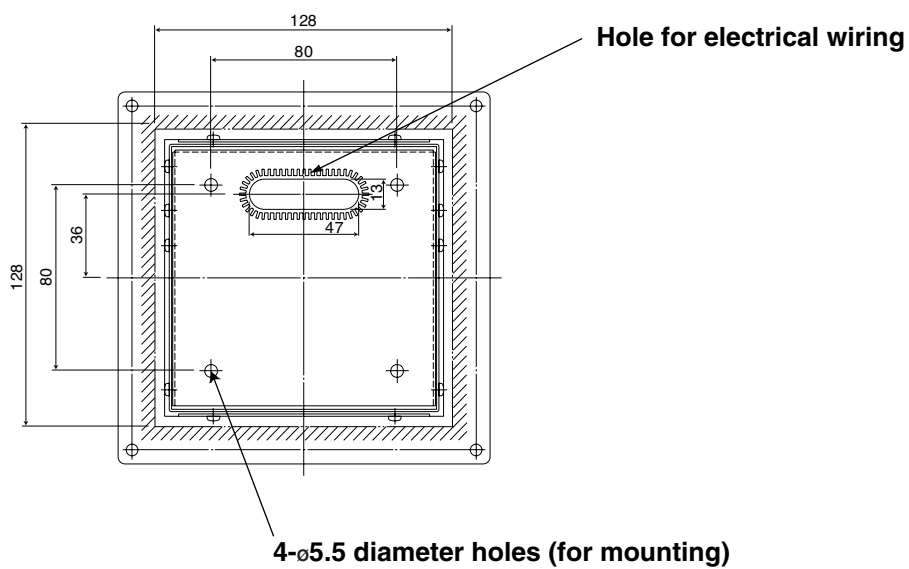

Z-view (back side)


•TCS-Net relay interface

BMS-IFLSV1E

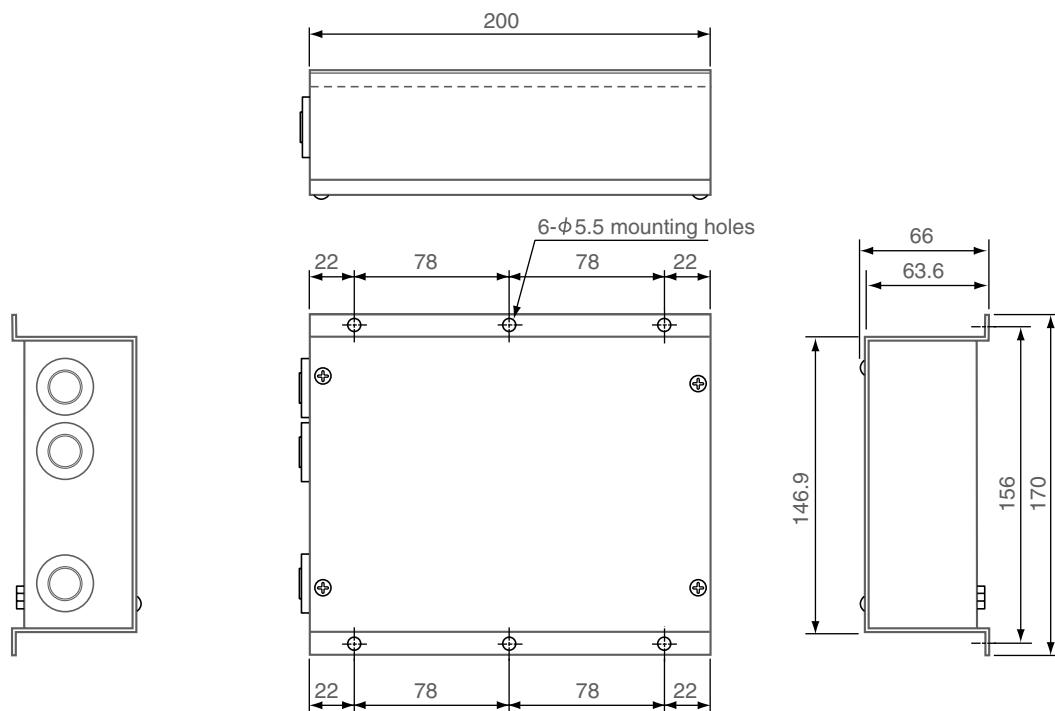


•Touch screen controller


BMS-TP0640ACE BMS-TP5120ACE BMS-TP0640PWE BMS-TP5120PWE

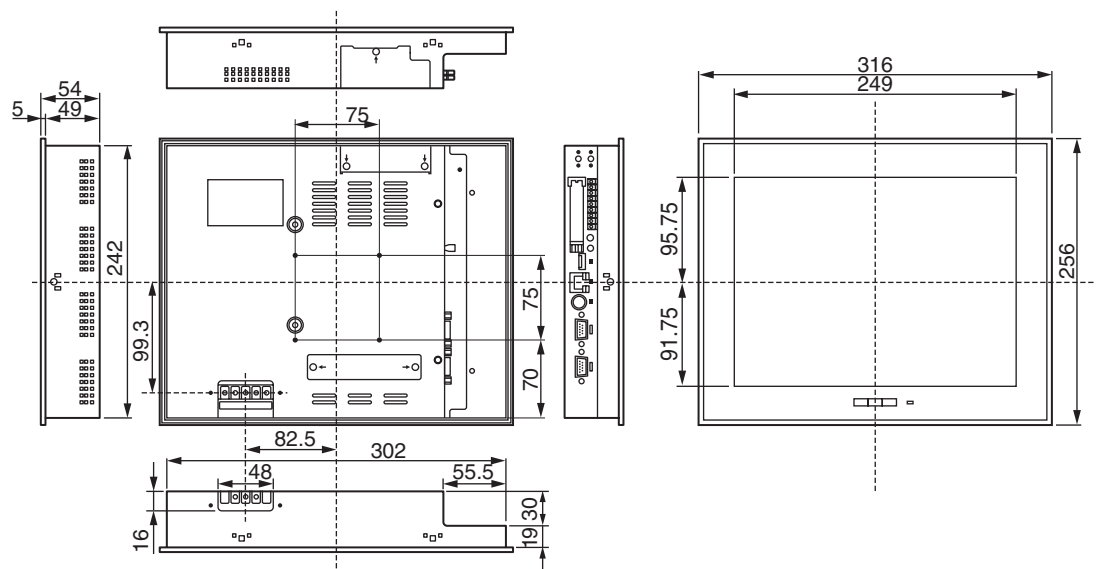

• Intelligent server

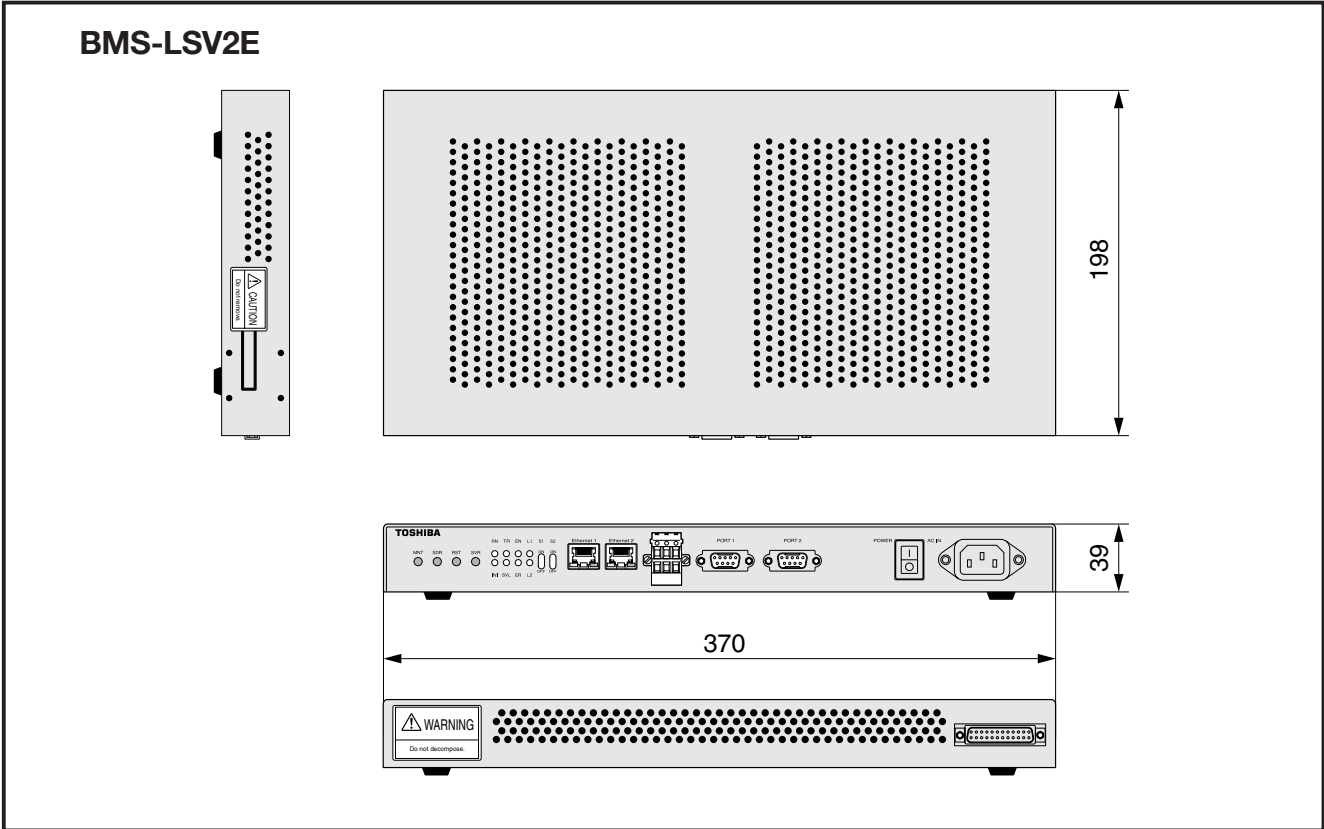


• Energy monitoring relay interface / Digital I/O relay interface

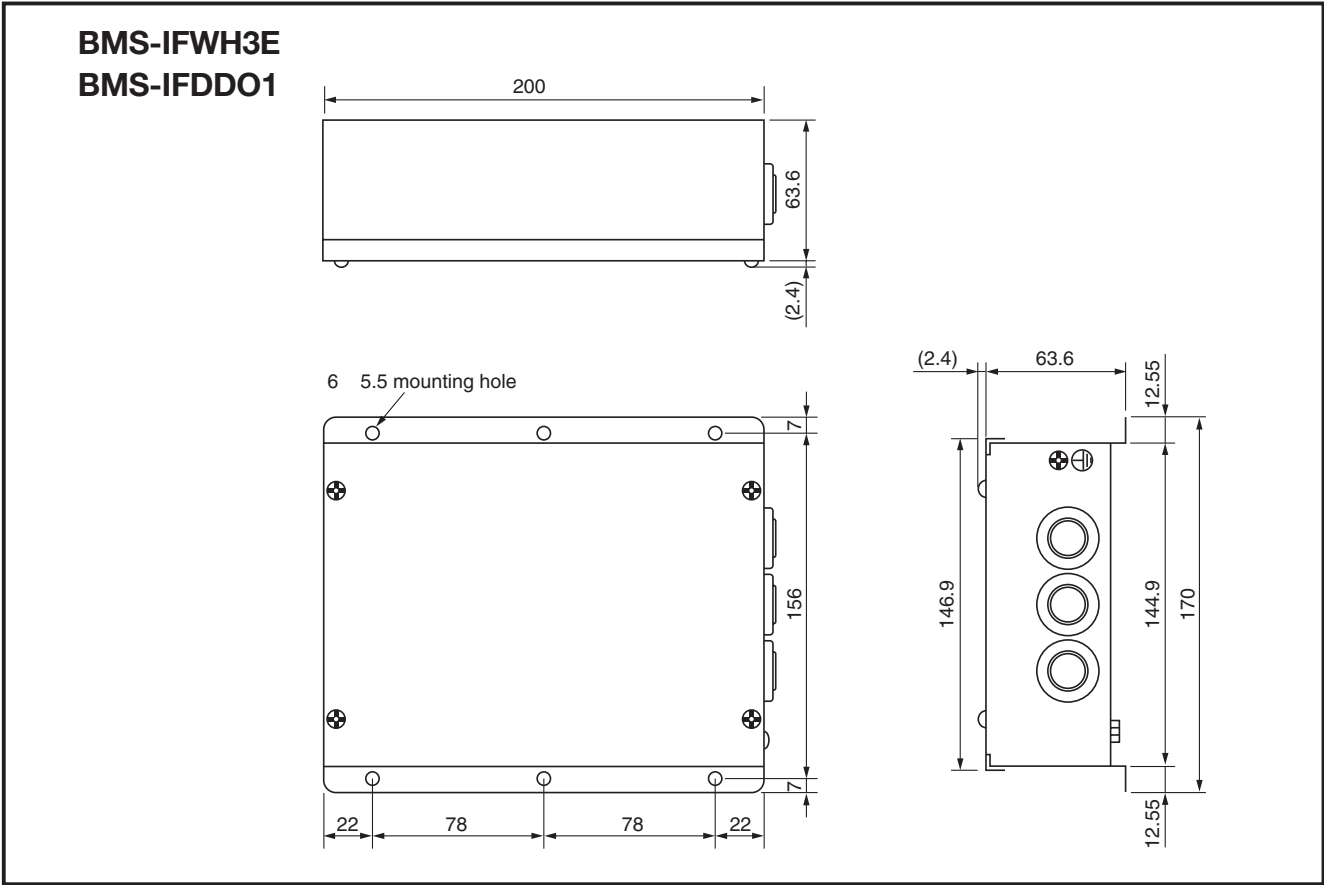


Dimension


TCB-PCDM2E

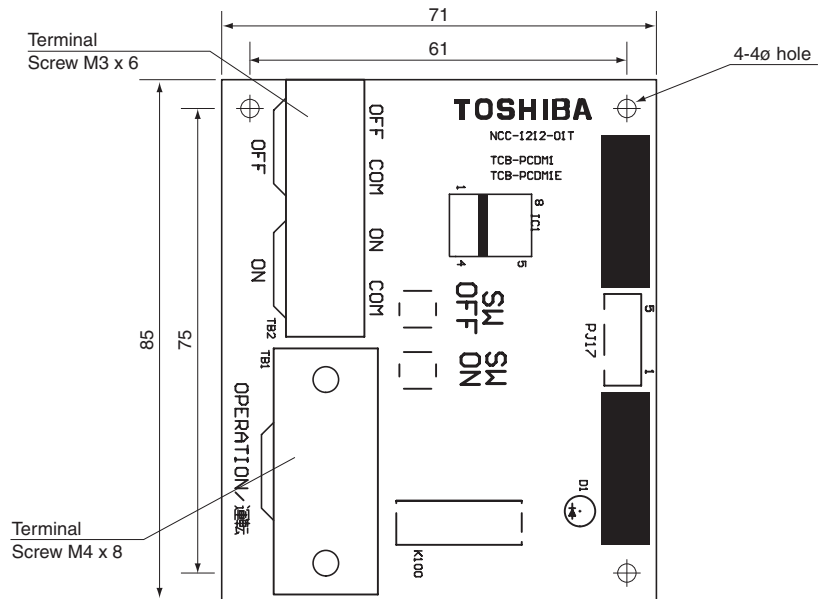

TCB-PCMO2E

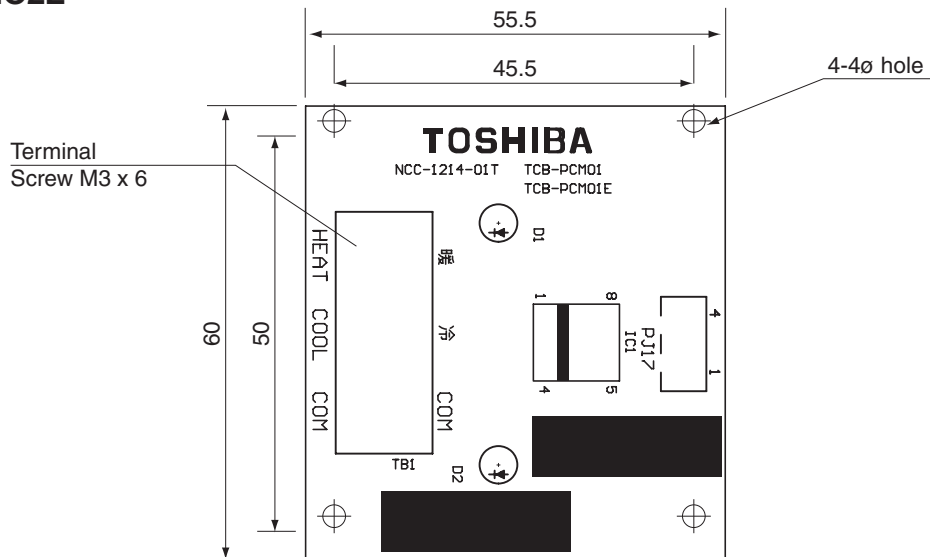

TCB-PCIN2E

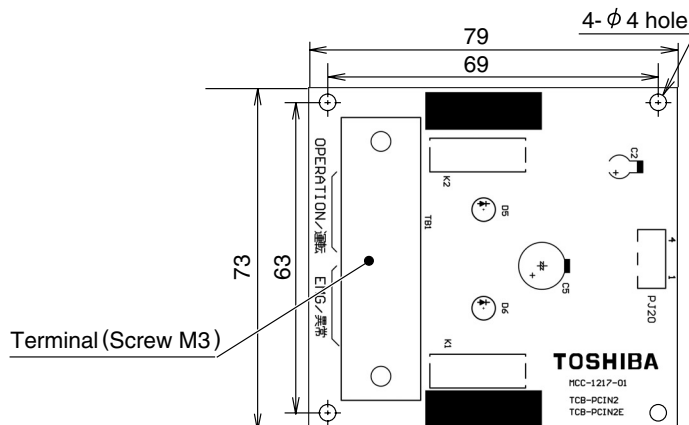




13

Fan characteristics


13 Fan characteristics

A


MMD-AP0071BH, AP0091BH

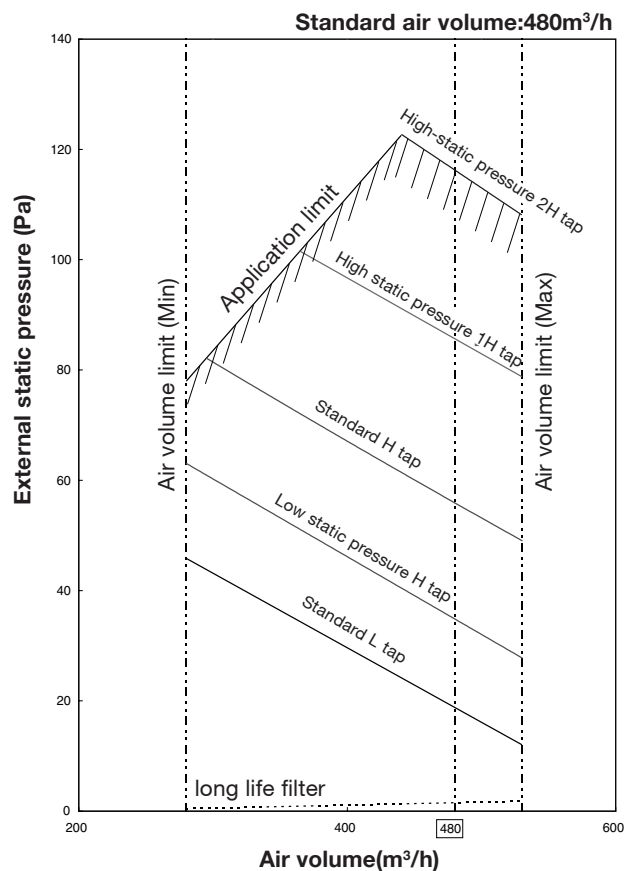


MMD-AP0121BH

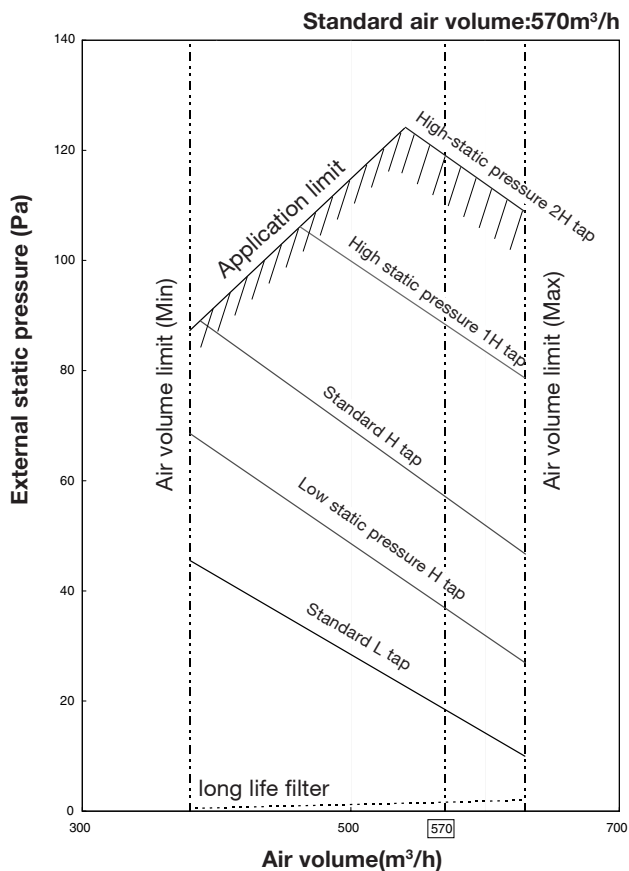


MMD-AP0151BH

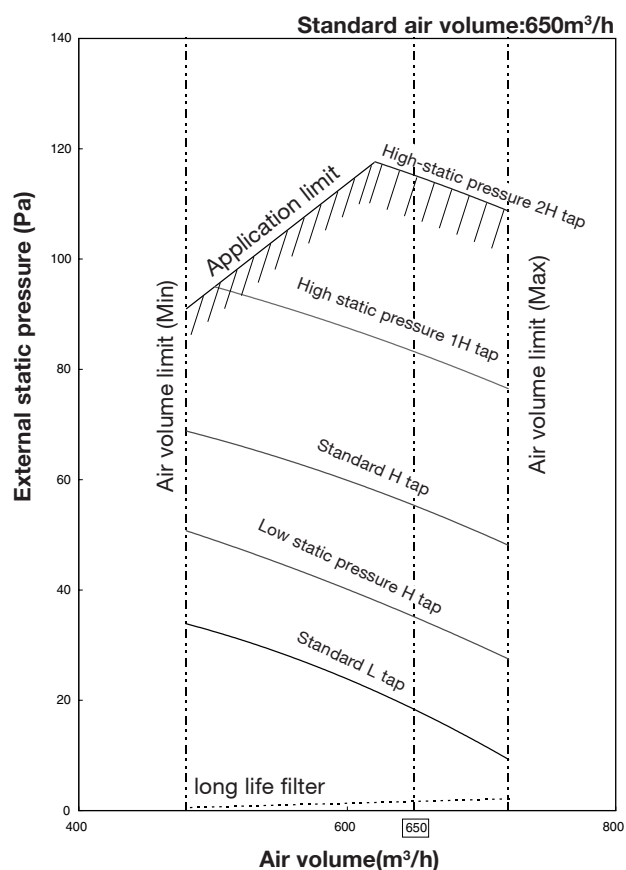


MMD-AP0181BH

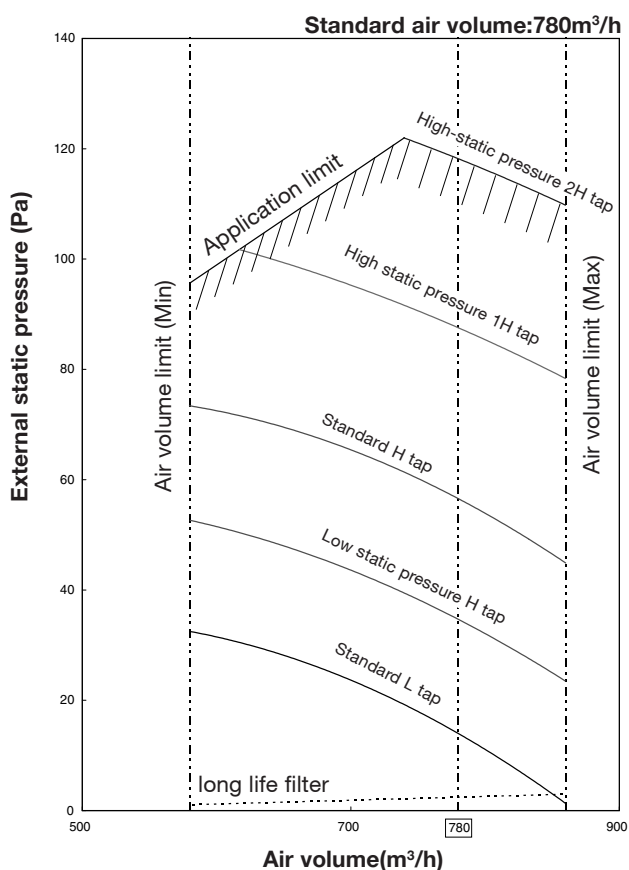


MMD-AP0241BH, AP0271BH

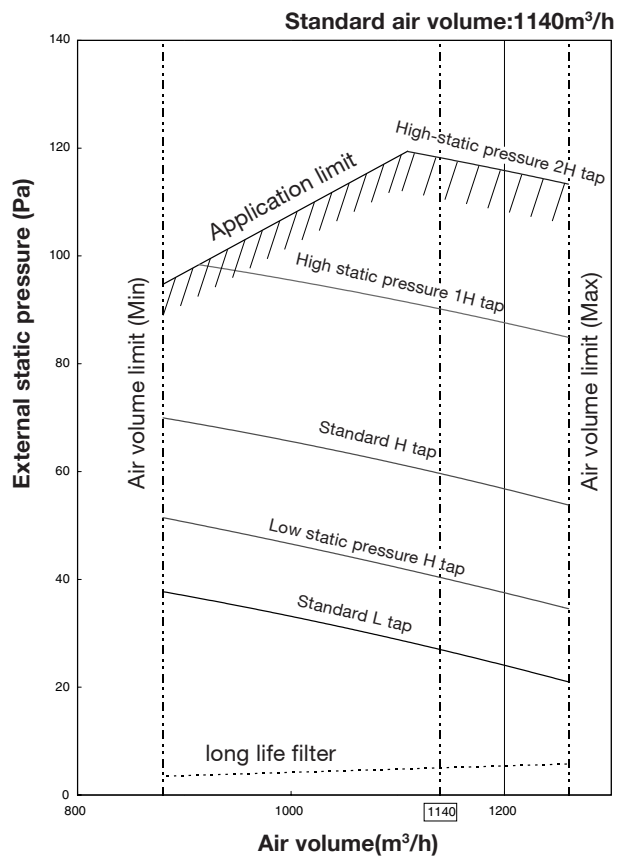


MMD-AP0301BH

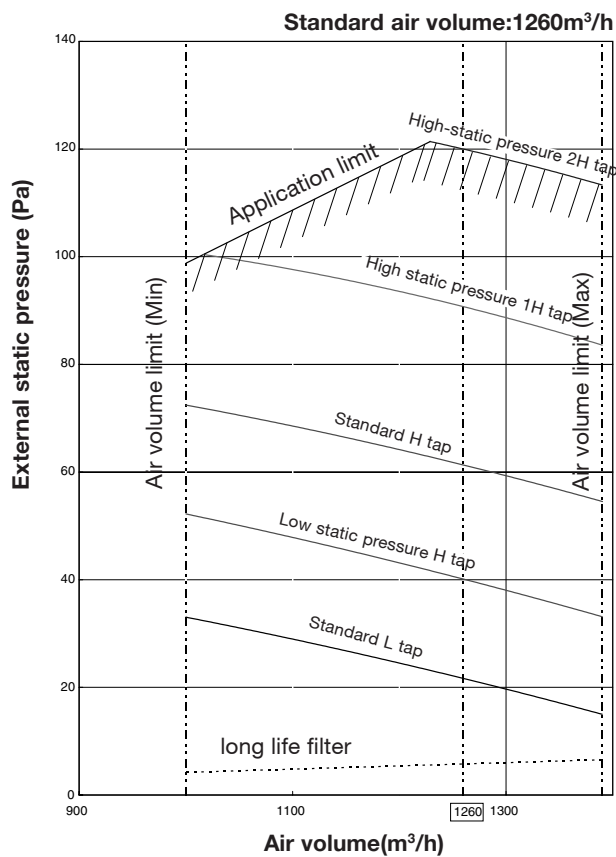

MMD-AP0361BH


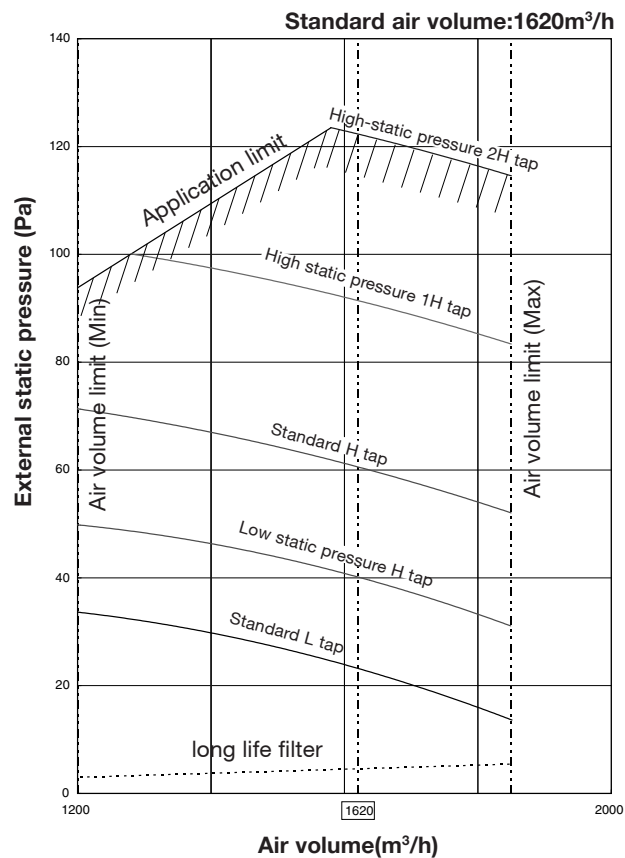


MMD-AP0481BH, AP0561BH


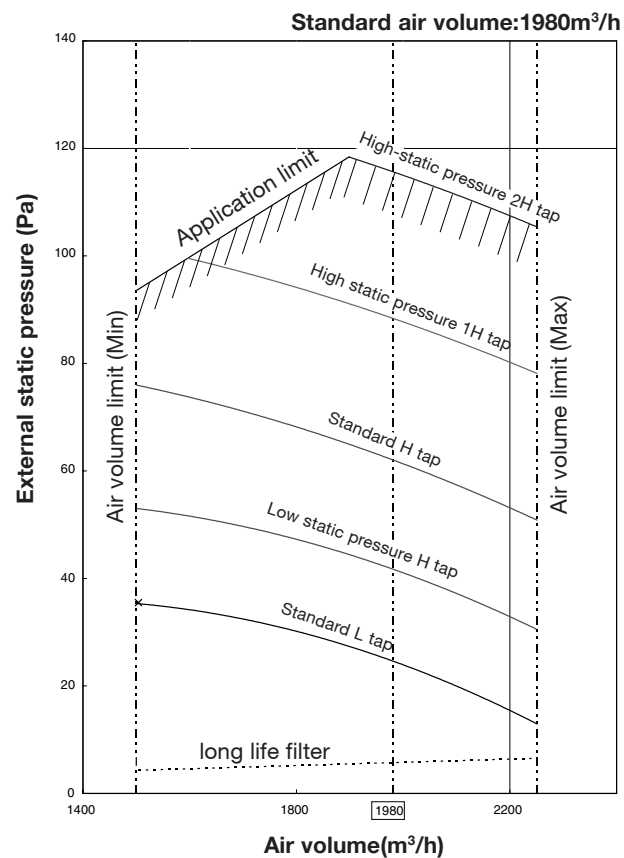


- **Concealed Duct High Static Pressure type**



MMD-AP0181H

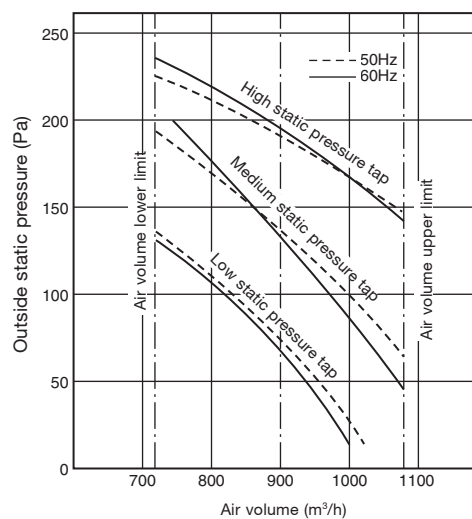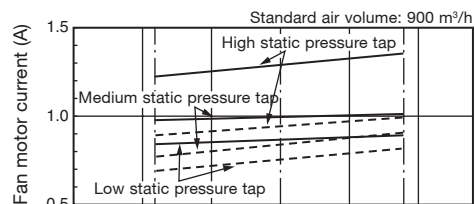



MMD-AP0241H, AP0271H

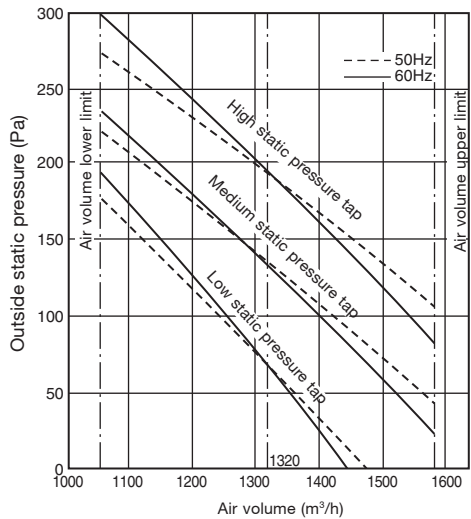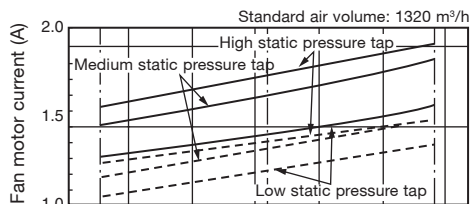


MMD-AP0361H

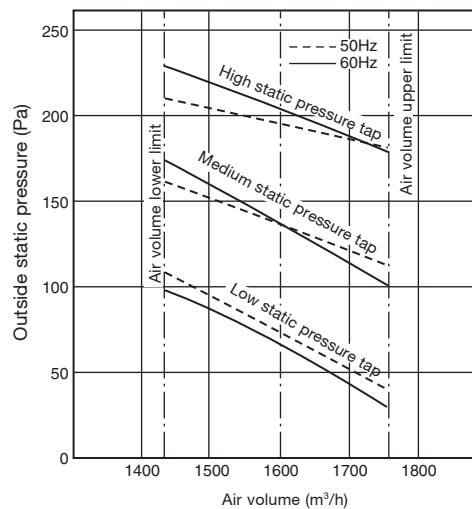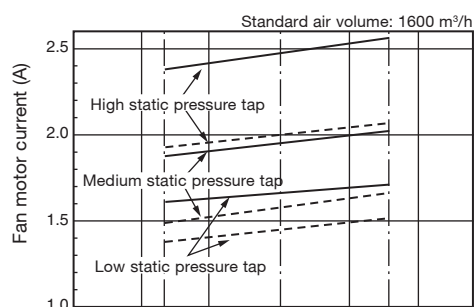


MMD-AP0481H

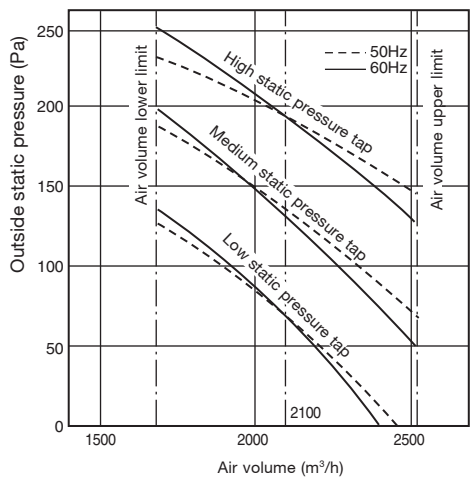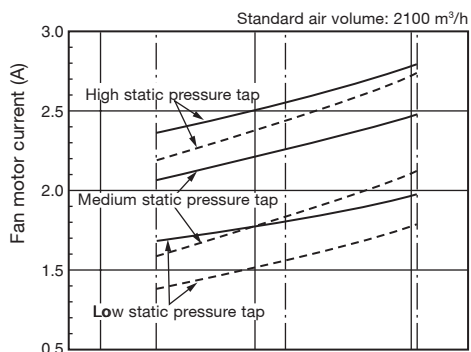

MMD-AP0721H

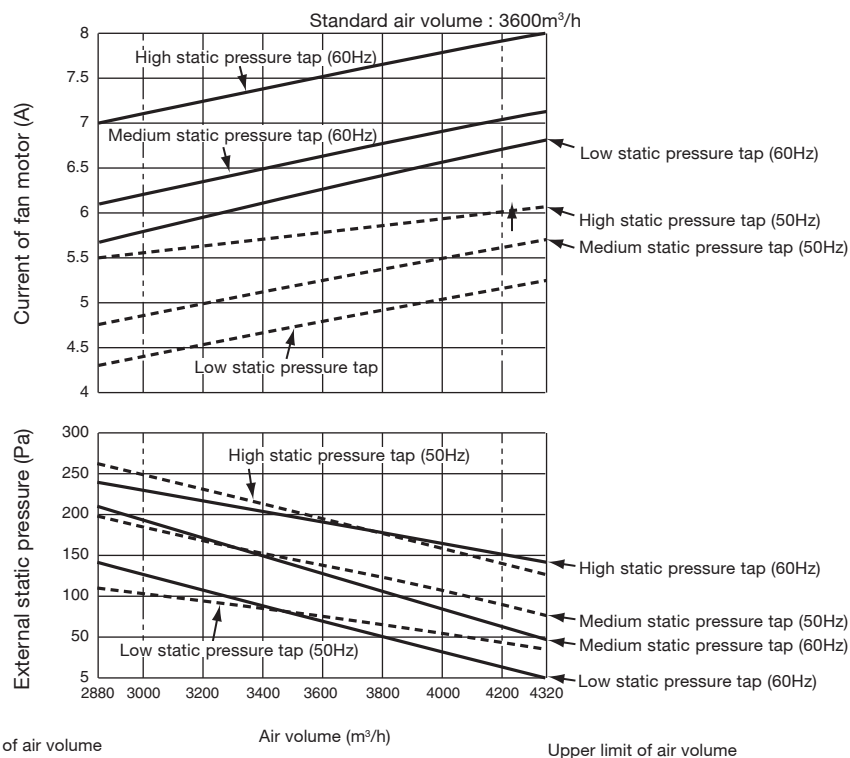

MMD-AP0961H

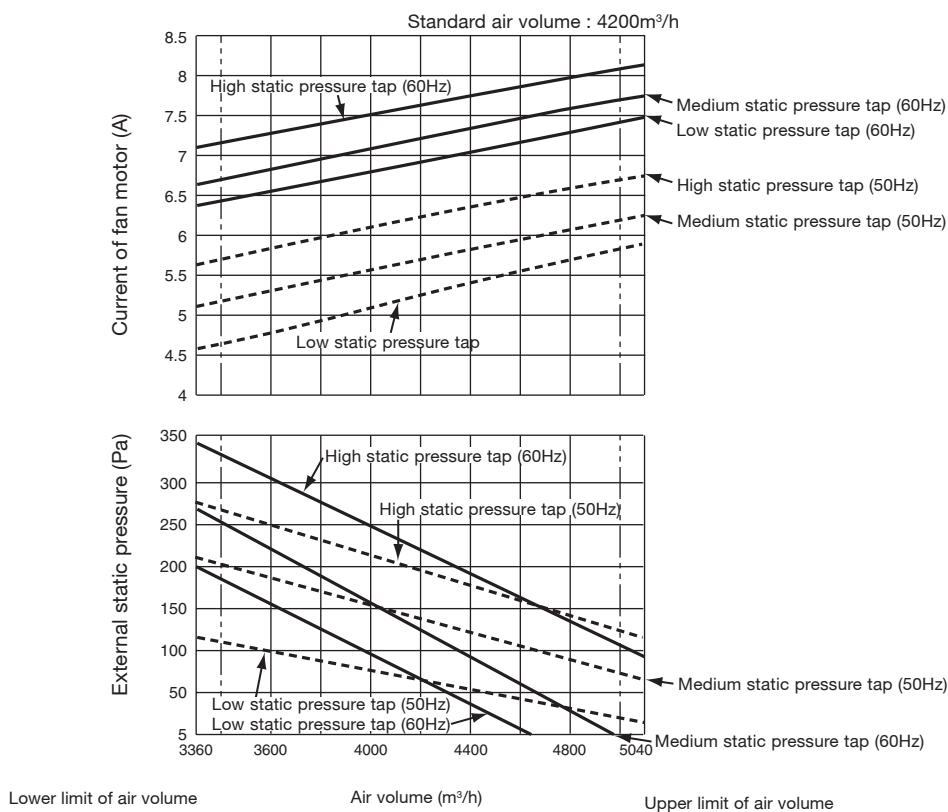

REQUIREMENT

Add a air volume damper to the supplied air duct, and adjust the air volume from 80% to 120% of the standard air volume.


AIR SPEED CHARACTERISTICS

■ Air Speed Distribution


B

4-way air discharge cassette type


MMU-AP0091H, AP0121H

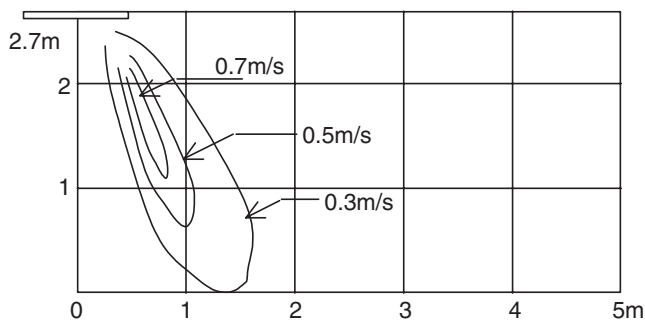


MMU-AP0151H

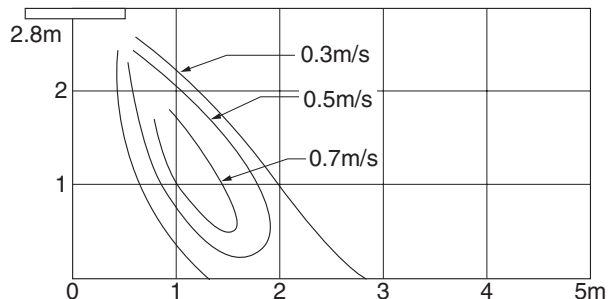


MMU-AP0181H

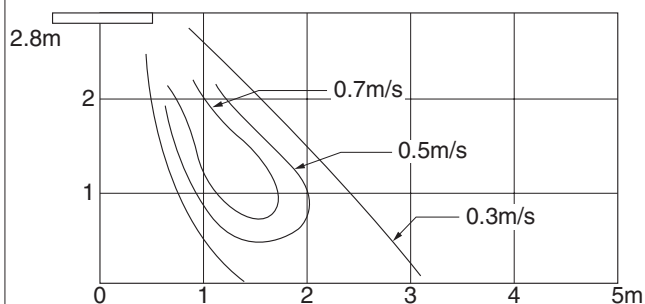


MMU-AP0241H, AP0271H

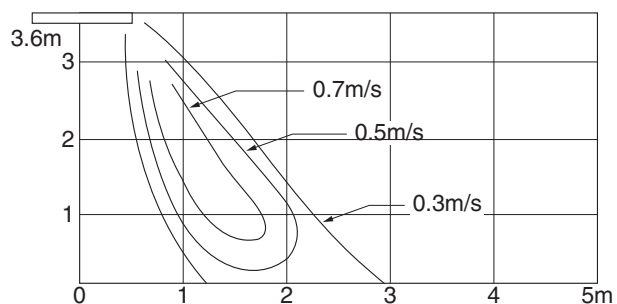


MMU-AP0301H

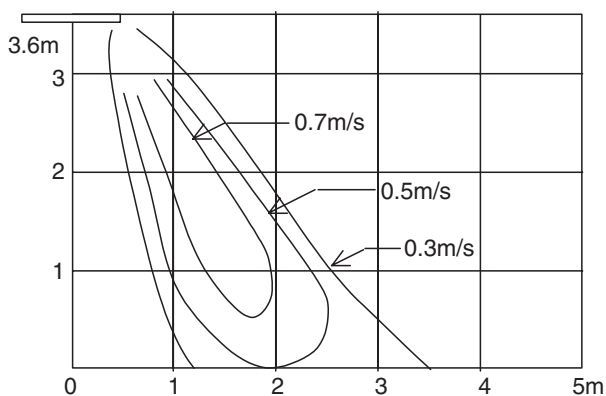


MMU-A0361H

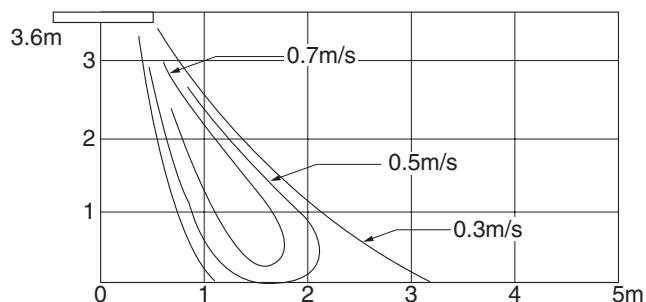

MMU-A0481H

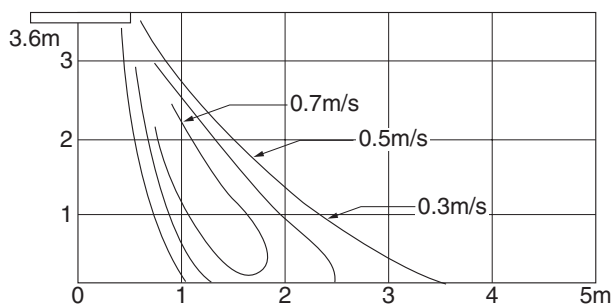


MMU-AP0561H

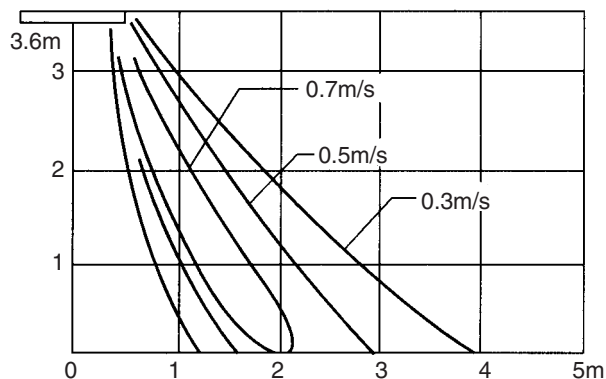


Air Speed Distribution

2-way air discharge cassette type


**MMU-
AP0071WH, AP0091WH, AP0121WH**

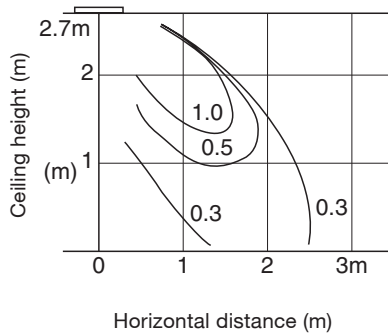


**MMU-
AP0151WH, AP0181WH**

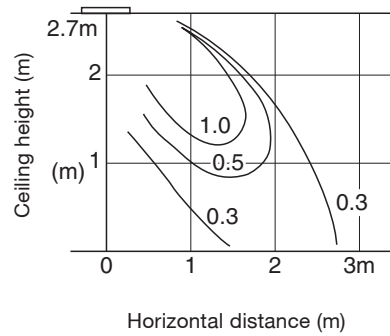


MMU-AP0241WH, AP0271WH

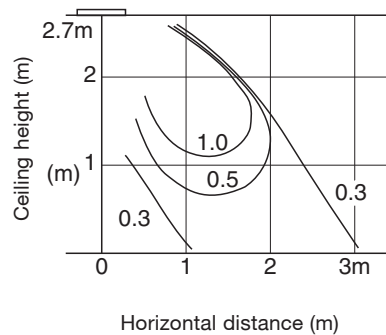

MMU-AP0301WH

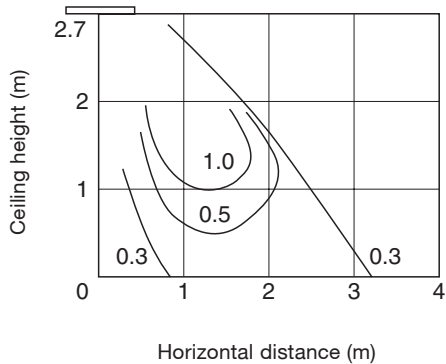


MMU-AP0481WH

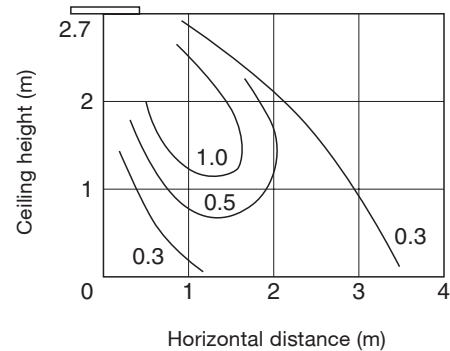


Air Speed Distribution

1-way air discharge cassette type


MMU-AP0071YH, AP0091YH, AP0121YH

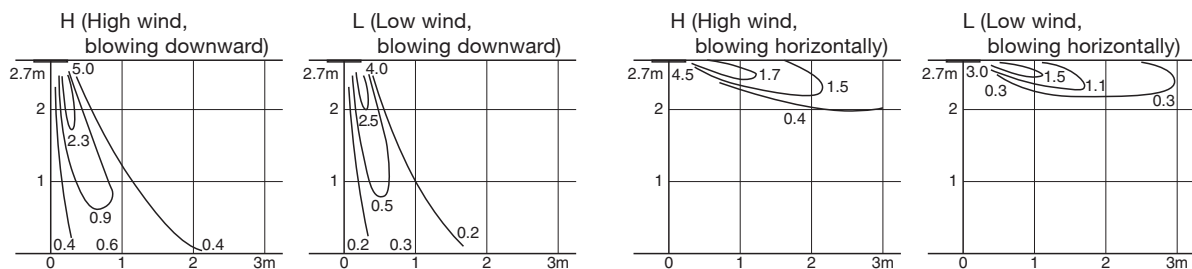

MMU-AP0151SH, AP0181SH

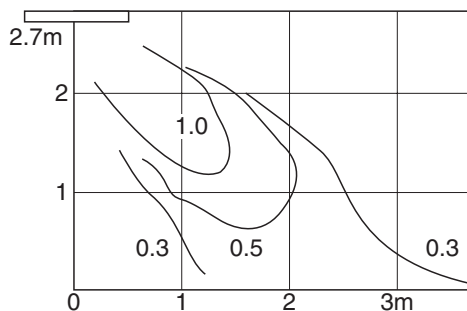


MMU-AP0241SH

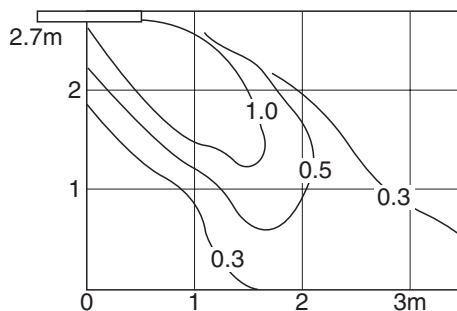


Under ceiling type


MMC-AP0181H, AP0481H

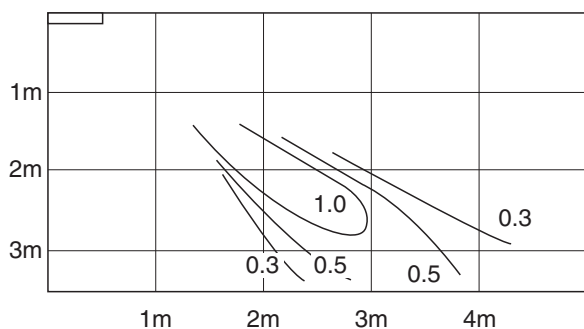

MMC-AP0361H

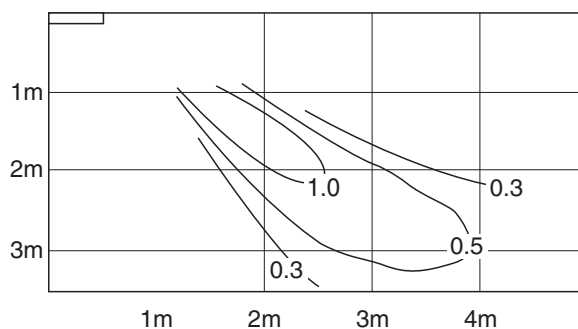


MMC-AP015H, AP0241H, AP0271H

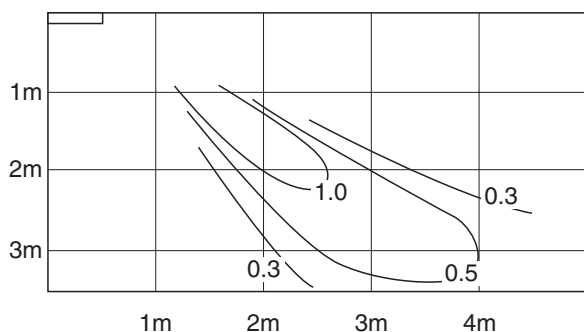


Discharge Air Speed and Air Throw

High wall type


MMK-AP0071H, AP0091H, AP0121H

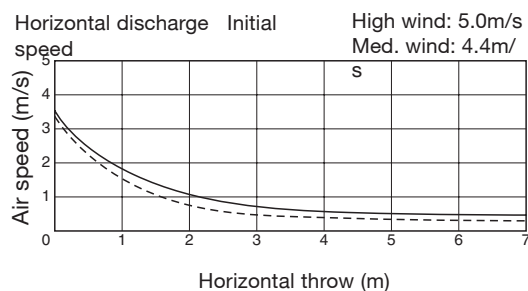

MMK-AP0151H, AP0181H

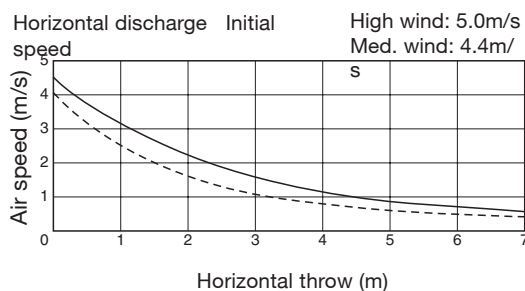


MMK-AP0241H

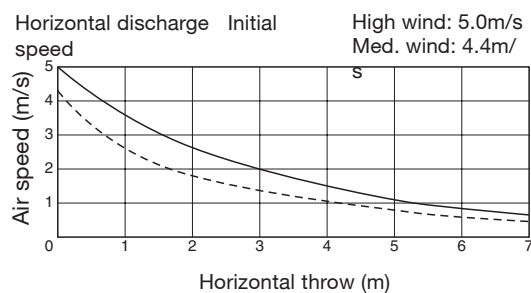


Floor standing cabinet type


MML-AP0071H, AP0091H

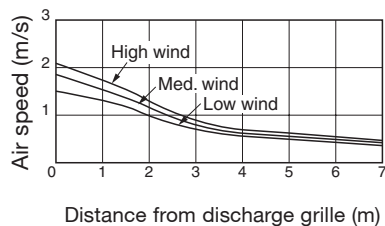

MML-AP0121H, AP0151H




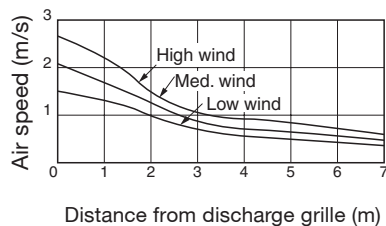


MML-AP0181H, AP0241H

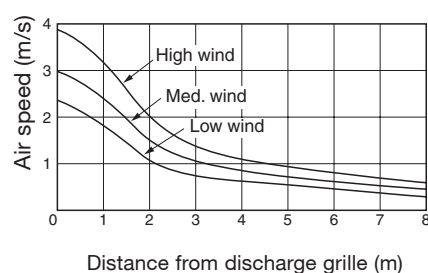

Air Speed Distribution

Floor standing type

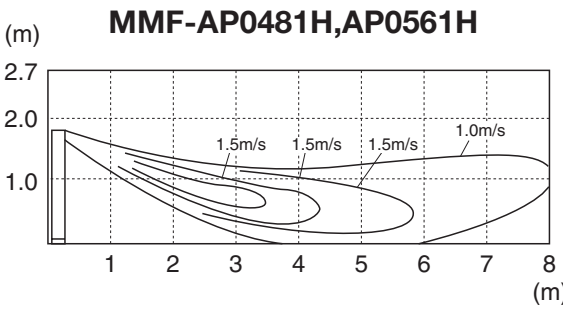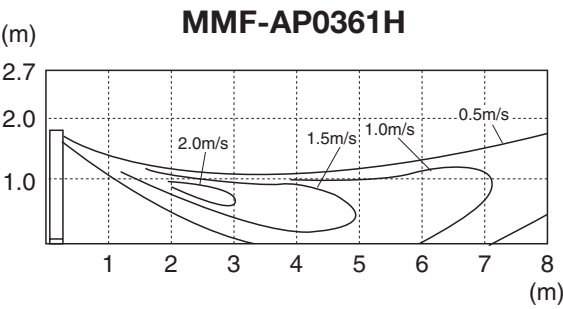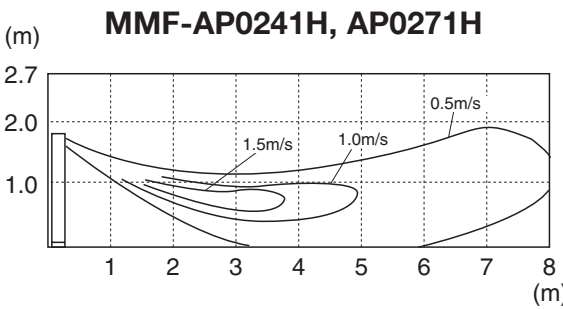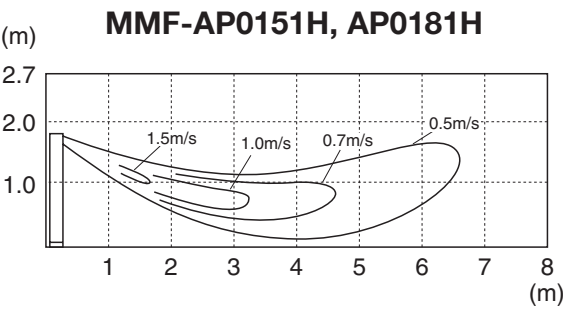




14

Sound characteristics (NC CURVE)

14 Sound characteristics (NC CURVE)


Sound level data (NC CURVE)

Sound level values shown are based on a measurement in a non resonant room.

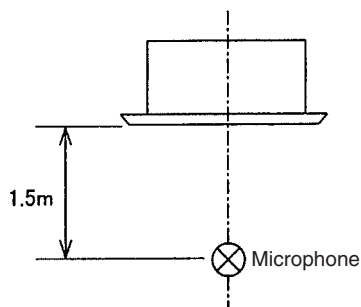


MMU-AP0091H, AP0121H

Fan Tap	H	M	L
Sound pressure level(dB(A))	30	29	27

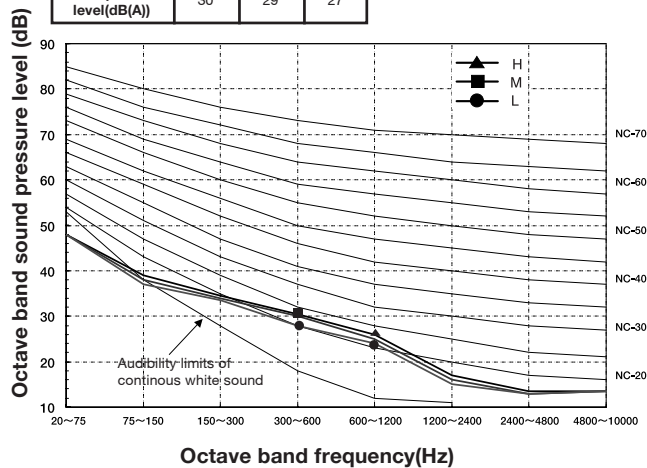


MMU-AP0151H

Fan Tap	H	M	L
Sound pressure level(dB(A))	31	29	27

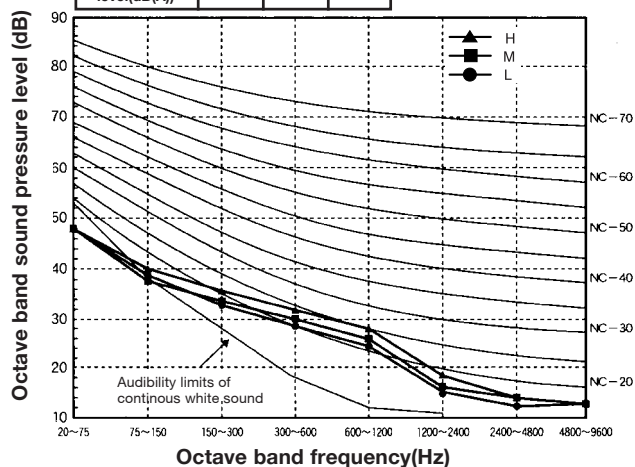


MMU-AP0181H

Fan Tap	H	M	L
Sound pressure level(dB(A))	32	29	28

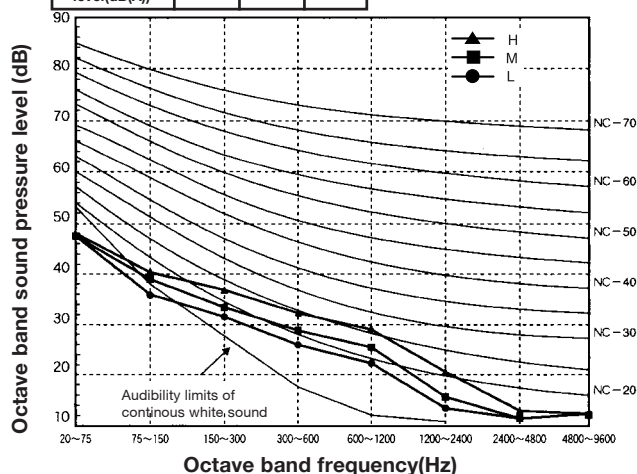

MMU-AP0241H, AP0271H

Fan Tap	H	M	L
Sound pressure level(dB(A))	34	31	28

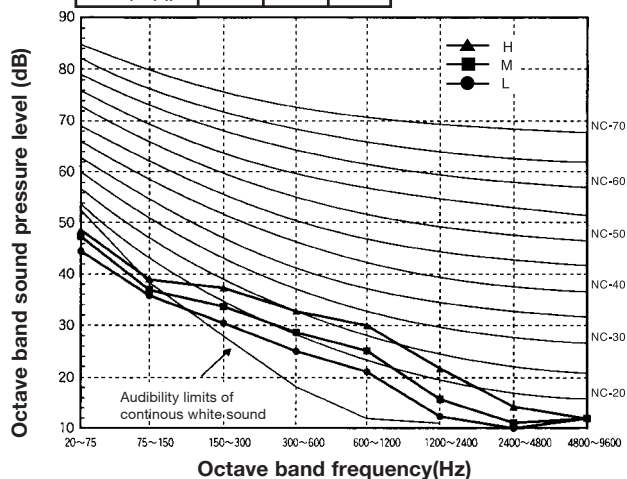


Sound level data (NC CURVE)

Sound level values shown are based on a measurement in a non resonant room.


MMU-AP0301H

Fan Tap	H	M	L
Sound pressure level(dB(A))	37	33	30

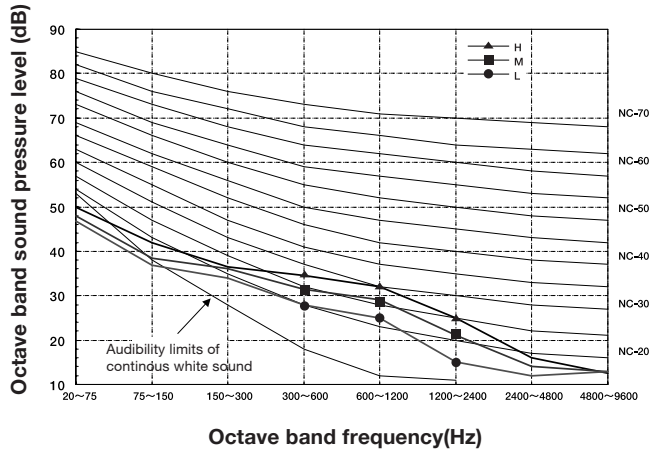


MMU-AP0361H

Fan Tap	H	M	L
Sound pressure level(dB(A))	40	36	33

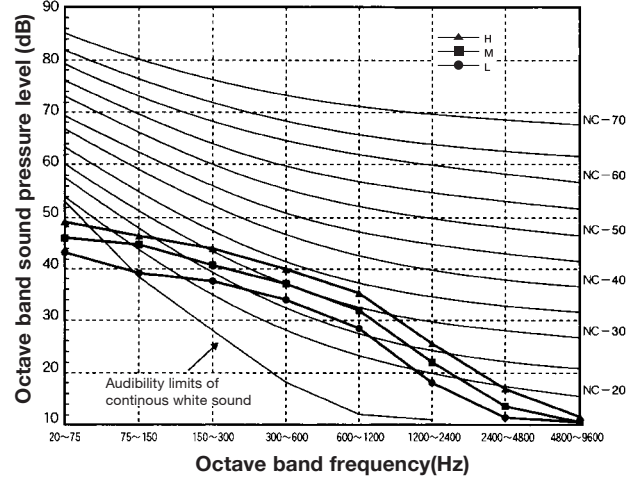


MMU-AP0481H

Fan Tap	H	M	L
Sound pressure level(dB(A))	44	38	34

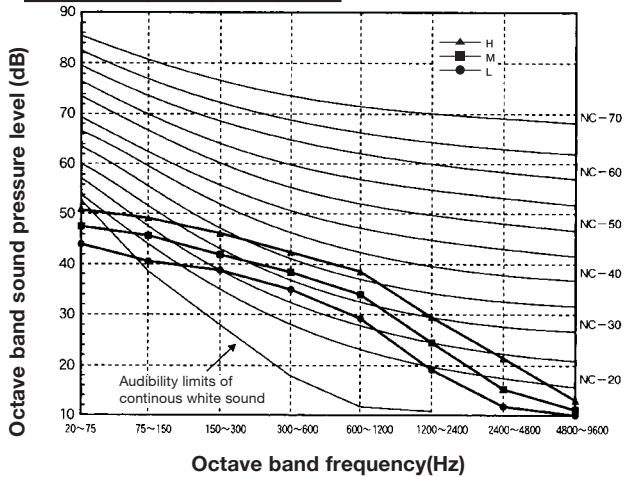


MMU-AP0561H

Fan Tap	H	M	L
Sound pressure level(dB(A))	45	48	34

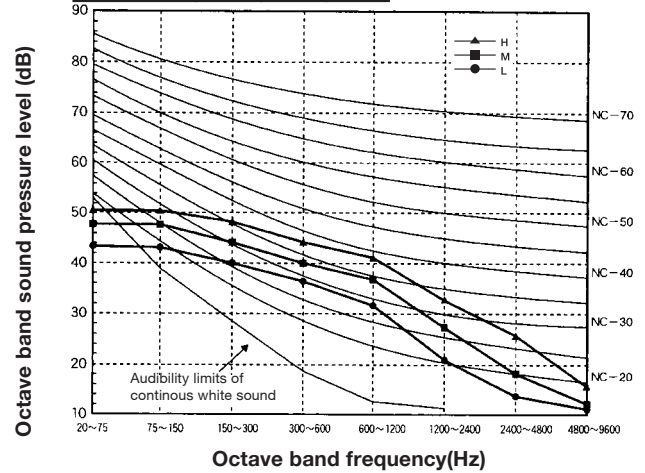


Sound level data (NC CURVE)

Sound level values shown are based on a measurement in a non resound room.

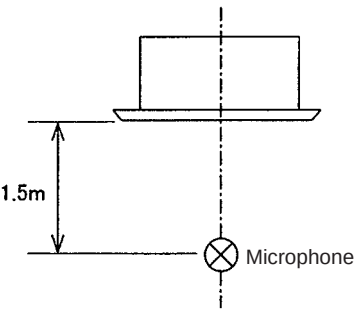


MMU-AP0071WH, AP0091WH, AP0121WH

Fan Tap	H	M	L
Sound pressure level(dB(A))	34	32	30

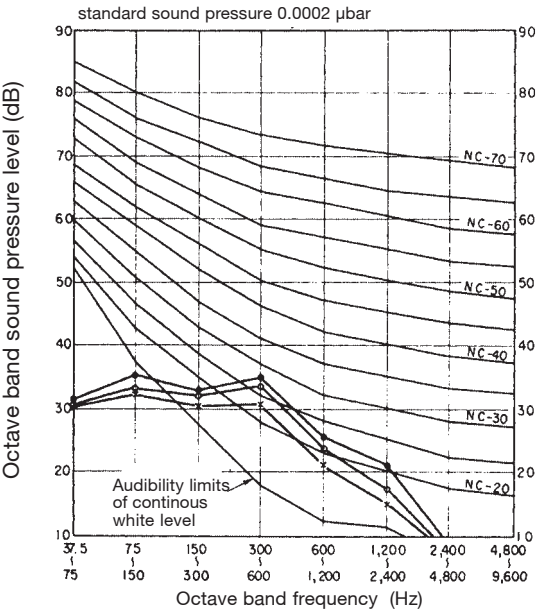


MMU-AP0151WH, AP0181WH

Fan Tap	H	M	L
Sound pressure level(dB(A))	35	33	30

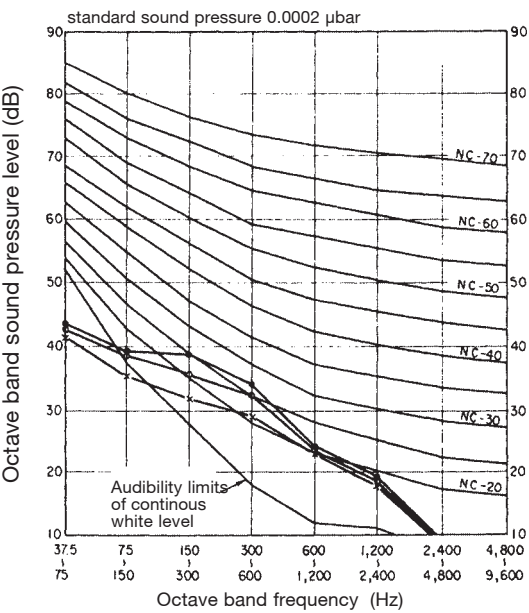

MMU-AP0241WH, AP0271WH


Fan Tap	H	M	L
Sound pressure level(dB(A))	38	35	33

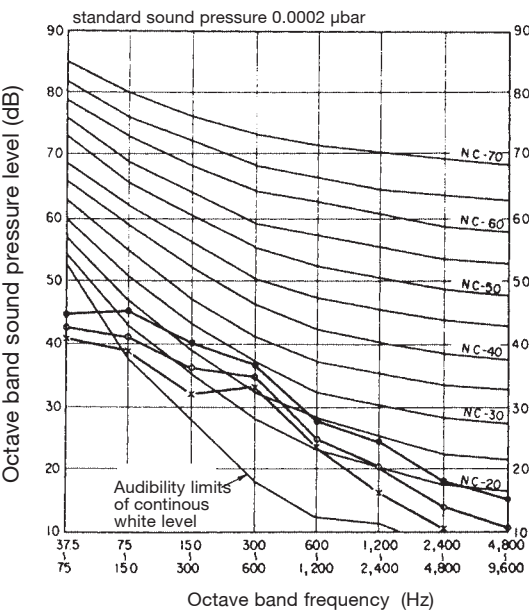

Sound level data (NC CURVE)



MMU-AP0301WH

Fan Tap	H	M	L
Sound pressure level(dB(A))	40	37	34

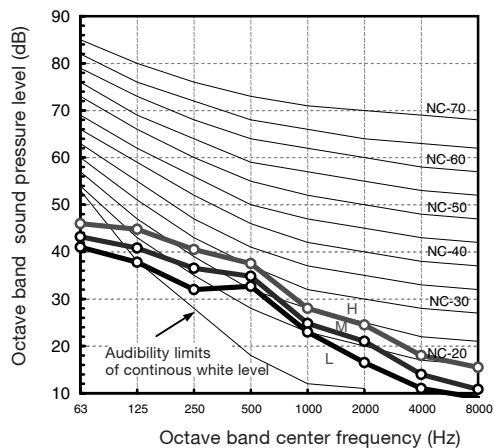


MMU-AP0481WH

Fan Tap	H	M	L
Sound pressure level(dB(A))	45	42	39

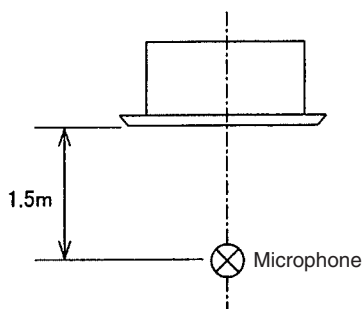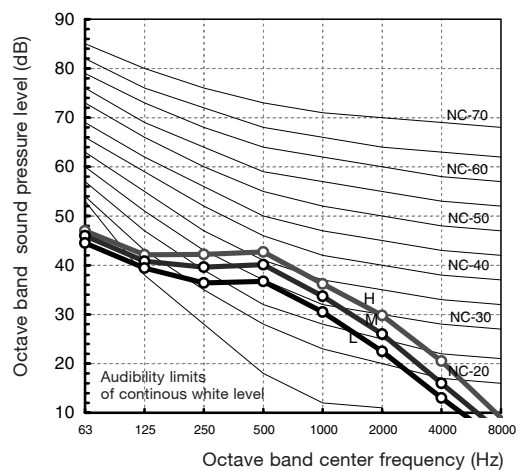


MMU-AP0151SH, AP0181SH

Fan Tap	H	M	L
Sound pressure level(dB(A))	42	39	36

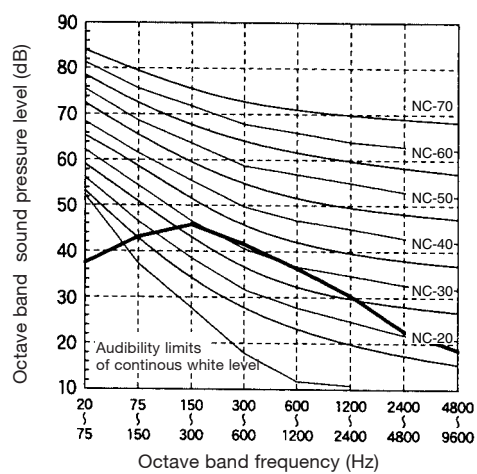


MMU-AP0241SH

Fan Tap	H	M	L
Sound pressure level(dB(A))	43	41	37

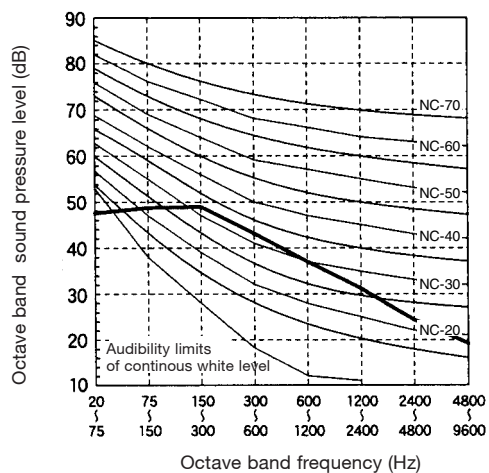


Sound level data (NC CURVE)

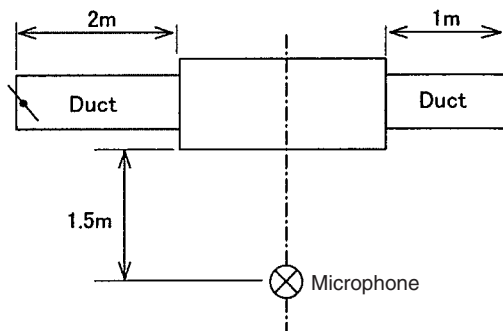


MMD-AP0071BH, AP0091BH

Fan Tap	H	M	L
Sound pressure level (dB(A))	30	28	26

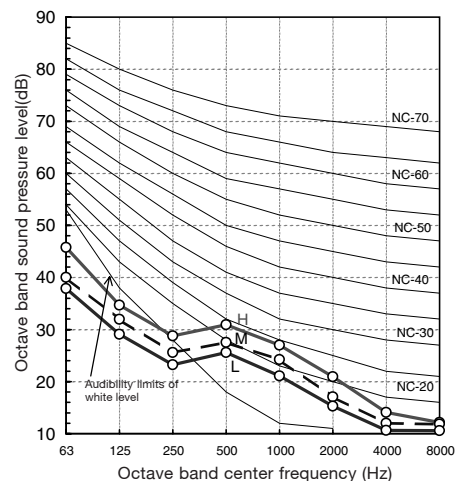


MMD-AP0121BH

Fan Tap	H	M	L
Sound pressure level (dB(A))	31	29	27

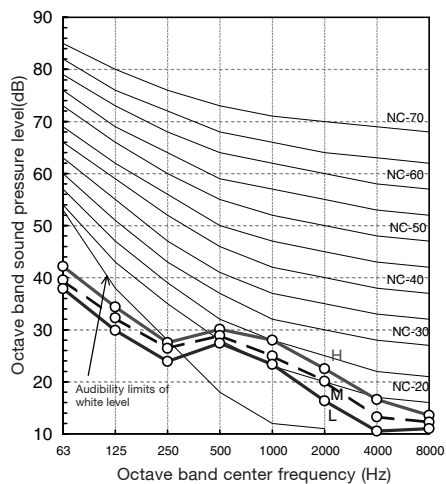


MMD-AP0151BH

Fan Tap	H	M	L
Sound pressure level (dB(A))	31	29	27

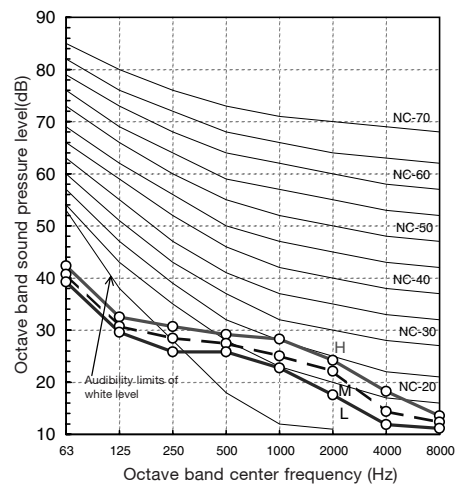

MMD-AP0181BH


Fan Tap	H	M	L
Overall level (dB(A))	32	30	28

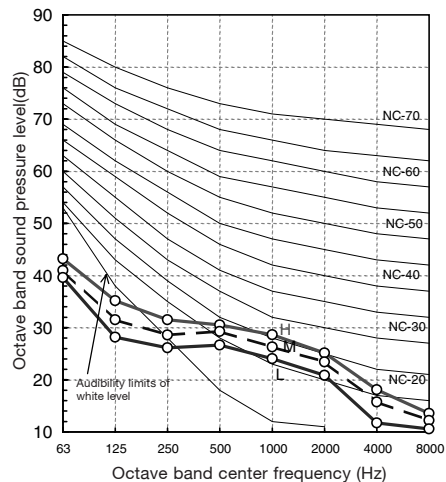

■ Sound level data (NC CURVE)


MMD-AP0241BH, AP0271BH

Fan Tap	H	M	L
Sound pressure level (dB(A))	33	31	29

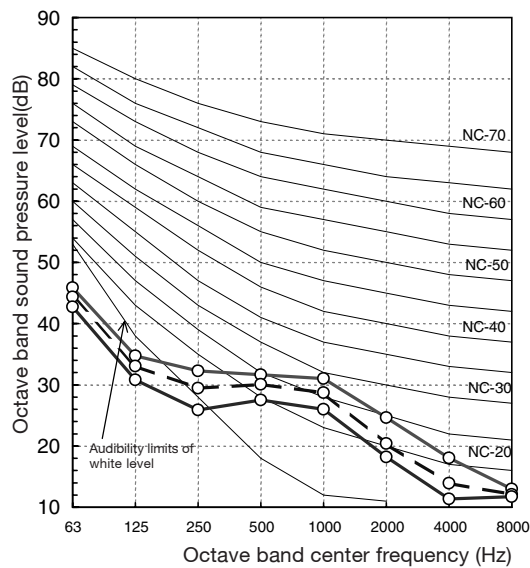


MMD-AP0301BH

Fan Tap	H	M	L
Sound pressure level (dB(A))	34	32	29

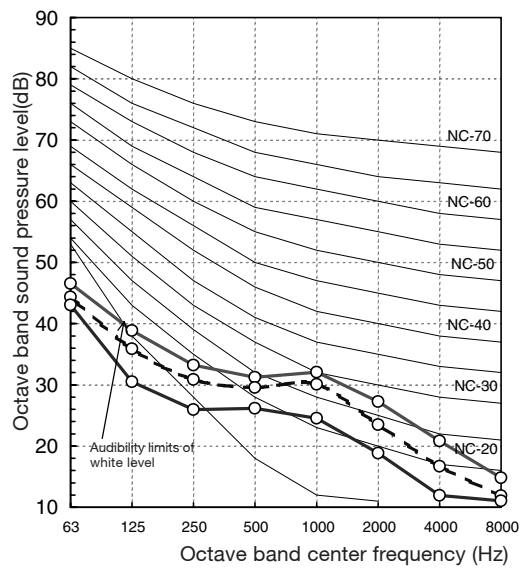


MMD-AP0361BH

Fan Tap	H	M	L
Sound pressure level (dB(A))	36	34	32

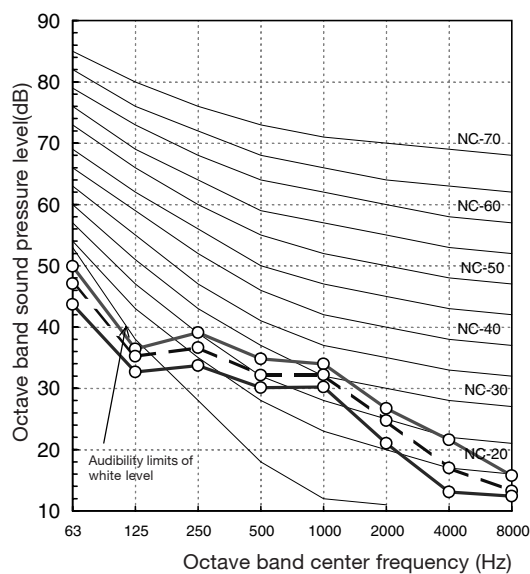


MMD-AP0481BH, AP0561BH

Fan Tap	H	M	L
Sound pressure level (dB(A))	38	36	32


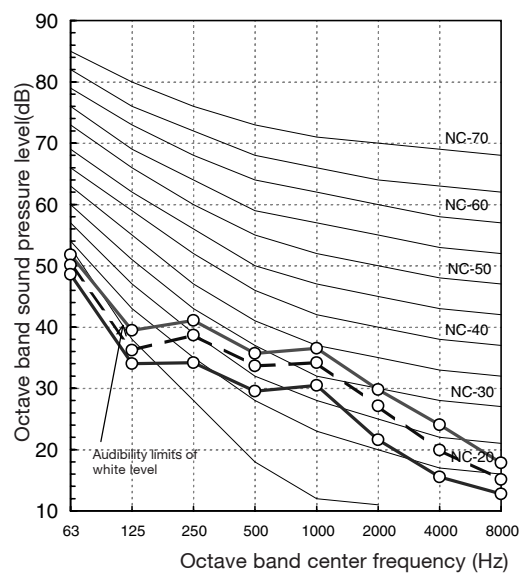


Sound level data (NC CURVE)



Sound level values shown are based on a measurement in a non resonant room.

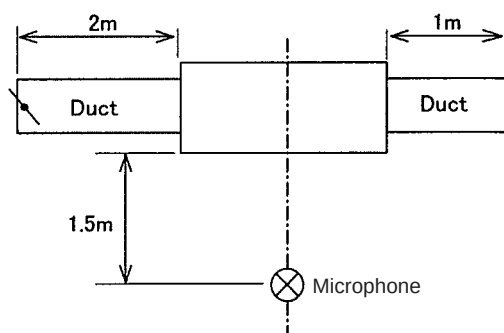





MMD-AP0181H

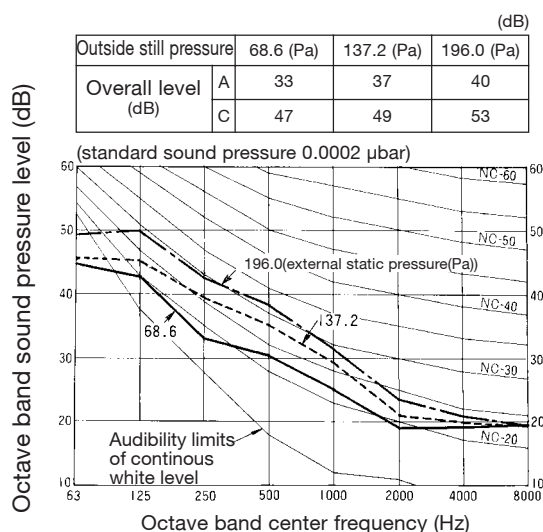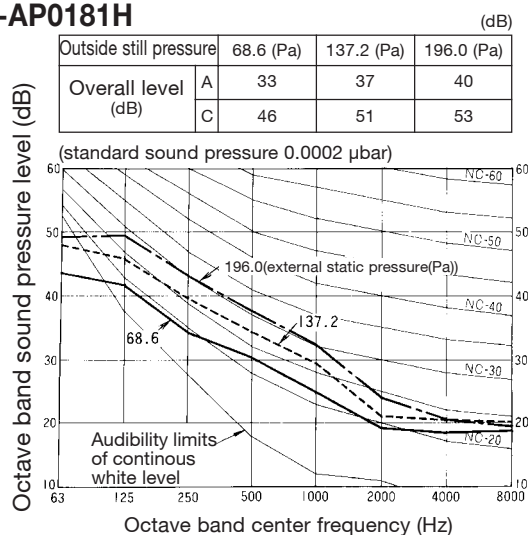

MMD-AP0241H, AP0271H

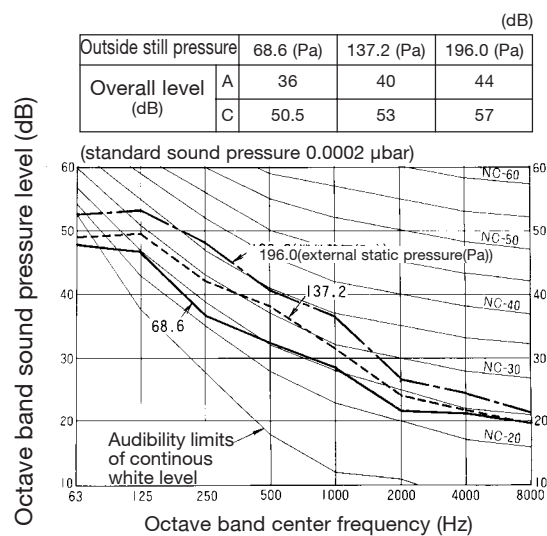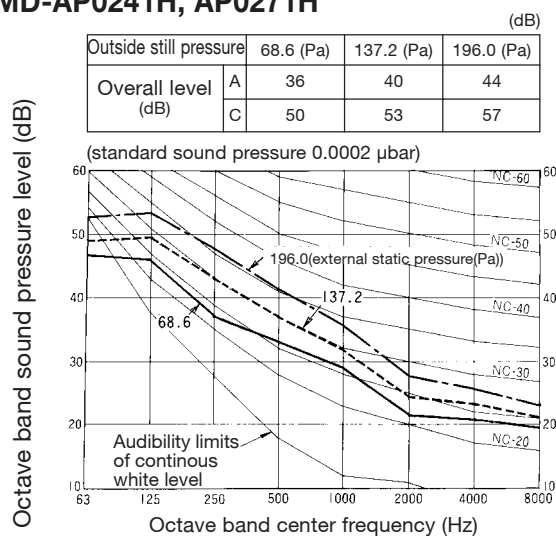



MMD-AP0361H

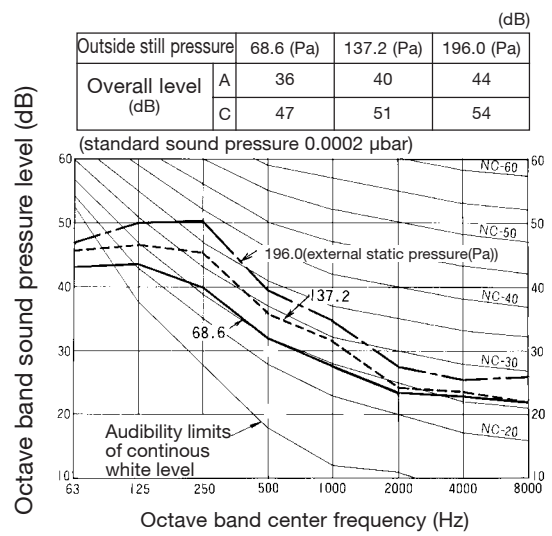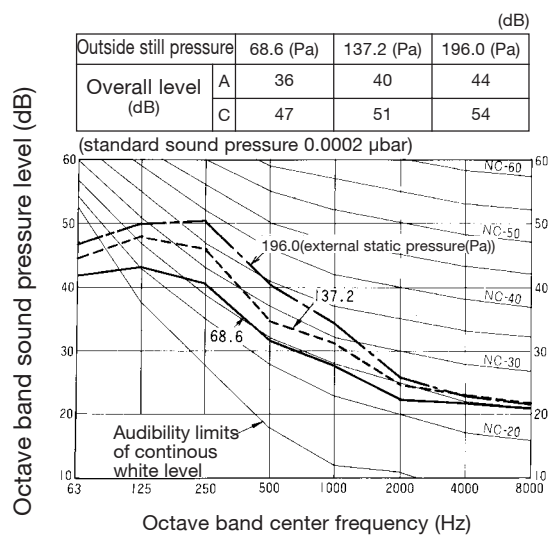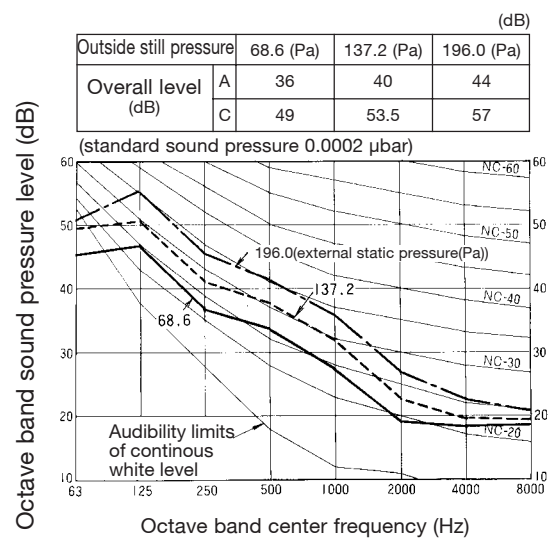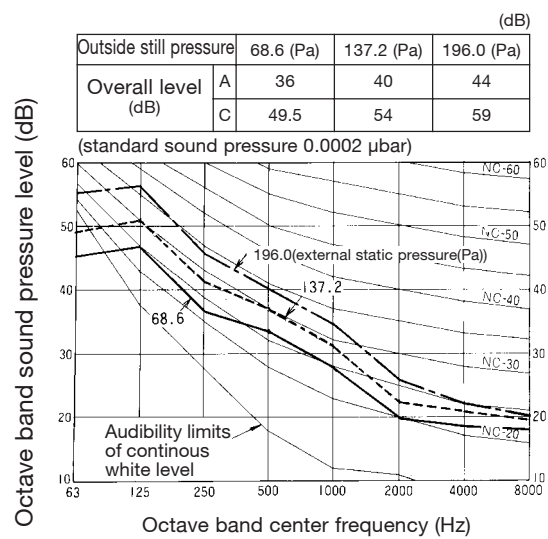



Sound level data (NC CURVE)

Sound level values shown are based on a measurement in a non resonant room.

MMD-AP0721H

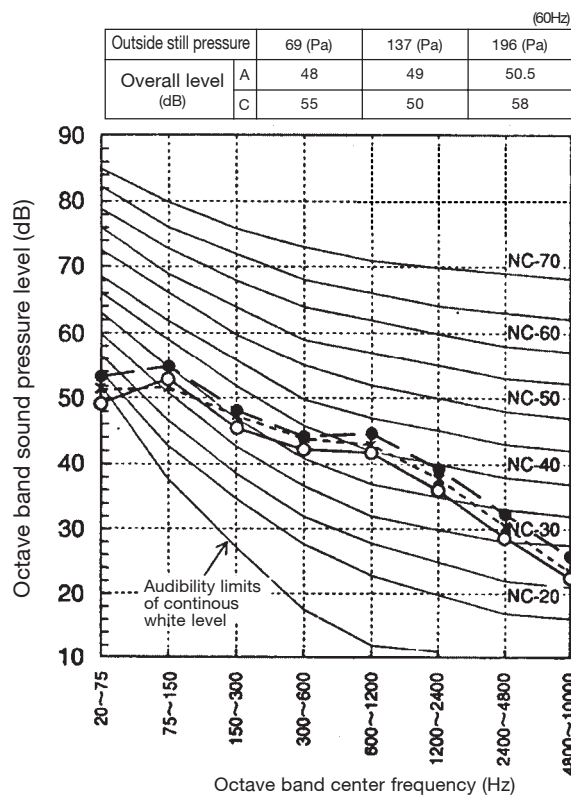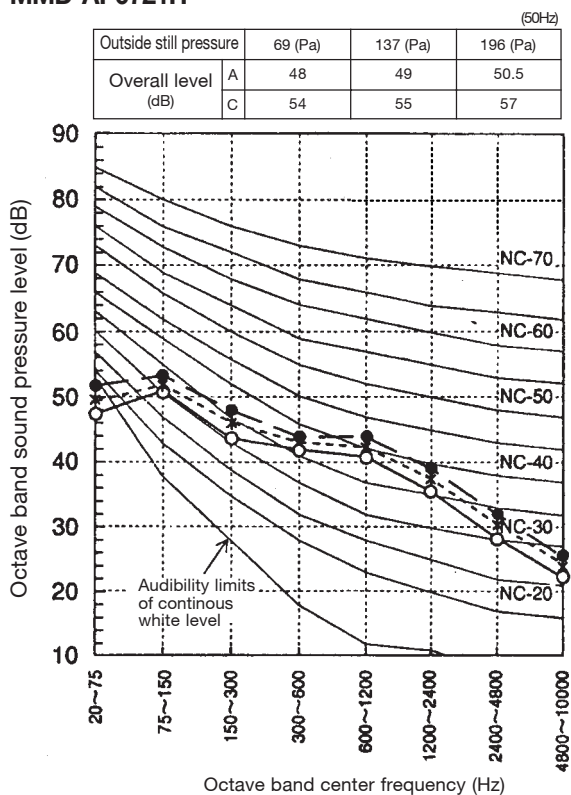


MMD-AP0961H

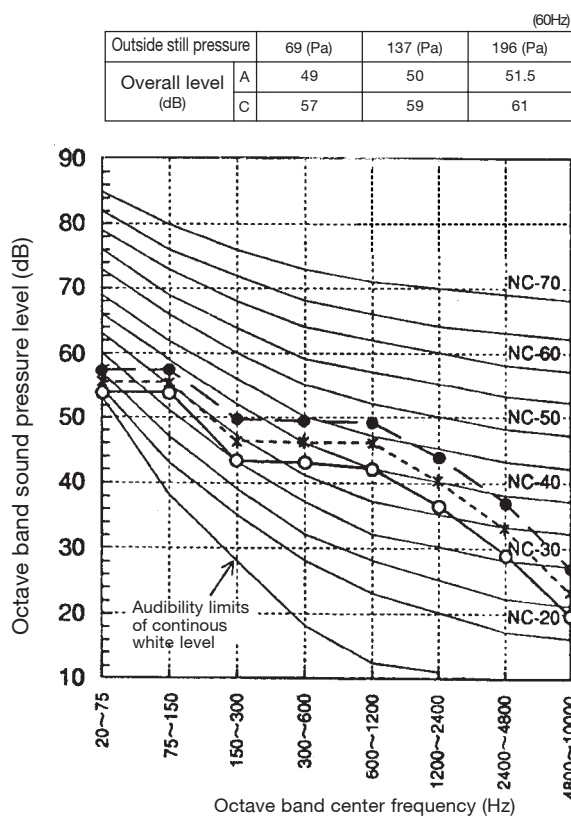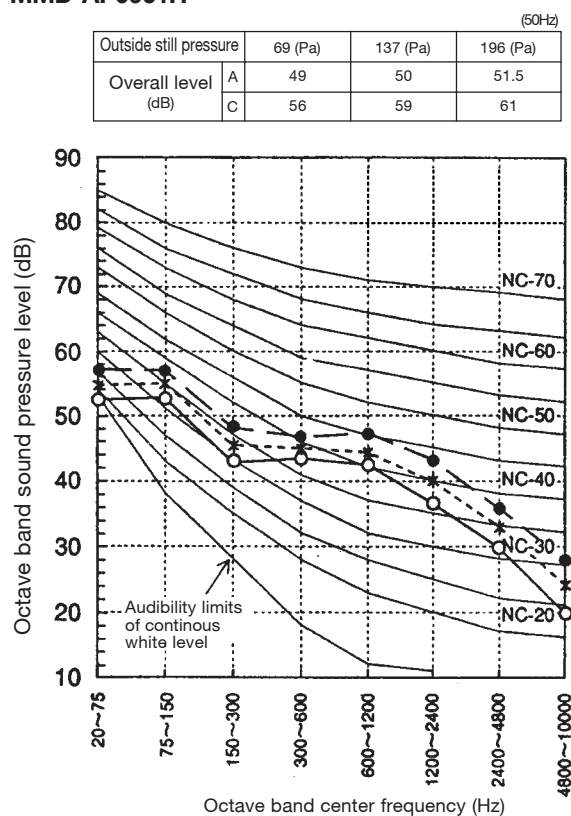


Sound level data (NC CURVE)

Sound level values shown are based on a measurement in a non resonant room.

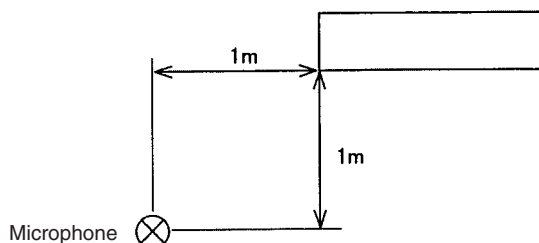


MMC-AP0151H

Fan Tap	H	M	L
Sound pressure level(dB(A))	35	32	30

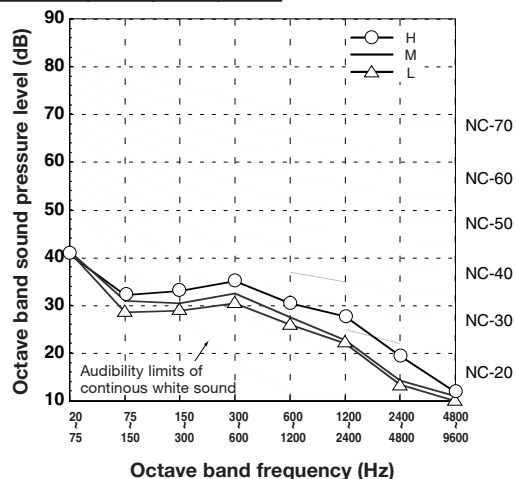


MMC-AP0181H

Fan Tap	H	M	L
Sound pressure level(dB(A))	36	33	30

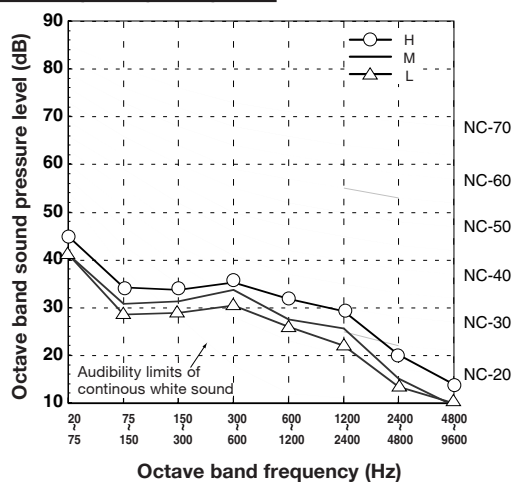


MMC-AP0241H,AP0271H

Fan Tap	H	M	L
Sound pressure level(dB(A))	38	36	33

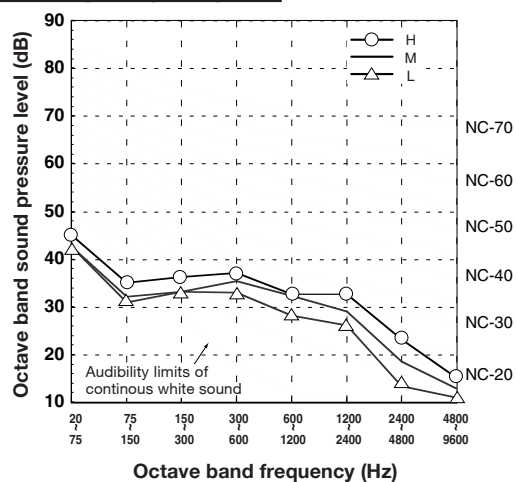


MMC-AP0361H

Fan Tap	H	M	L
Sound pressure level(dB(A))	41	38	35

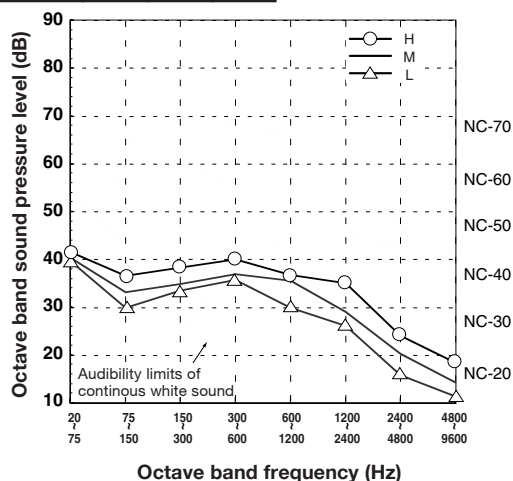


MMC-AP0481H

Fan Tap	H	M	L
Sound pressure level(dB(A))	43	40	37

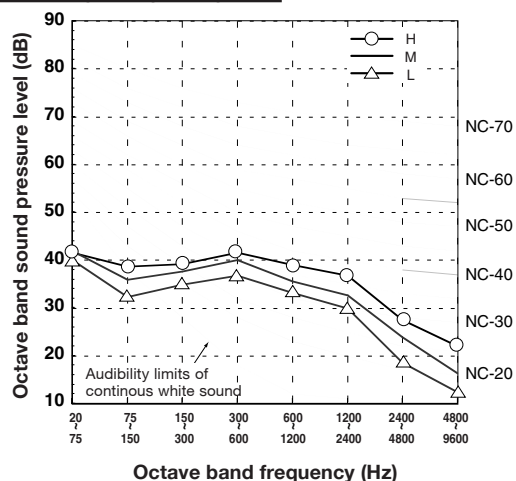


Sound level data (NC CURVE)

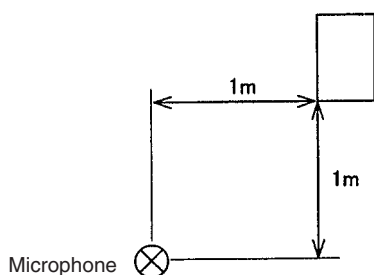


MMK-AP0071H, AP0091H, AP0121H

Fan Tap	H	M	L
Sound pressure level(dB(A))	39	34	31

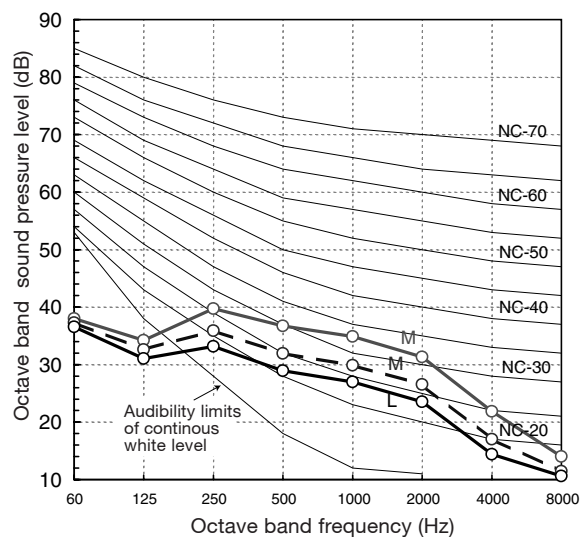


MMK-AP0151H, AP0181H

Fan Tap	H	M	L
Sound pressure level(dB(A))	42	38	35

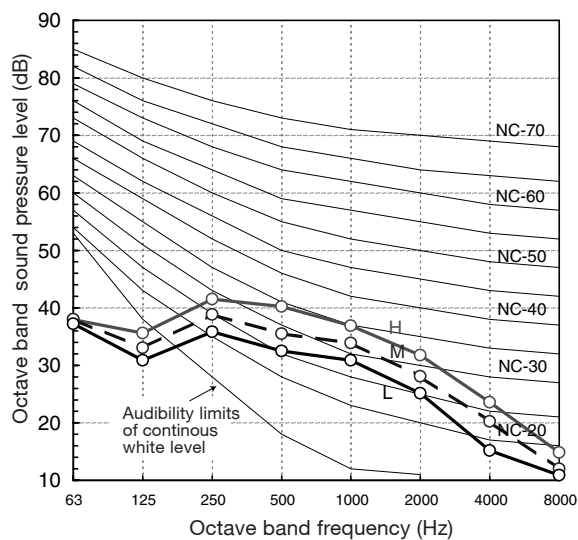


MMK-AP0241H

Fan Tap	H	M	L
Sound pressure level(dB(A))	42	38	35


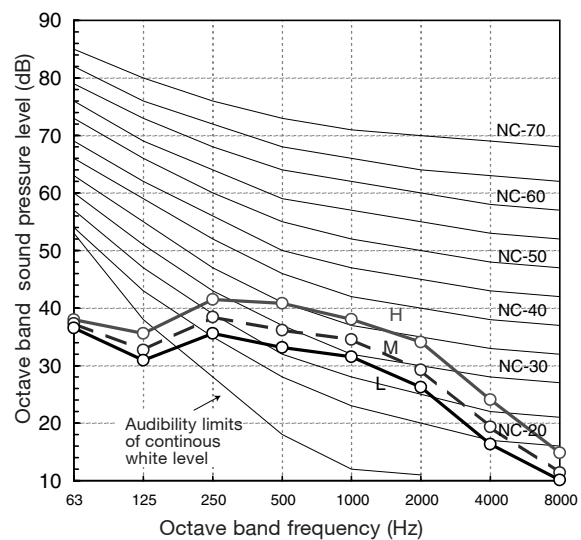


Sound level data (NC CURVE)



Sound level values shown are based on a measurement in a non resound room.

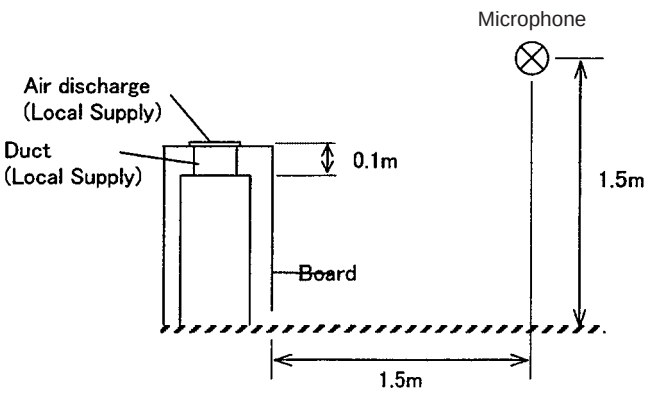

MML-AP0071BH, AP0091BH, AP0121BH

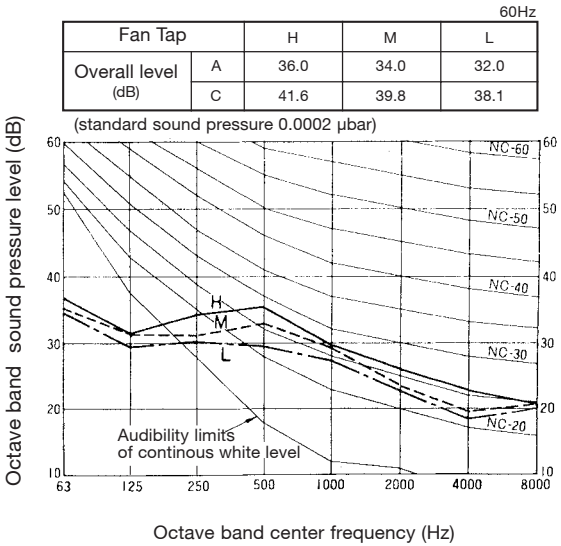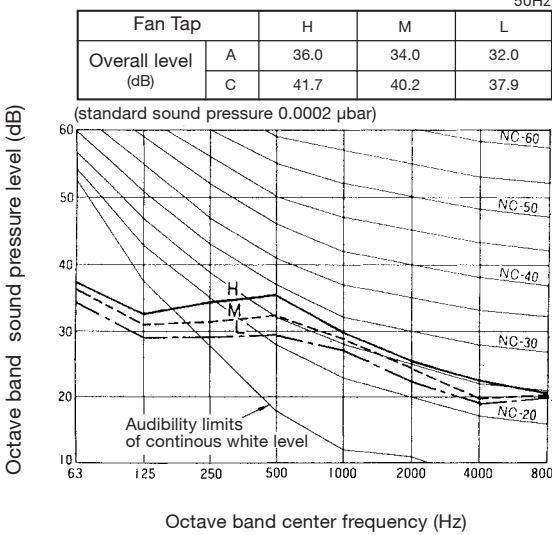


MML-AP0151BH, AP0181BH

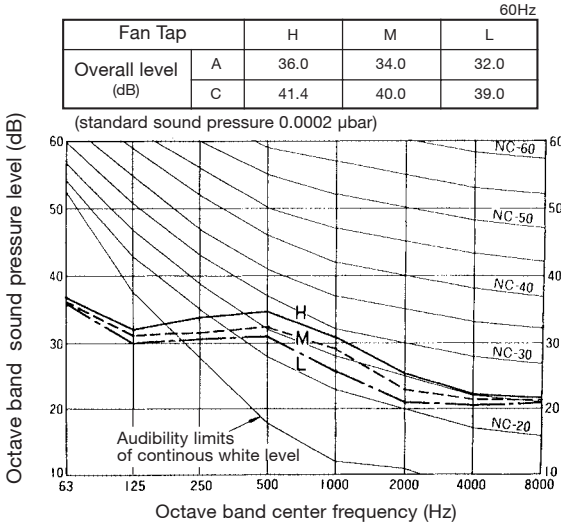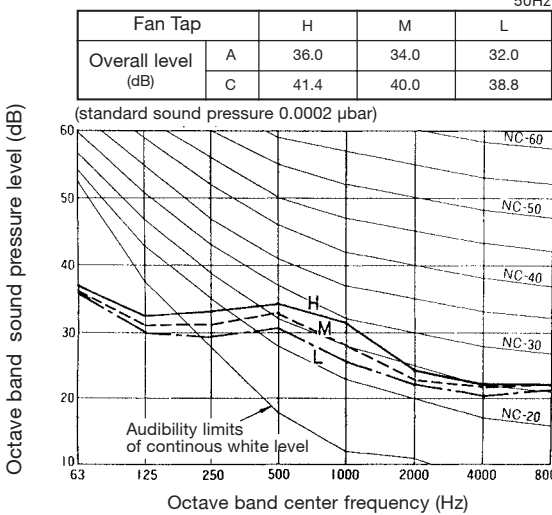

MML-AP0241BH


50Hz

Fan Tap		H	M	L
Overall level (dB)	A	42.0	37.0	33.0
	C	46.4	41.0	37.7

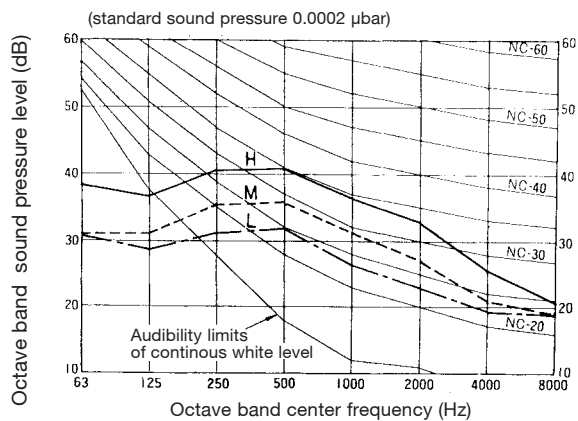


60Hz

Fan Tap		H	M	L
Overall level (dB)	A	42.0	37.0	33.0
	C	46.6	41.0	38.0

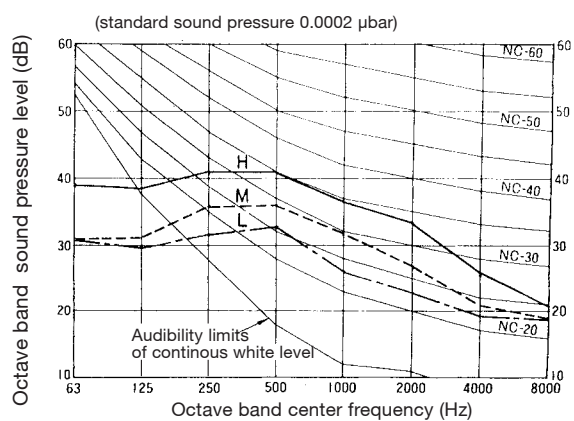


Sound level data (NC CURVE)

Sound level values shown are based on a measurement in a non resonant room.

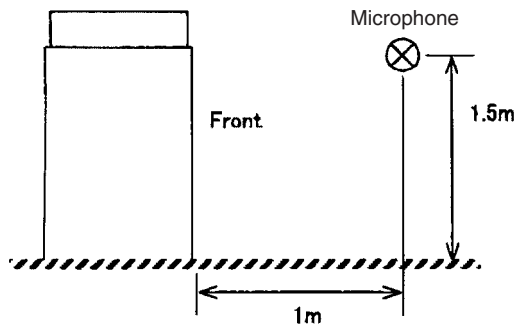


MMY-MAP0501HT8, MAP0501HT7, MAP0501T8

Sound pressure Level (dB(A)) 55

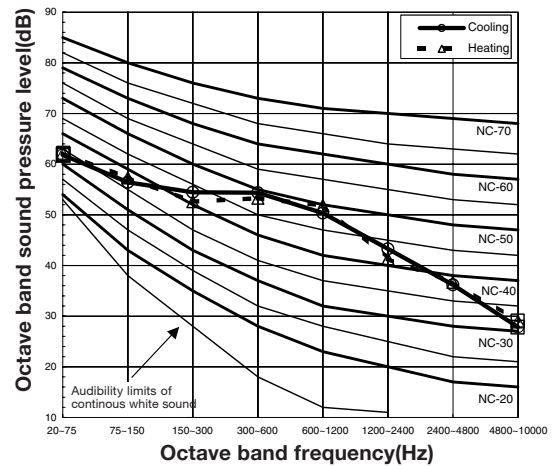


MMY-MAP0601HT8, MAP0601HT7, MAP0601T8

Sound pressure Level (dB(A)) 56

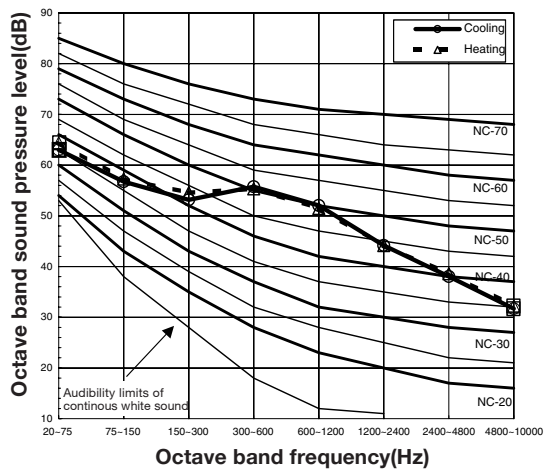


MMY-MAP0801HT8, MAP0801HT7, MAP0801T8

Sound pressure Level (dB(A)) 57

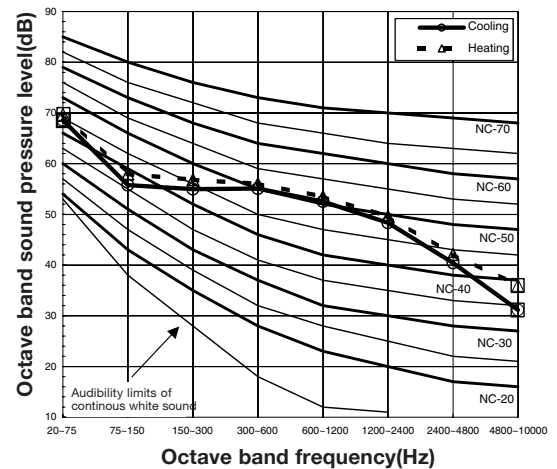


MMY-MAP1001HT8, MAP1001HT7, MAP1001T8

Sound pressure Level (dB(A)) 58

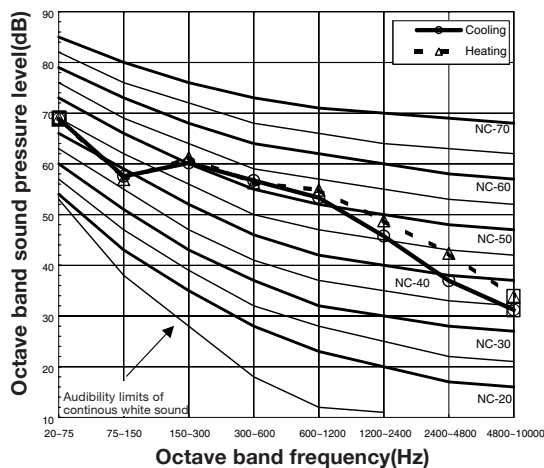

MMY-MAP1201HT8, MAP1201HT7, MAP1201T8


Sound pressure Level (dB(A)) 59

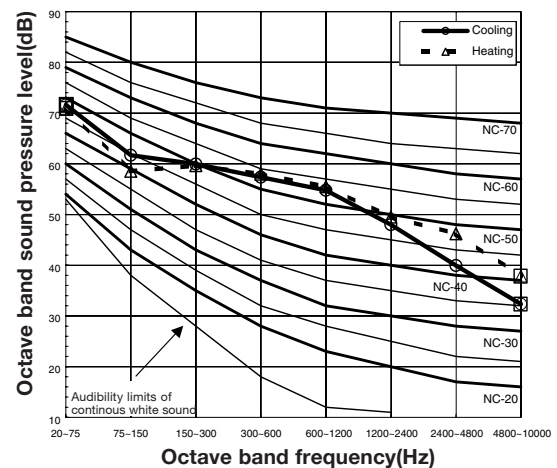


Sound level data (NC CURVE)

Sound level values shown are based on a measurement in a non resonant room.


MMY-AP1401HT8, AP1401HT7, AP1401T8

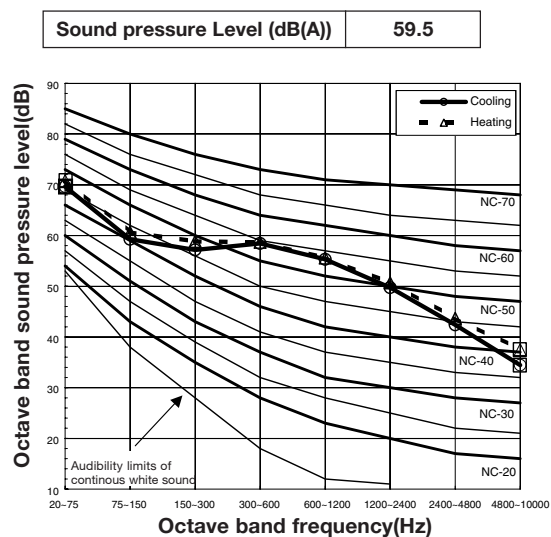


MMY-AP1601HT8, AP1601HT7, AP1601T8

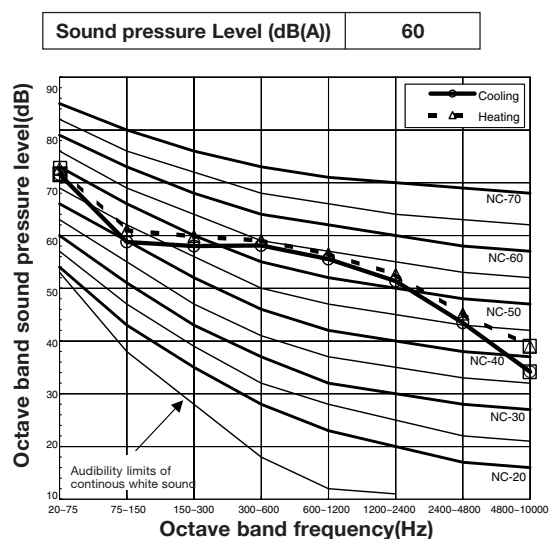


MMY-AP1801HT8, AP1801HT7, MAP1801T8

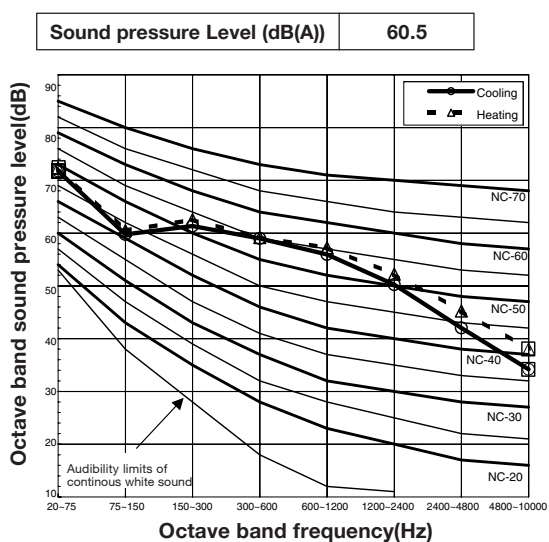


MMY-AP2001HT8, AP2001HT7, AP2001T8

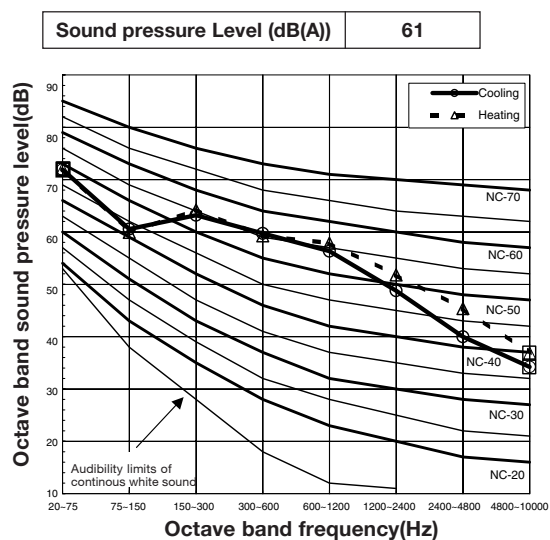

MMY-AP2201HT8, AP2201HT7, AP2201T8

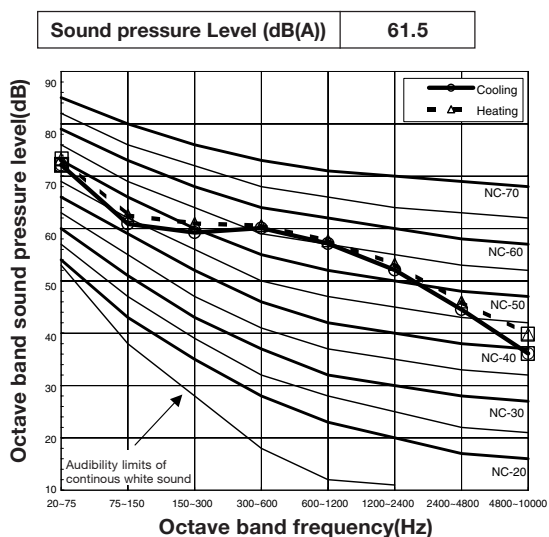


MMY-AP2211HT8, AP2211HT7, AP2211T8

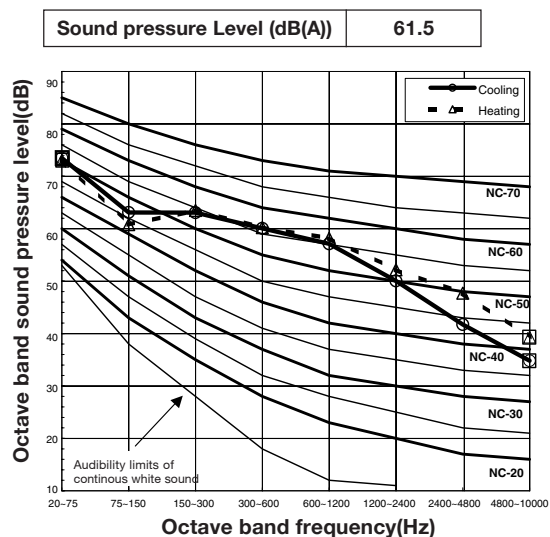


Sound level data (NC CURVE)

Sound level values shown are based on a measurement in a non resound room.


MMY-AP2401HT8, AP2401HT7, AP2401T8

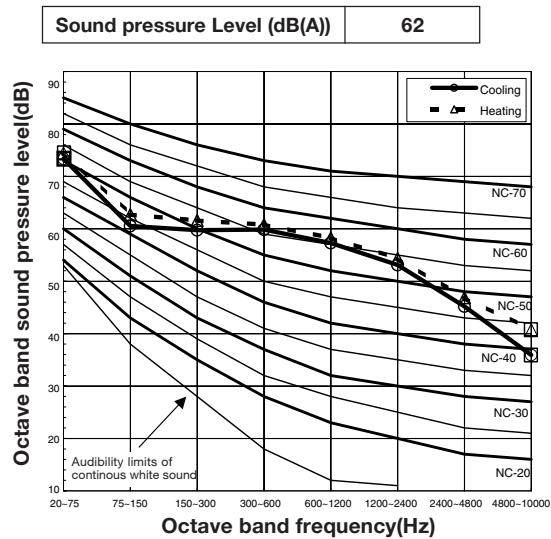


MMY-AP2411HT8, AP2411HT7, AP2411T8

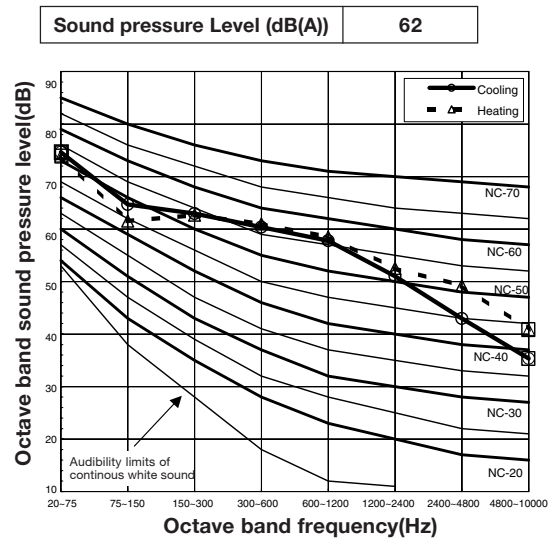


MMY-AP2601HT8, AP2601HT7, AP2601T8

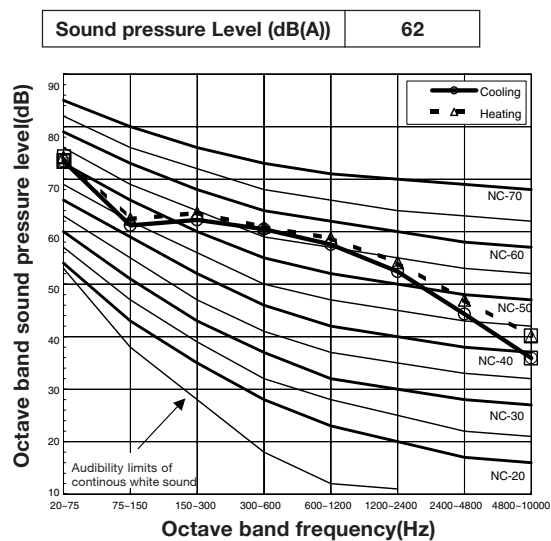

MMY-AP2801HT8, AP2801HT7, AP2801T8

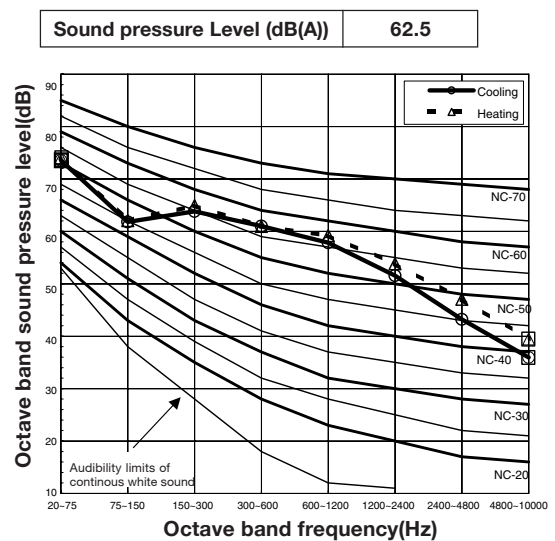


MMY-AP3001HT8, AP3001HT7, AP3001T8

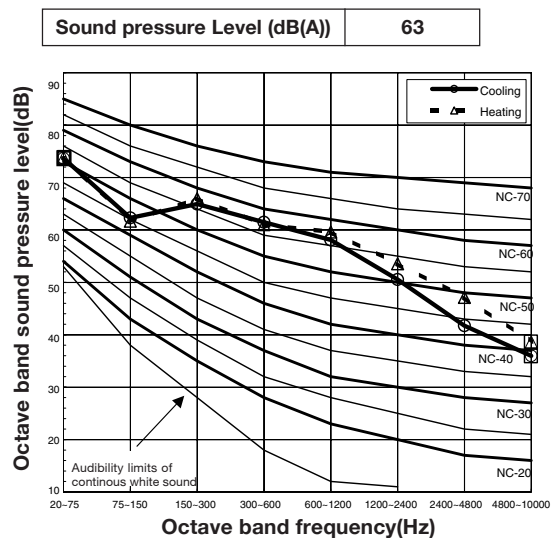


Sound level data (NC CURVE)

Sound level values shown are based on a measurement in a non resound room.


MMY-AP3201HT8, AP3201HT7, AP3201T8

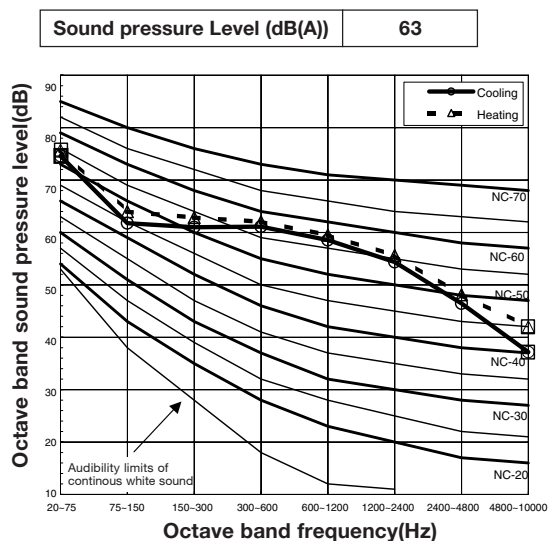


MMY-AP3211HT8, AP3211HT7, AP3211T8

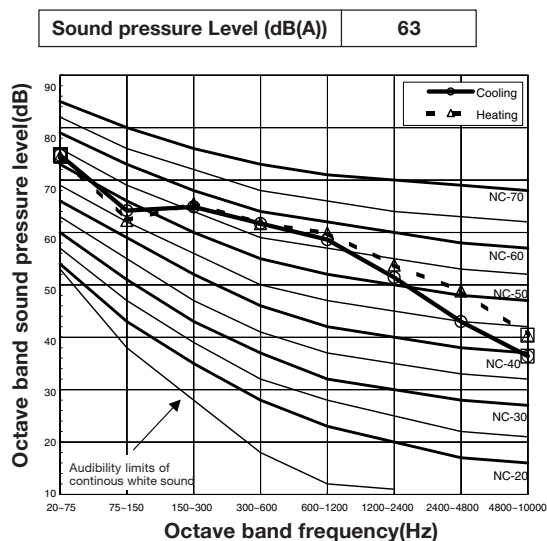


MMY-AP3401HT8, AP3401HT7, AP3401T8

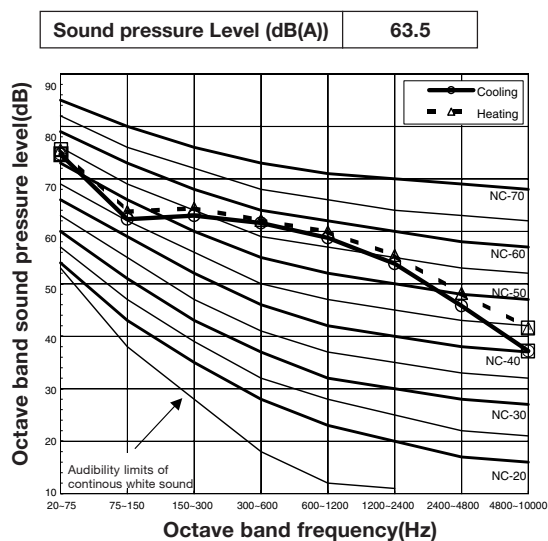


MMY-AP3411HT8, AP3411HT7, AP3411T8

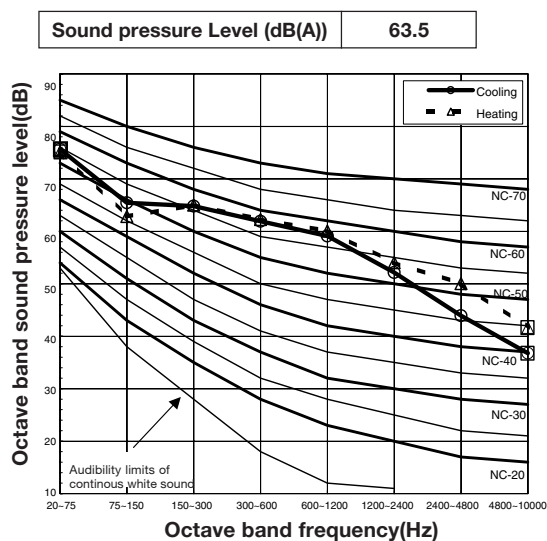

MMY-AP3601HT8, AP3601HT7, AP3601T8

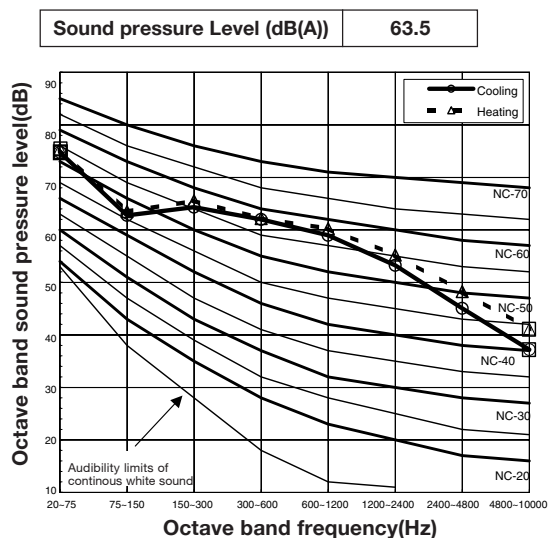


MMY-AP3611HT8, AP3611HT7, AP3611T8

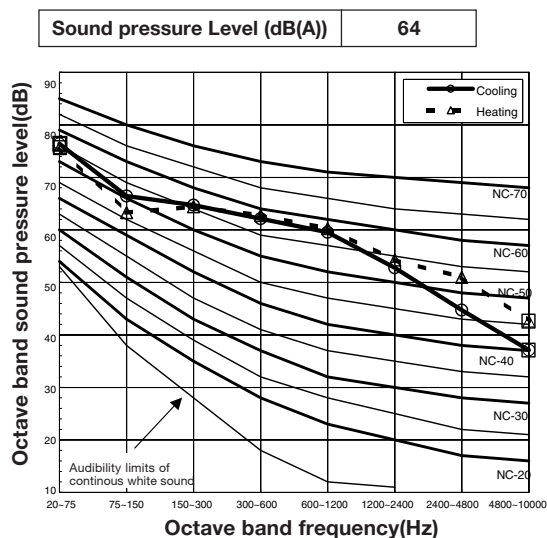


Sound level data (NC CURVE)

Sound level values shown are based on a measurement in a non resonant room.


MMY-AP3801HT8, AP3801HT7, AP3801T8

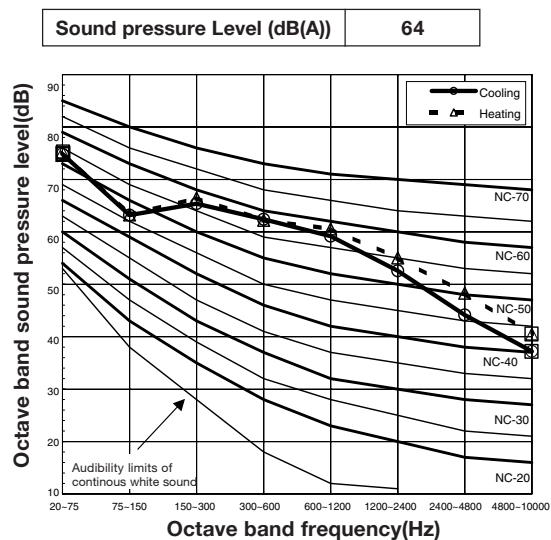


MMY-AP4001HT8, AP4001HT7, AP4001T8

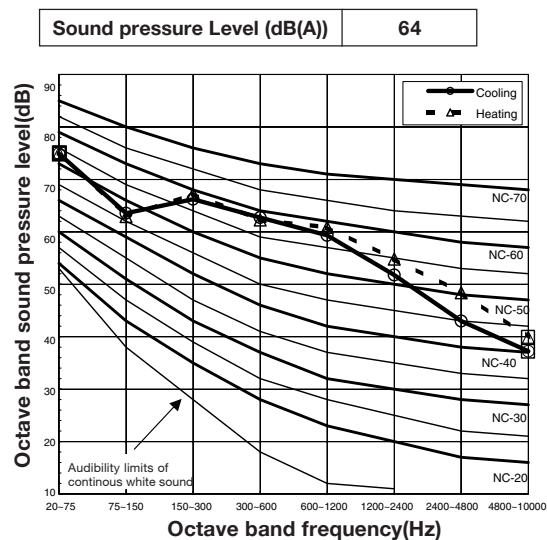


MMY-AP4201HT8, AP4201HT7, AP4201T8

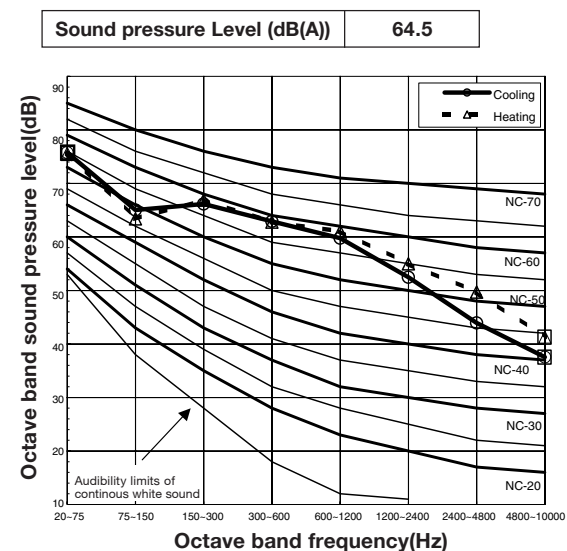


MMY-AP4401HT8, AP4401HT7, AP4401T8

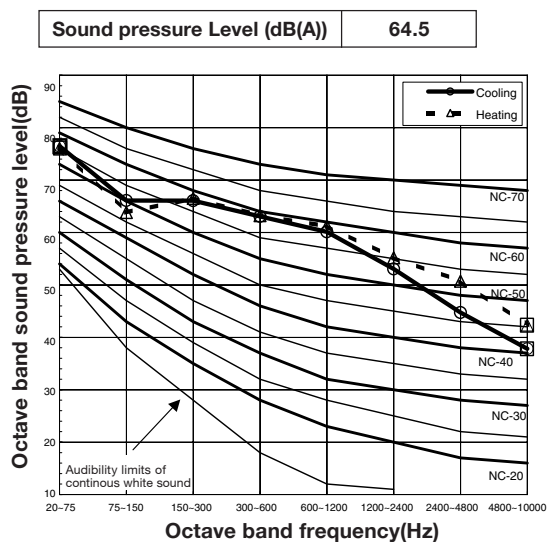

MMY-AP4601HT8, AP4601HT7, AP4601T8

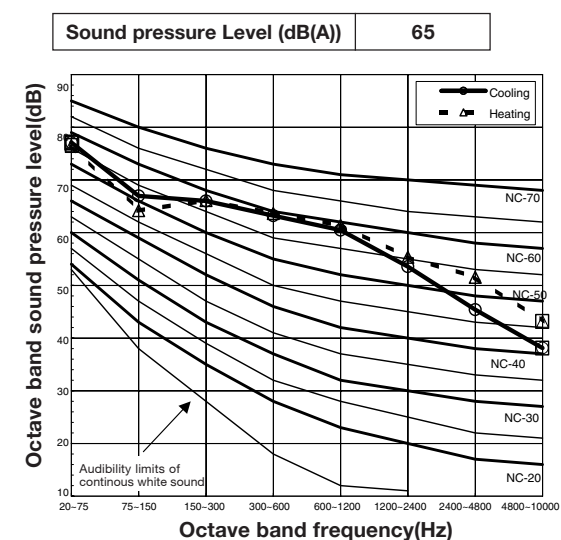

MMY-AP4801HT8, AP4801HT7, AP4801T8

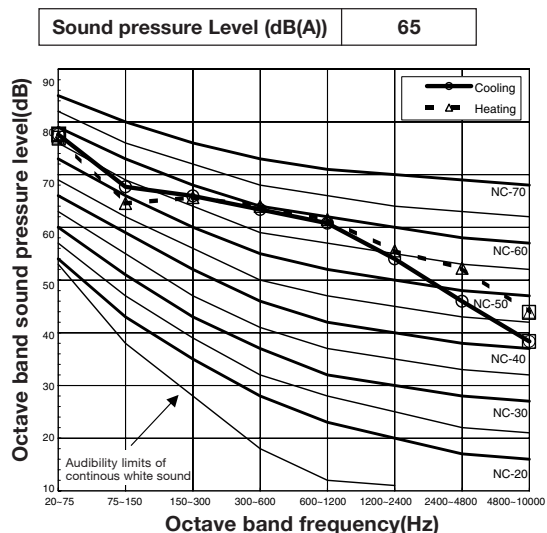



15


Dimensional drawing

15 Dimensional drawing


Indoor unit

• 4-way Air Discharge Cassette Type

MMU-AP0091H to P0561H

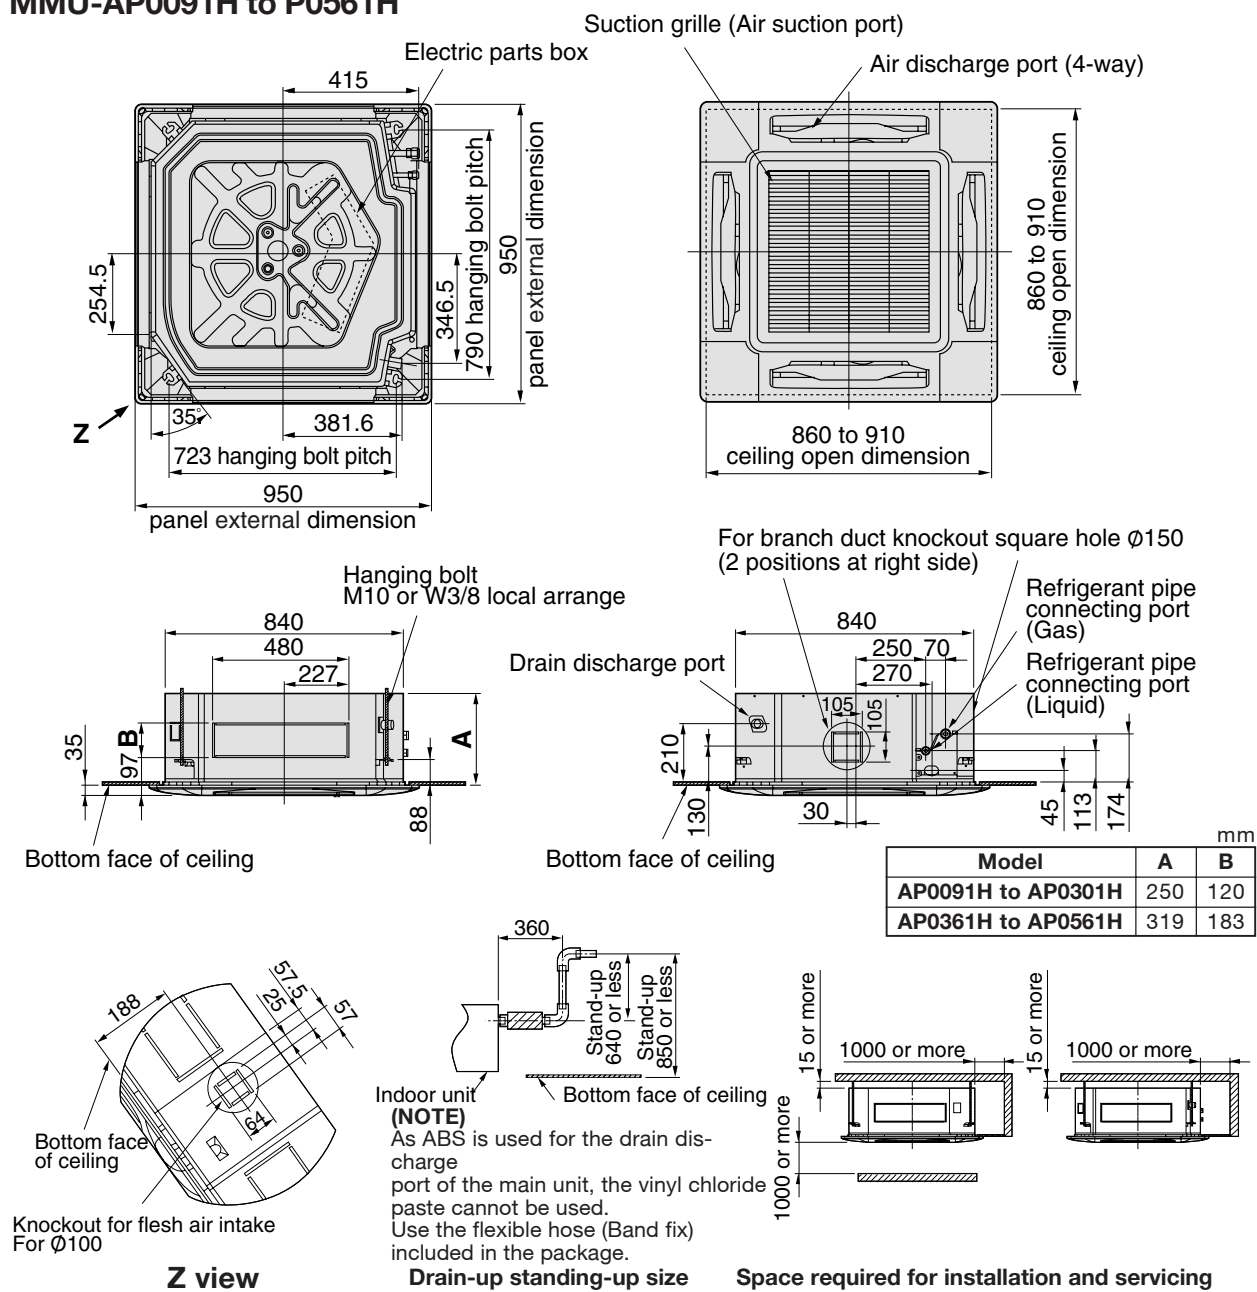


- **Wired remote controller**
RBC-AMT21E
RBC-AMT31E
- **Simple wired remote controller**
RBC-AS21E
RBC-AS21E2
- **Wireless remote controller kit**
TCB-AX21U(W)-E
TCB-AX21U(W)-E2
- **Weekly timer application**
RBC-AMT31E and RBC-EXW21E2






• 2-way Air Discharge Cassette Type


MMU-AP0071WH, AP0091WH, AP0121WH

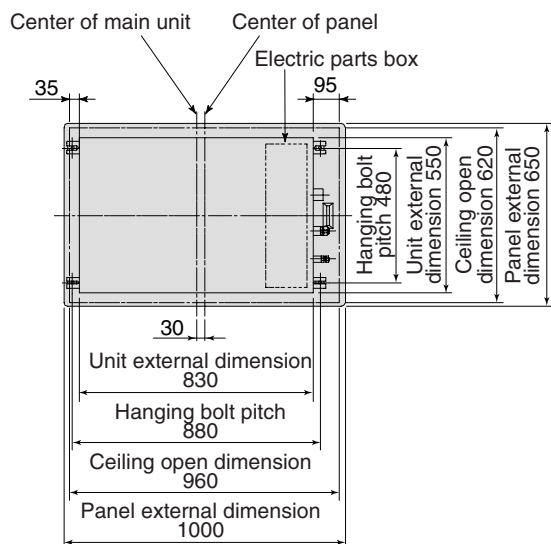


Z view

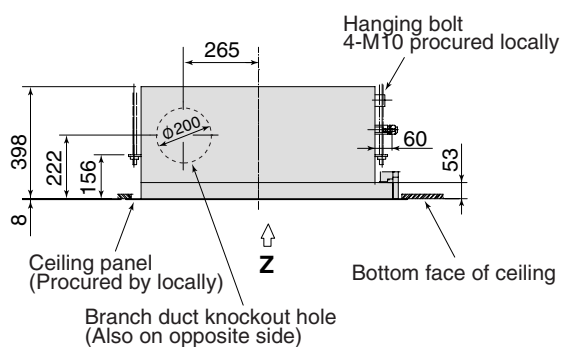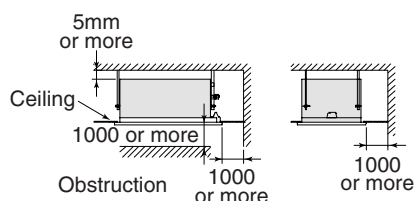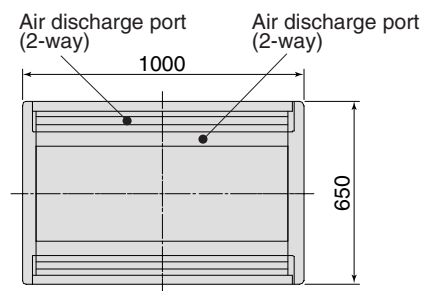


Space required for installation and servicing






- **Wired remote controller**
RBC-AMT21E
RBC-AMT31E
- **Simple wired remote controller**
RBC-AS21E
RBC-AS21E2
- **Wireless remote controller kit**
TCB-AX21E
TCB-AX21E2
- **Weekly timer application**
RBC-AMT31E and RBC-EXW21E2

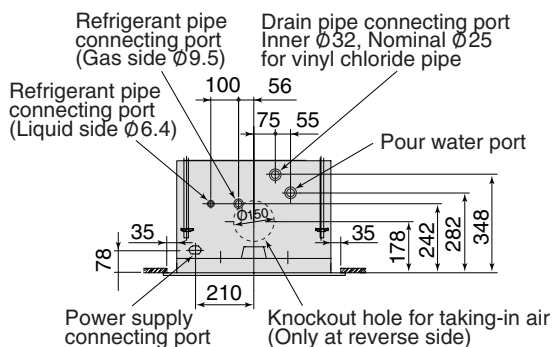


MMU-AP0151WH, AP0181WH, AP0241WH, AP0271WH, AP0301WH

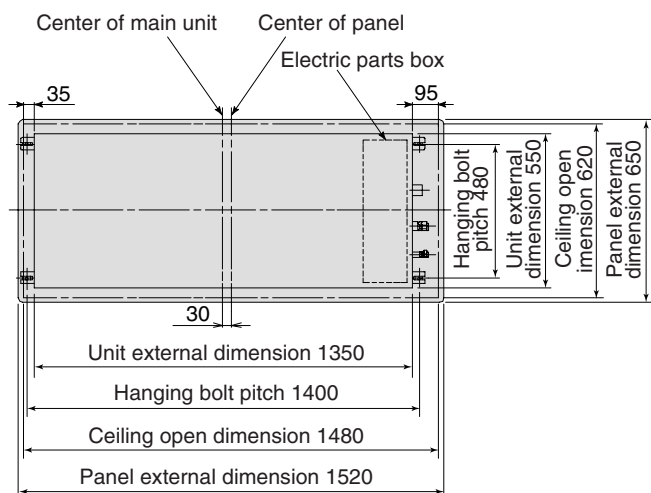


Z view

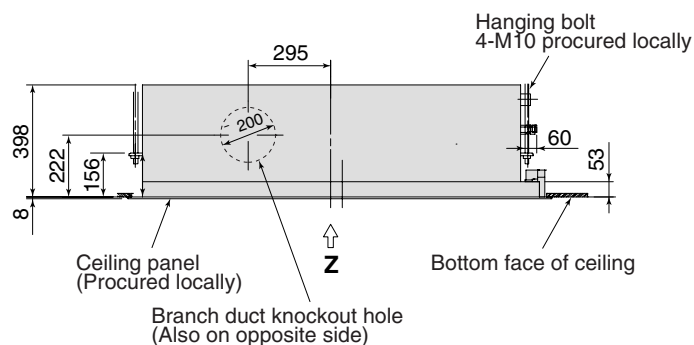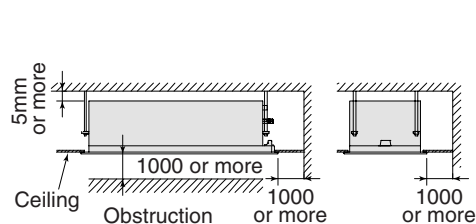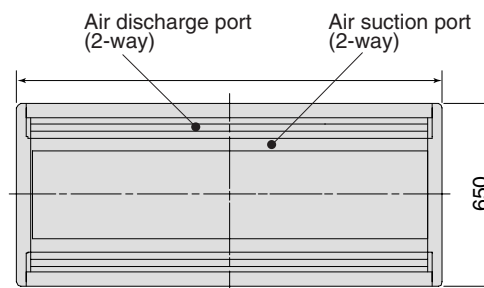

Space required for installation and servicing





- **Wired remote controller**
RBC-AMT21E
RBC-AMT31E
- **Simple wired remote controller**
RBC-AS21E
RBC-AS21E2
- **Wireless remote controller kit**
TCB-AX21E
TCB-AX21E2
- **Weekly timer application**
RBC-AMT31E and RBC-EXW21E2



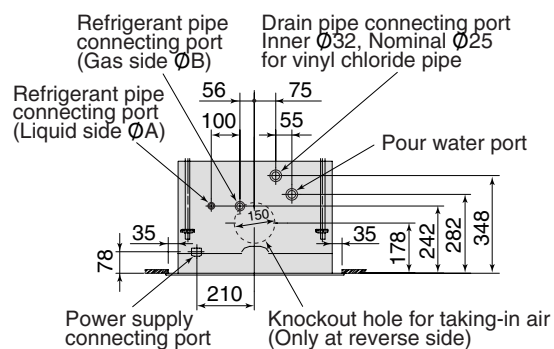


Model	A	B
MMU-AP0151WH to AP0181WH	Ø 6.4	Ø 12.7
MMU-AP0241WH to AP0301WH	Ø 9.5	Ø 15.9

MMU-AP0481WH

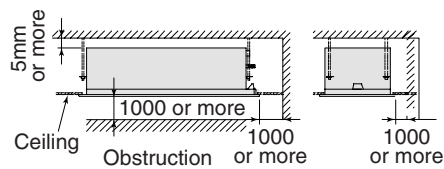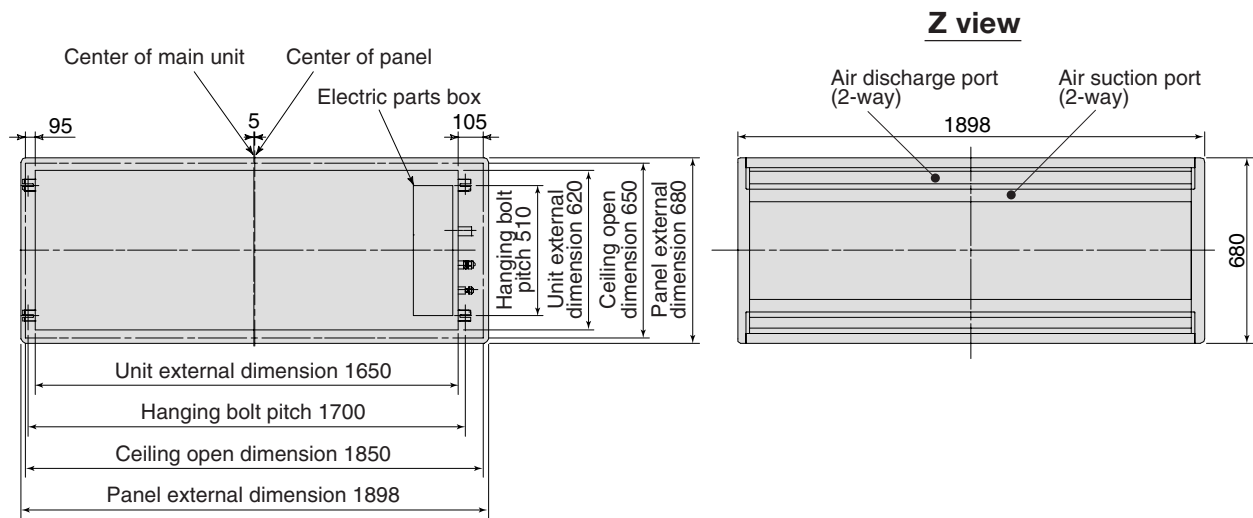


Space required for installation and servicing

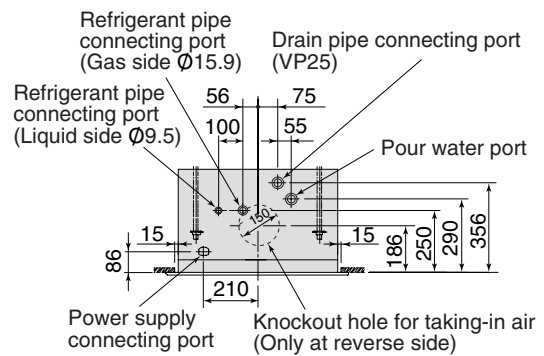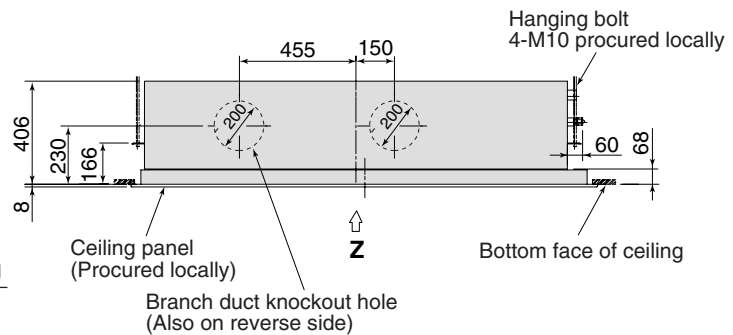

- **Wired remote controller**
RBC-AMT21E
RBC-AMT31E
- **Simple wired remote controller**
RBC-AS21E
RBC-AS21E2
- **Wireless remote controller kit**
TCB-AX21E
TCB-AX21E2
- **Weekly timer application**
RBC-AMT31E and RBC-EXW21E2

• 1-way Air Discharge Cassette Type


MMU-AP0071YH, AP0091YH, AP0121YH

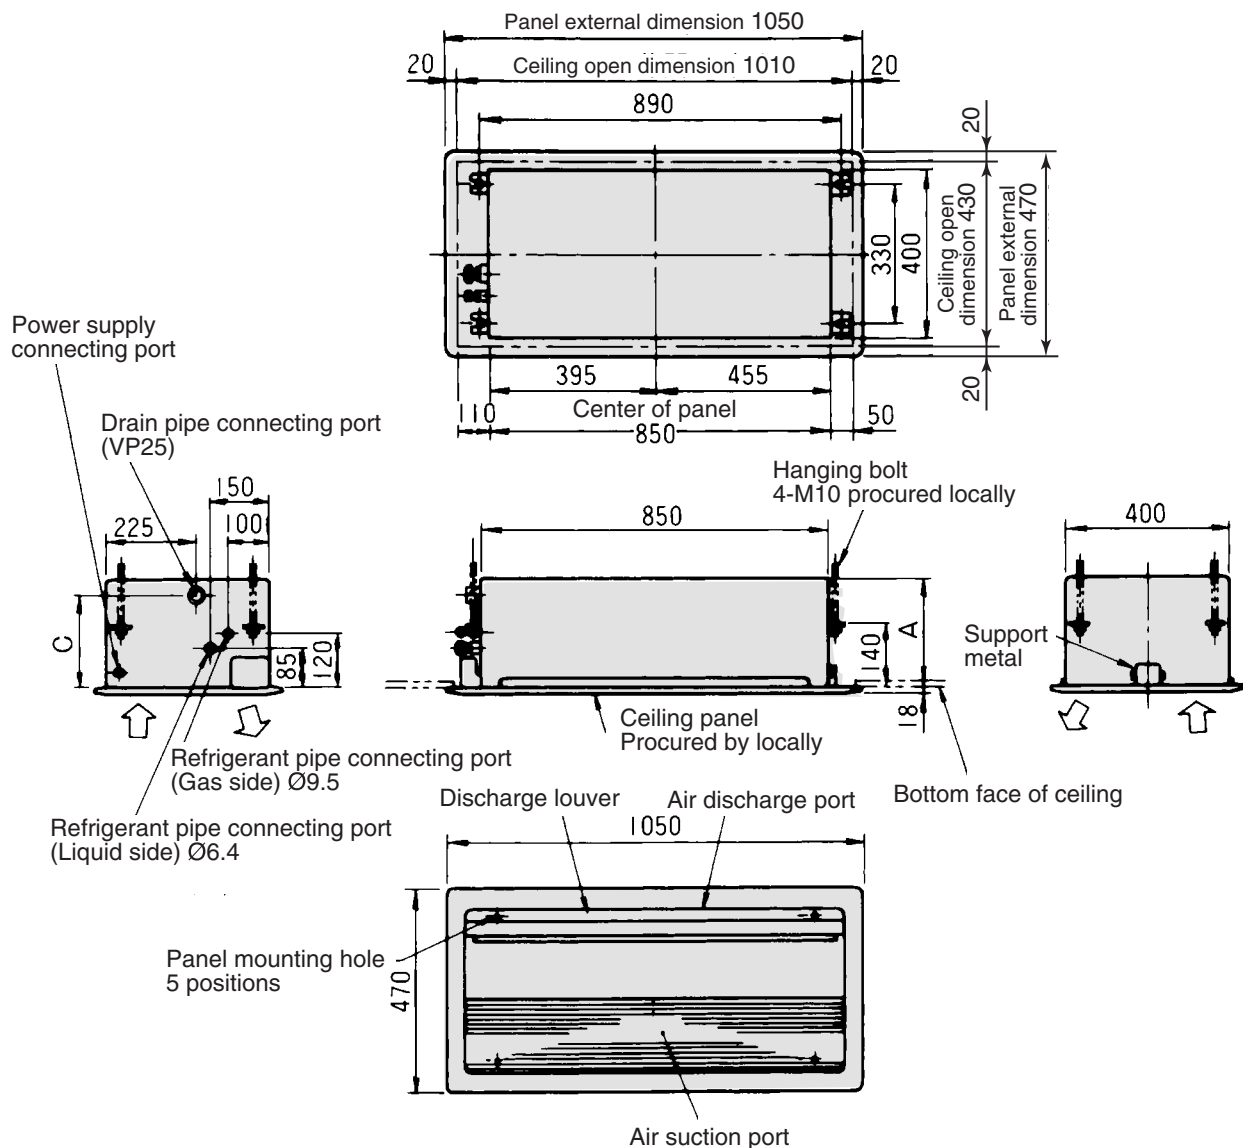

Dimensions


Model MMU-	A	B	C
AP0071YH, AP0091YH, AP0121YH	235	245	200

- **Wired remote controller**
RBC-AMT21E
RBC-AMT31E
- **Simple wired remote controller**
RBC-AS21E
RBC-AS21E2
- **Wireless remote controller kit**
TCB-AX21E
TCB-AX21E2
- **Weekly timer application**
RBC-AMT31E and RBC-EXW21E2

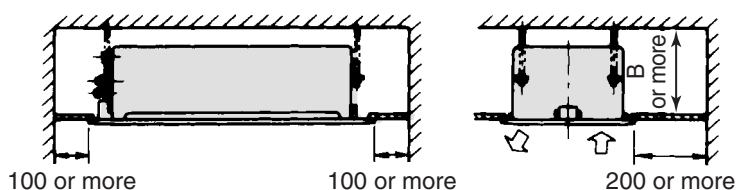

Space required for installation and servicing


MMU-AP0151SH, AP0181SH, AP0241SH

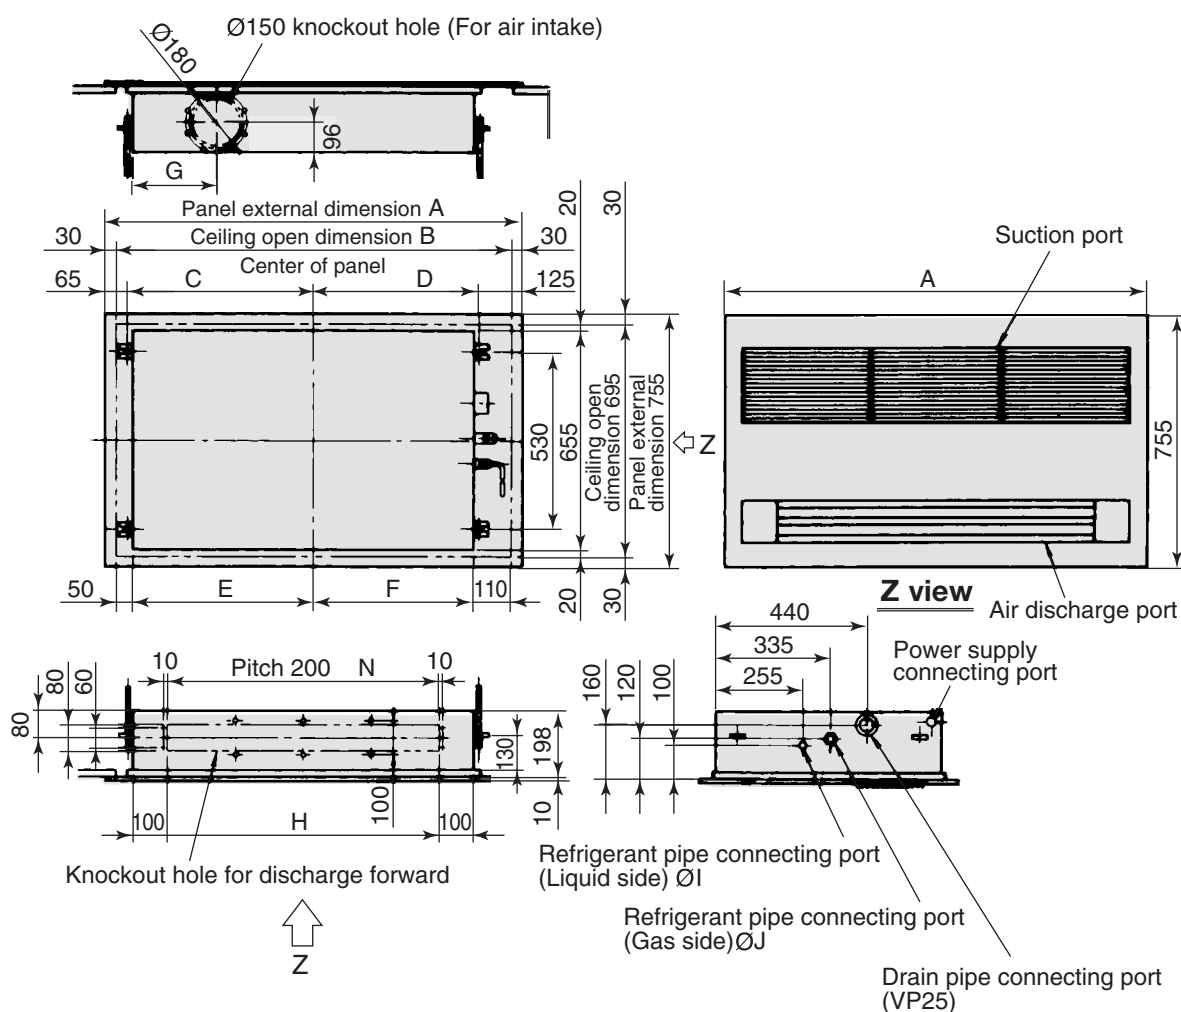

Dimensions

Model	MMU-	A	B	C	D	E	F	G	H	I	J	N
AP0151SH, AP0181SH		1220	1160	545	485	530	470	254	800	6.4	12.7	4
AP0241SH		1420	1360	645	585	630	570	460	1000	9.5	15.9	5


- **Wired remote controller**
RBC-AMT21E
RBC-AMT31E
- **Simple wired remote controller**
RBC-AS21E
RBC-AS21E2
- **Wireless remote controller kit**
TCB-AX21E
TCB-AX21E2
- **Weekly timer application**
RBC-AMT31E and RBC-EXW21E2

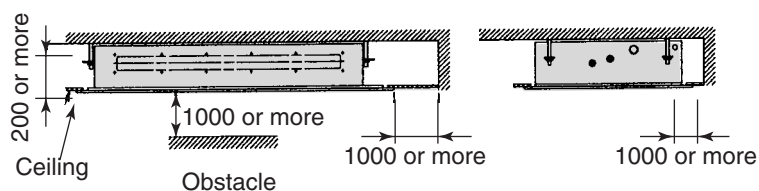

Space required for installation and servicing

• Concealed Duct Standard Type

MMD-AP0071BH, AP0091BH, AP0121BH, AP0151BH, AP0181BH, AP0241BH, AP0271BH, AP0301BH, AP0361BH, AP0481BH, AP0561BH

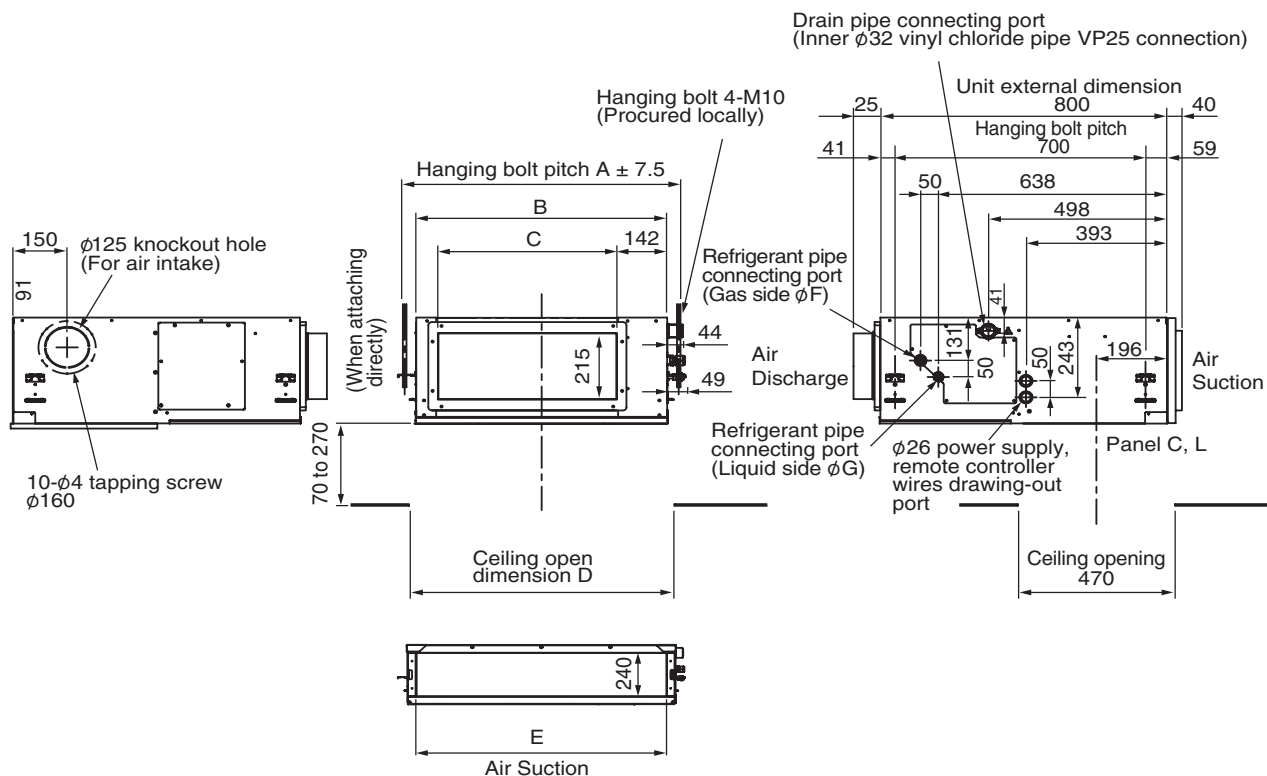


Model	MMD-	A	B	C	D	E	F	G
AP0071BH, AP0091BH, AP0121BH		616	550	350	600	470	9.5	6.4
AP0151BH, AP0181BH		766	700	500	750	620	12.7	9.4
AP0241BH, AP0271BH, AP0301BH		1066	1000	800	1050	920	15.9	9.5
AP0361BH, AP0481BH, AP0561BH		1416	1350	1150	1400	1270	15.9	9.5

(Note)


Two of f high efficiency filters available.
Deodorant filter not available.

(Note)

Be sure to create a check port at position A as indicated in the following figure. This is for maintenance of the equipment.

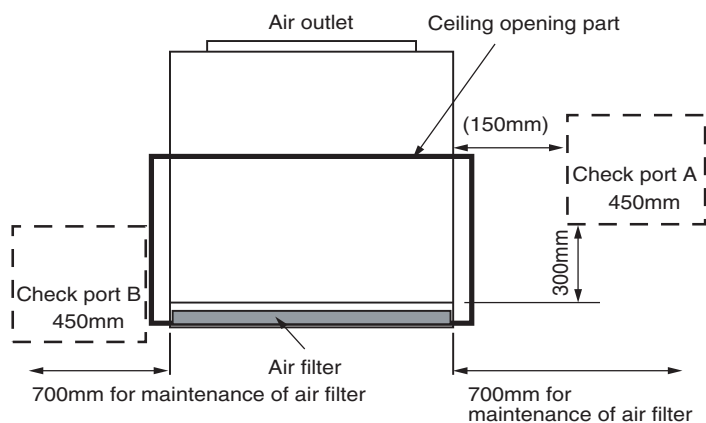


- **Wired remote controller**
RBC-AMT21E
RBC-AMT31E
- **Simple wired remote controller**
RBC-AS21E
RBC-AS21E2
- **Wireless remote controller kit**
TCB-AX21E
TCB-AX21E2
- **Weekly timer application**
RBC-AMT31E and RBC-EXW21E2

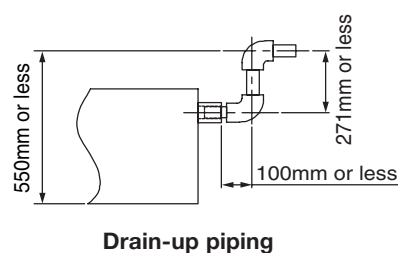

• Concealed Duct High Static Pressure Type

MMD-AP0181H, AP0241H, AP0271H, AP0361H, AP0481H, AP0721H, AP0961H

MMD-AP0181H to AP0361H

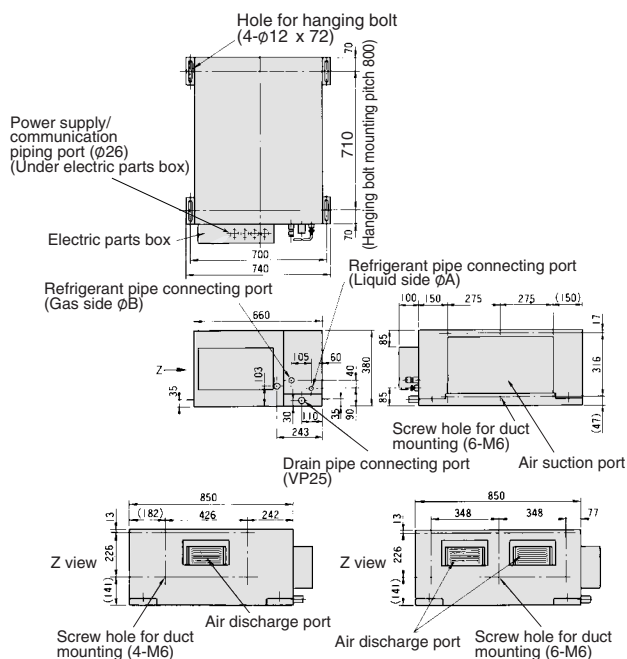


AP0181H to AP0271H type

AP0361H type


Model	MMD-	A	B
AP0181H		6.4	12.7
AP0241H, AP0271H, AP0361H, AP0481H		9.5	15.9

MMD-AP0721H, AP0961H

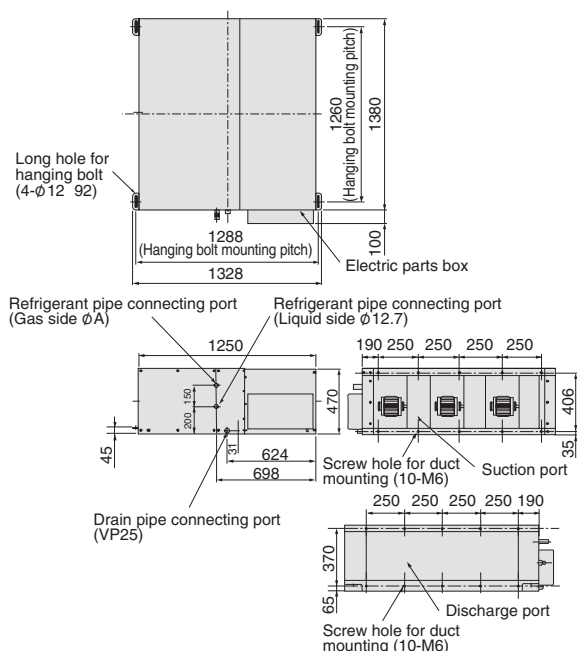


Model	MMD-	Gas pipe φA
AP0721H		φ 22.2
AP0961H		φ 22.2

MMD-AP0481H

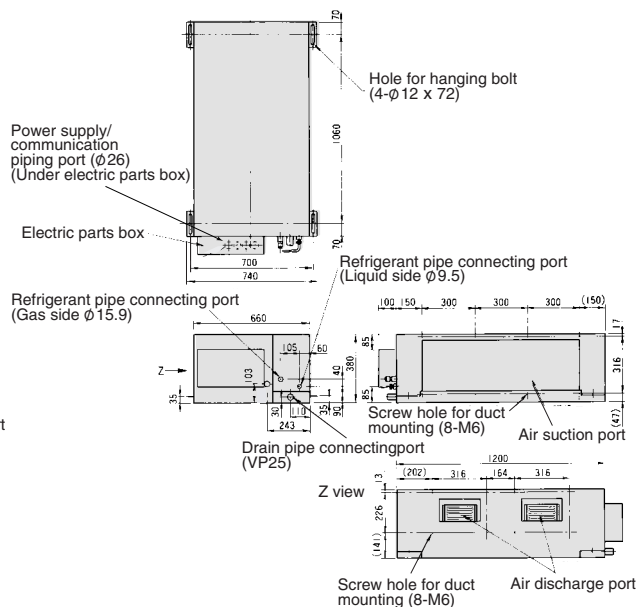

Space required for installation and servicing *1


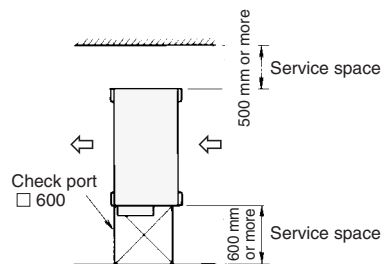


*1 Service space requirement for MMD-AP0721H and AP0961H are different from those in the above figure. For details make enquiries to your dealer.




- **Wired remote controller**
RBC-AMT21E
RBC-AMT31E
- **Simple wired remote controller**
RBC-AS21E
RBC-AS21E2
- **Wireless remote controller kit**
TCB-AX21E
TCB-AX21E2
- **Weekly timer application**
RBC-AMT31E and RBC-EXW21E2

• Under Ceiling Type

MMC-AP0151H, AP0181H, AP0241H, AP0271H, AP0361H, AP0481H

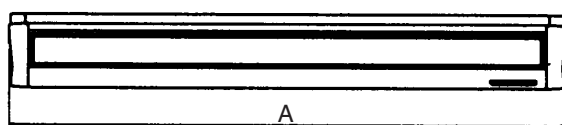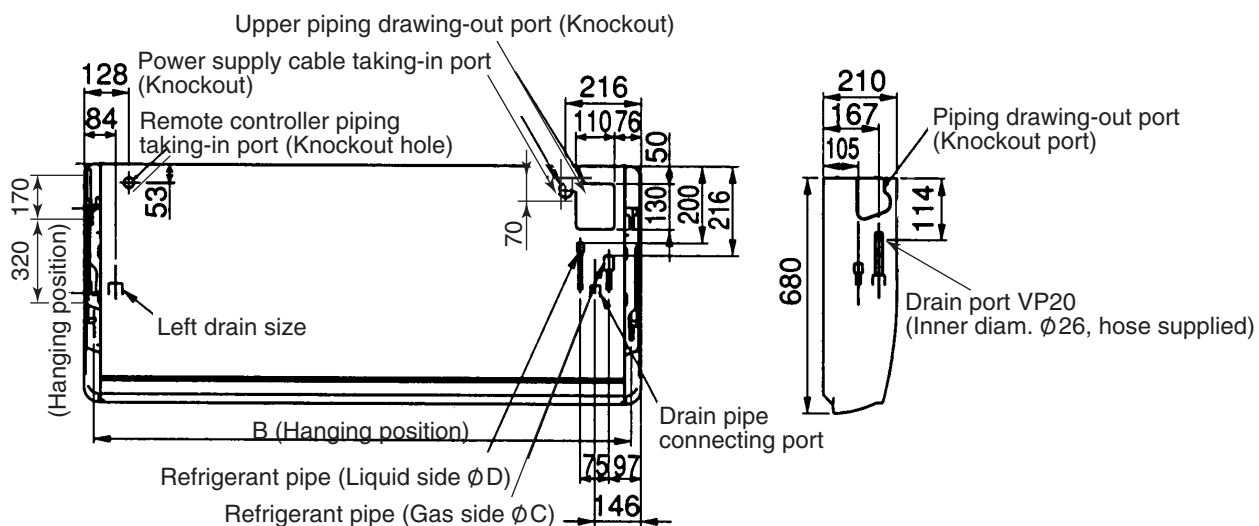


Model	MMC-	A	B	C	D
AP0151H, AP0181H		910	855	12.7	6.4
AP0241H to AP0271H		1180	1125	15.9	9.5
AP0361H, AP0481H		1595	1540	15.9	9.5

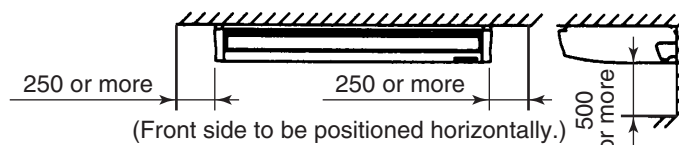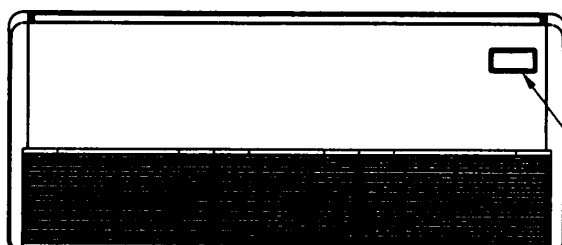


Space required for installation and servicing

- **Wired remote controller**
RBC-AMT21E
RBC-AMT31E
- **Simple wired remote controller**
RBC-AS21E
RBC-AS21E2
- **Wireless remote controller kit**
RBC-AX22CE
RBC-AX22CE2
- **Weekly timer application**
RBC-AMT31E and RBC-EXW21E2

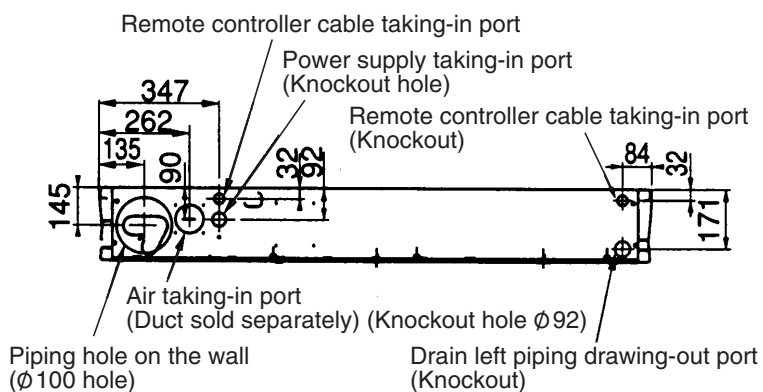

• High Wall Type


MMK-AP0071H, AP0091H, AP0121H

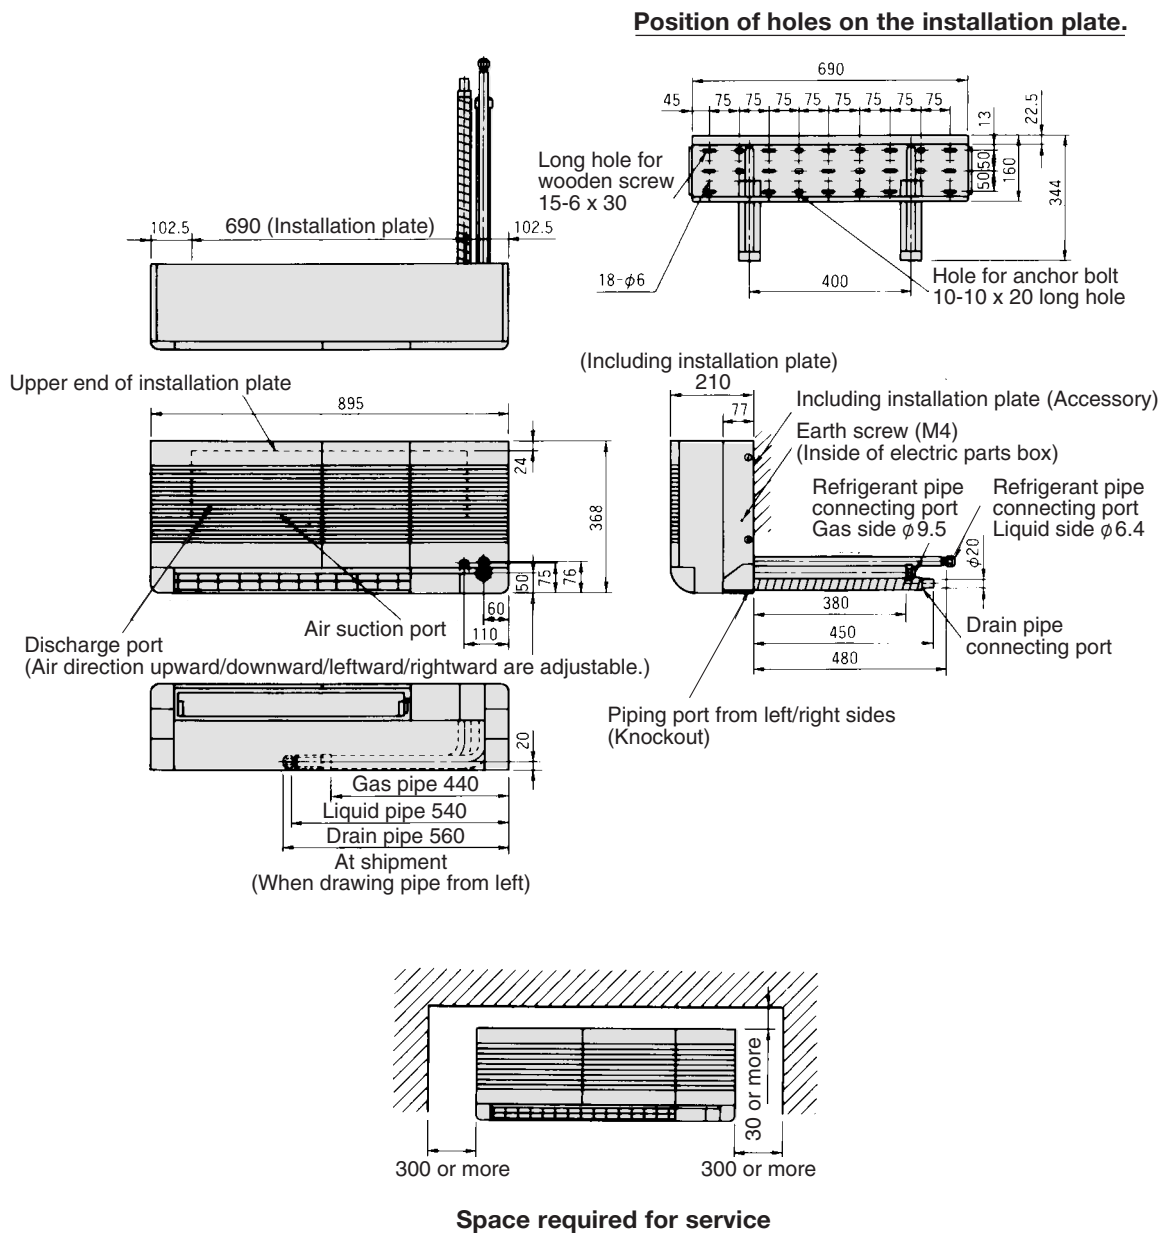


- **Wired remote controller**
RBC-AMT21E
RBC-AMT31E
- **Simple wired remote controller**
RBC-AS21E
RBC-AS21E2
- **Wireless remote controller kit**
TCB-AX21E
TCB-AX21E2
- **Weekly timer application**
RBC-AMT31E and RBC-EXW21E2

MMK-AP0151H, AP0181H



Position of holes on the installation plate

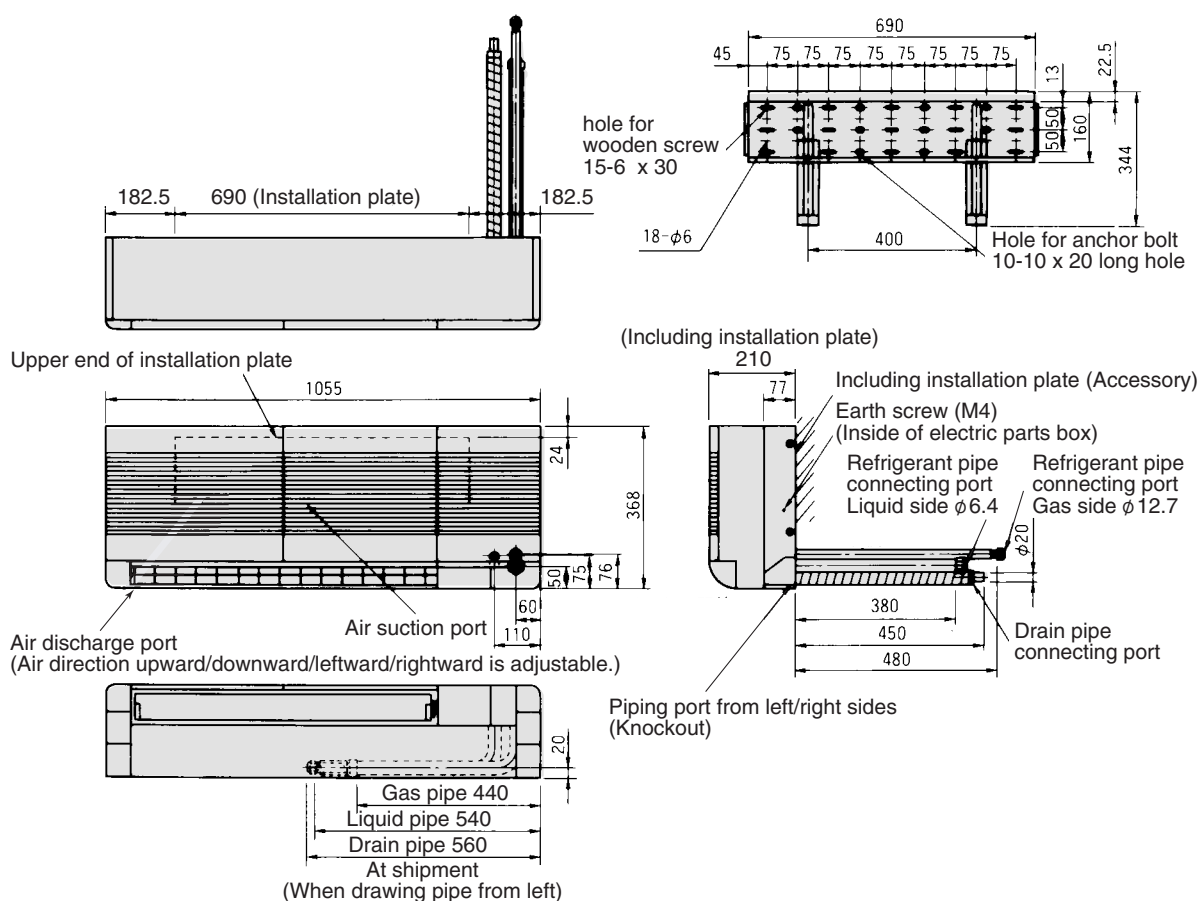

- **Wired remote controller**
RBC-AMT21E
RBC-AMT31E
- **Simple wired remote controller**
RBC-AS21E
RBC-AS21E2
- **Wireless remote controller kit**
TCB-AX21E
TCB-AX21E2
- **Weekly timer application**
RBC-AMT31E and RBC-EXW21E2

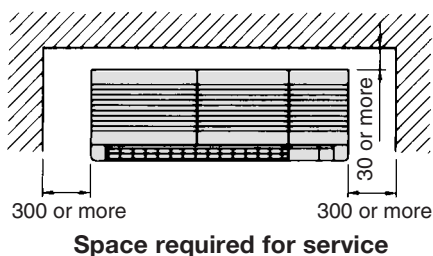


MMK-AP0241H

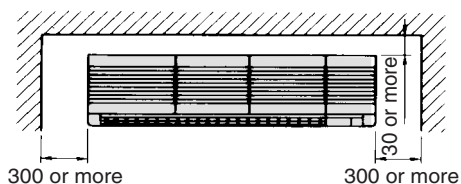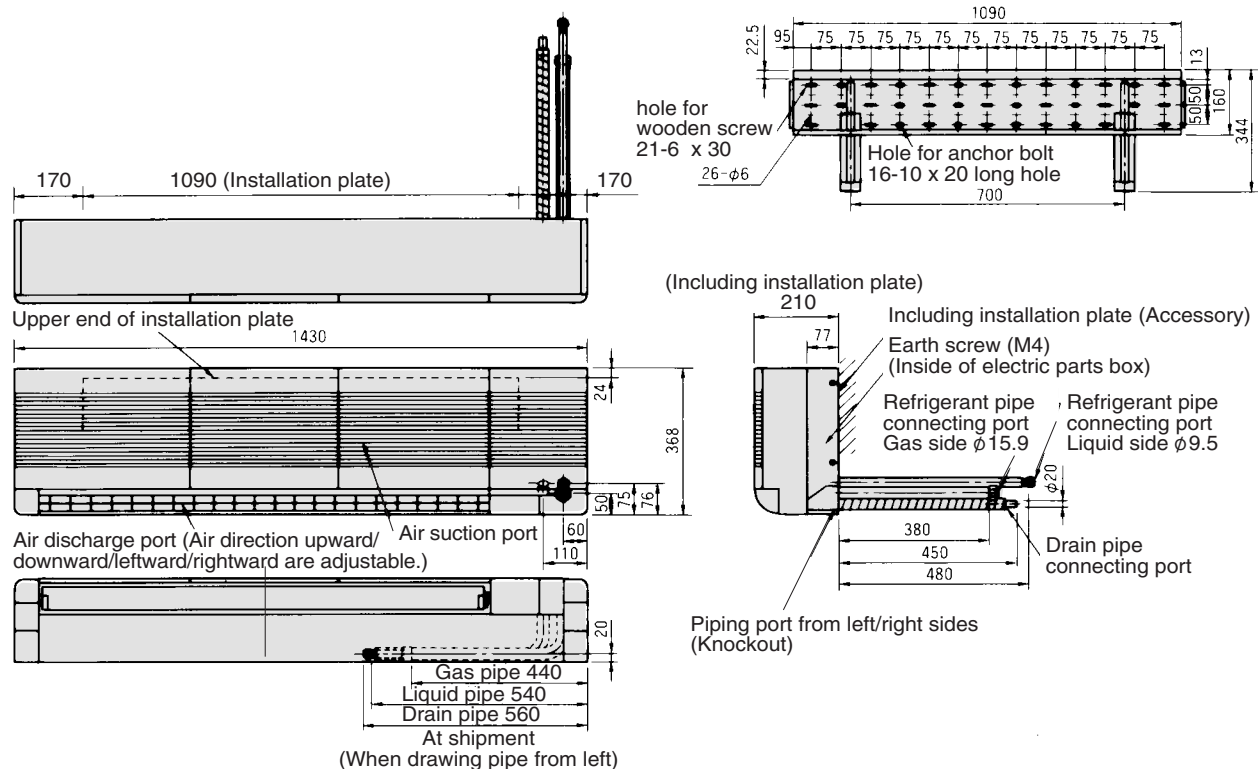

- **Wired remote controller**
RBC-AMT21E
RBC-AMT31E
- **Simple wired remote controller**
RBC-AS21E
RBC-AS21E2
- **Wireless remote controller kit**
TCB-AX21E
TCB-AX21E2
- **Weekly timer application**
RBC-AMT31E and RBC-EXW21E2

• Floor Standing Cabinet Type



MML-AP0071H, AP0091H, AP0121H, AP0151H, AP0181H, AP0241H

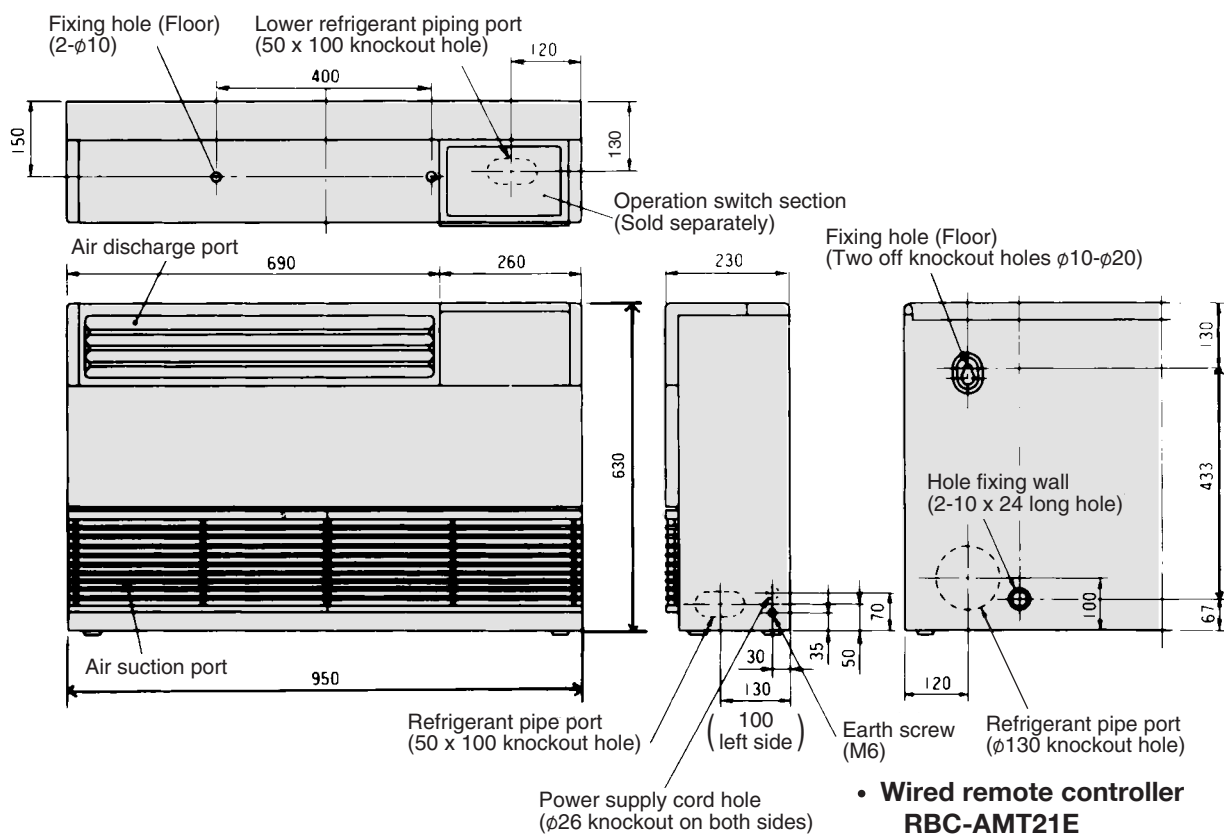

Dimensions

Model MMC-	A	B
AP0071H, AP0091H, AP0121H	$\phi 9.5$	$\phi 6.4$
AP0151H, AP0181H	$\phi 12.7$	$\phi 6.4$
AP0241H	$\phi 15.9$	$\phi 9.5$

- **Wired remote controller**
RBC-AMT21E
RBC-AMT31E
- **Simple wired remote controller**
RBC-AS21E
RBC-AS21E2
- **Wireless remote controller kit**
TCB-AX21E
TCB-AX21E2
- **Weekly timer application**
RBC-AMT31E and
RBC-EXW21E2

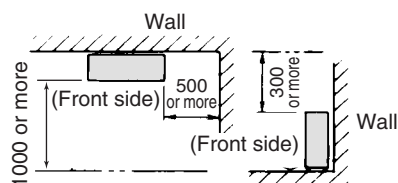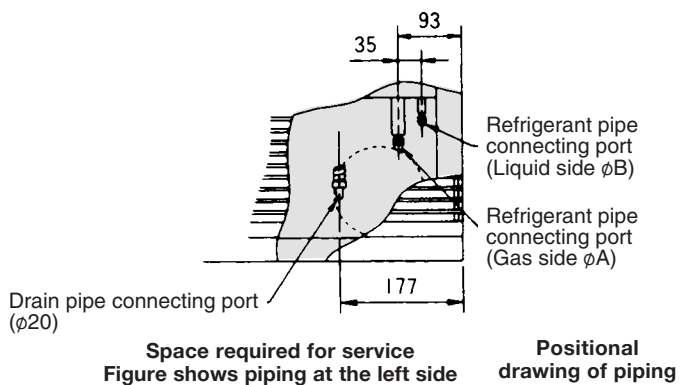

15

[illegible]


No.	Name
①	Pipe connecting port at liquid side (ϕ E)
②	Pipe connecting port at gas side (ϕ F)
③	Drain pipe connecting port (20A)
④	Electric parts box (Earth terminal is on the inside)
⑤	Air filter

Model MML-	A	B	C	D	E	F	G
AP0071BH, AP0091BH, AP0121BH	610	580	550	4	6.4	9.5	5
AP0151BH, AP0181BH	910	880	850	7		12.7	8
AP0241BH					9.5	15.9	

- 178



• Floor Standing Type

MMF-AP0151H, AP0181H, AP0241H, AP0271H

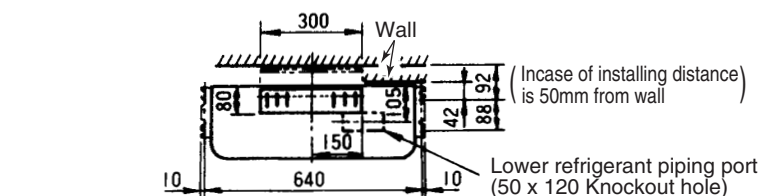


Dimensions


Model	A	B
MMF-AP0151H, AP0181H	Ø 12.7	Ø 6.4
MMF-AP0241H, AP0271H	Ø 15.7	Ø 9.5

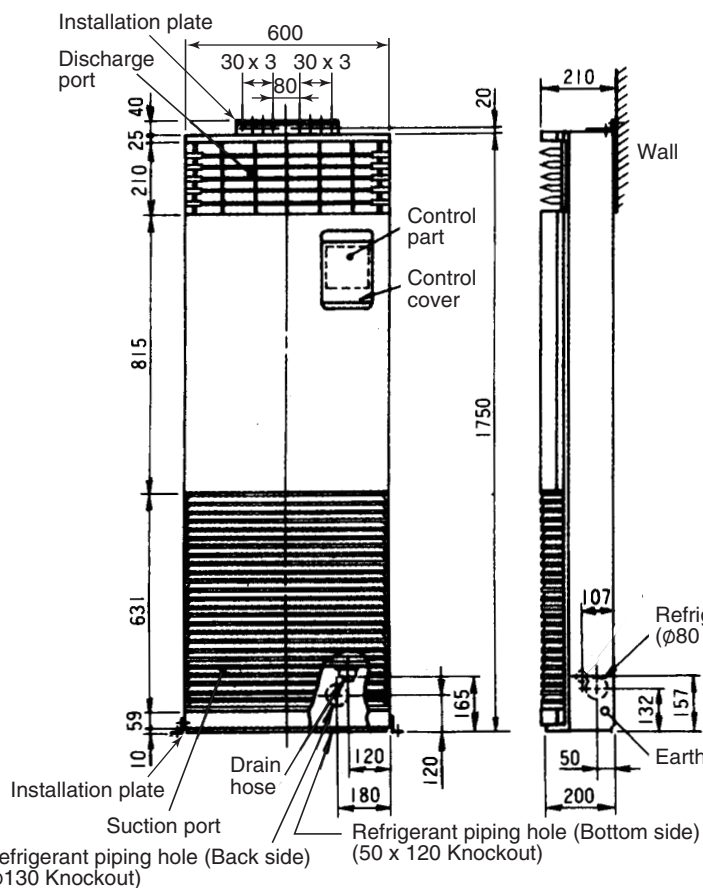

Space required for service (In case of right side piping)

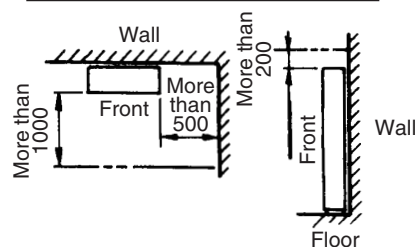


Refrigerant piping position

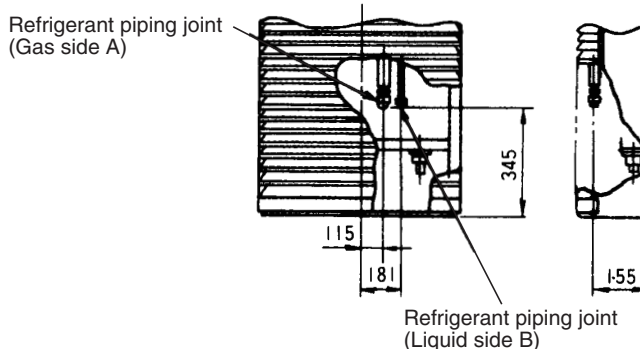


- **Wired remote controller**
RBC-AMT21E
RBC-AMT31E
- **Simple wired remote controller**
RBC-AS21E
RBC-AS21E2
- **Wireless remote controller kit**
TCB-AX21E
TCB-AX21E2
- **Weekly timer application**
RBC-AMT31E and RBC-EXW21E2


Details of hole for back side piping

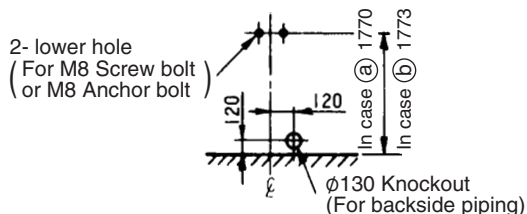


Details of hole for lower side piping

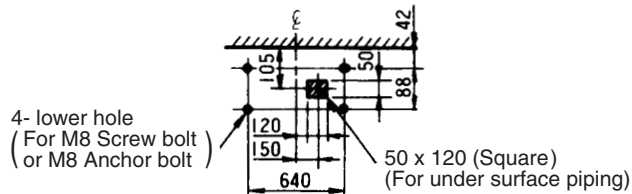


MMF-AP0361H, AP0481H, AP0561H

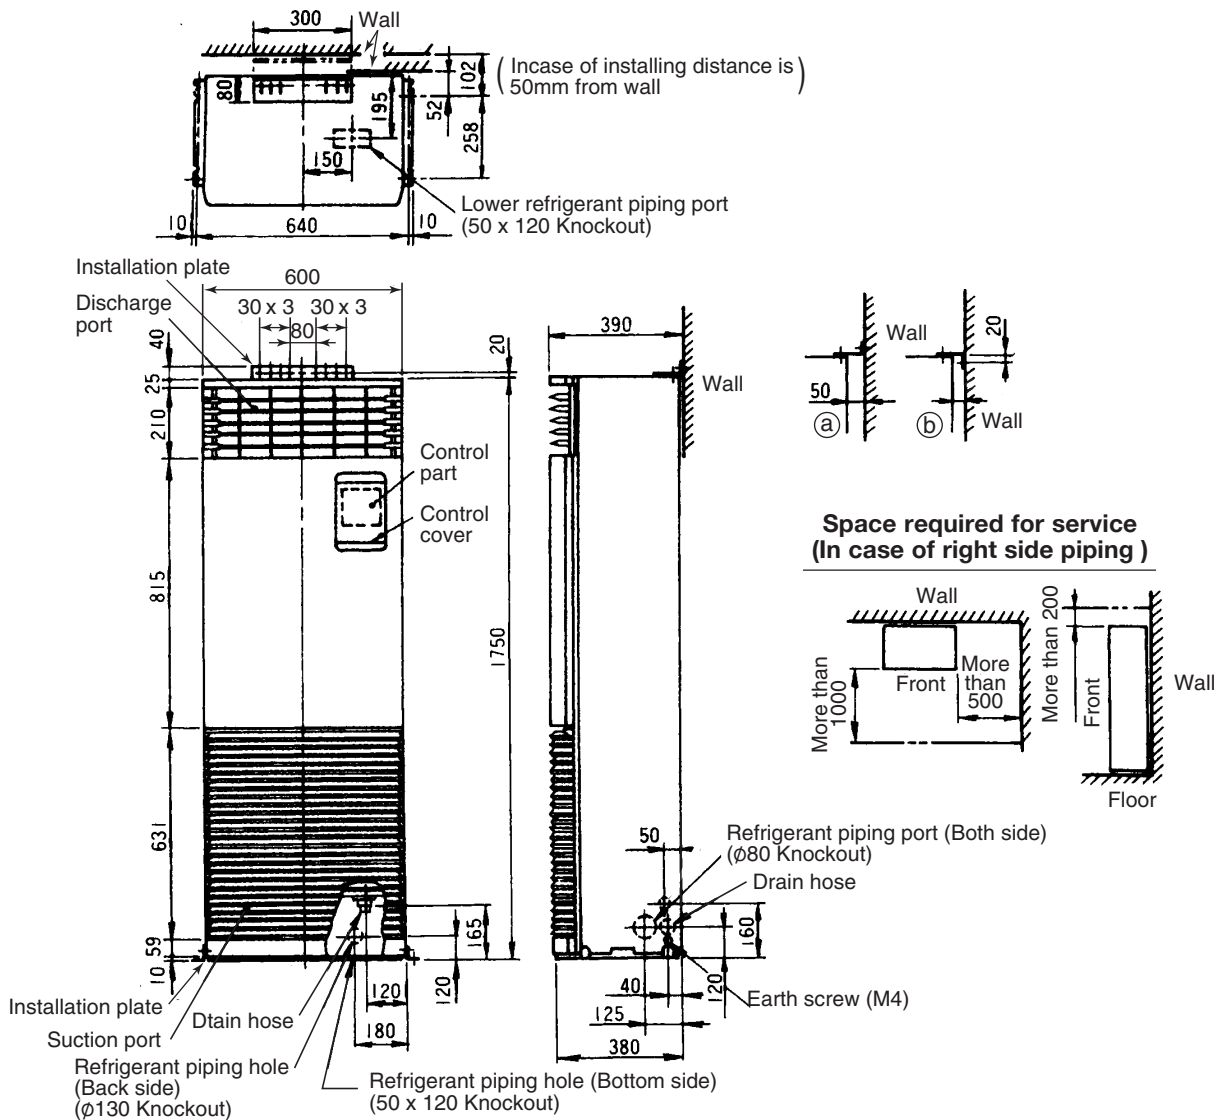


Space required for service (In case of right side piping)

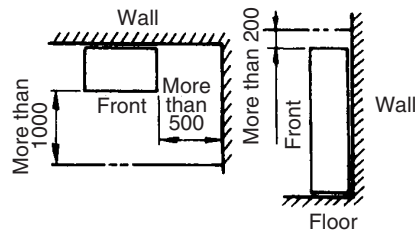


Refrigerant piping position

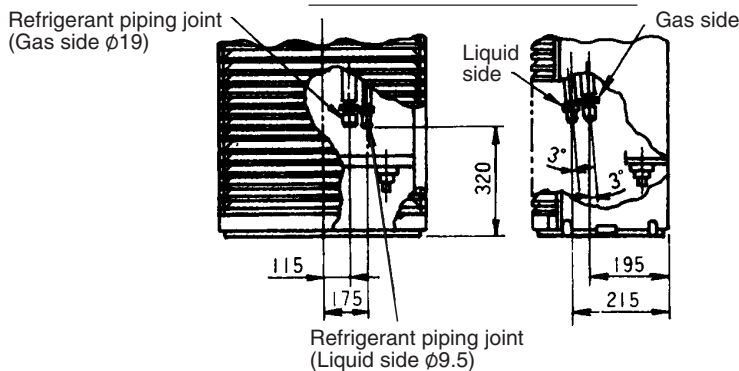

Details of hole for back side piping

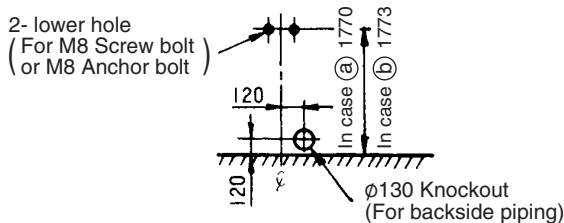


Details of hole for lower side piping

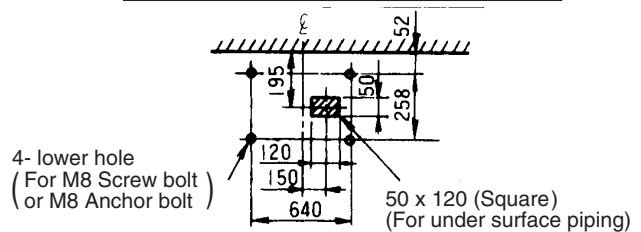


- Wired remote controller
RBC-AMT21E
RBC-AMT31E
- Simple wired remote controller
RBC-AS21E
RBC-AS21E2
- Wireless remote controller kit
TCB-AX21E
TCB-AX21E2
- Weekly timer application
RBC-AMT31E and RBC-EXW21E2

MMY-MAP0501T8, MAP0601T8, MAP0801T8, MAP1001T8, MAP1201T8
MMY-MAP0501HT8, MAP0601HT8, MAP0801HT8, MAP1001HT8, MAP1201HT8
MMY-MAP0501HT7, MAP0601HT7, MAP0801HT7, MAP1001HT7, MAP1201HT7

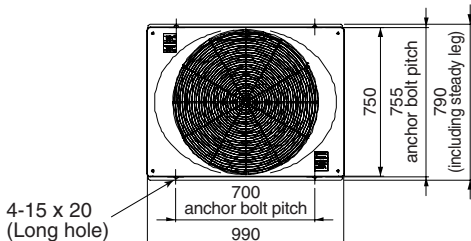


(NOTES)

1. If there is an obstacle above the outdoor unit, ensure there is a minimum space of 2000mm or more above the unit.
2. Any obstacle around the perimeter of the outdoor unit must be kept 800mm or less.
3. Draw out the locally supplied piping at the front of the outdoor unit horizontally, keep a minimum of 500mm or more. between the outdoor unit and traversing pipe. If the pipework is to be installed in this method.




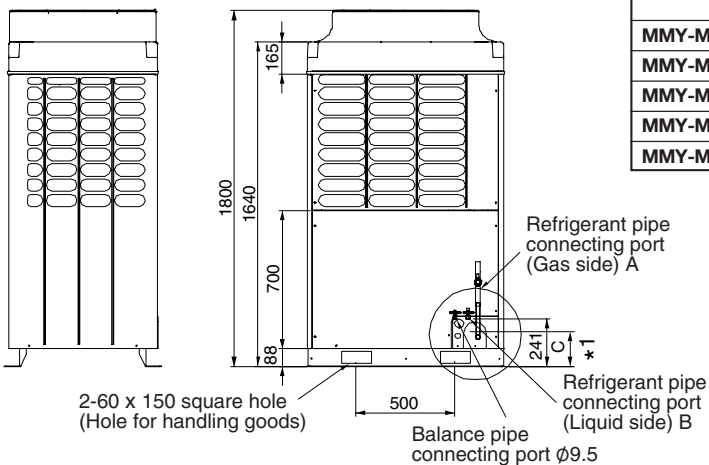


Applied model	A	B	C
MMY-MAP0501T8, MAP0501HT8, MAP0501HT7	ϕ 15.9	ϕ 9.5	280
MMY-MAP0601T8, MAP0601HT8, MAP0601HT7	ϕ 19.1	ϕ 9.5	280
MMY-MAP0801T8, MAP0801HT8, MAP0801HT7	ϕ 22.2	ϕ 12.7	(205)
MMY-MAP1001T8, MAP1001HT8, MAP1001HT7	ϕ 22.2	ϕ 12.7	(205)
MMY-MAP1201T8, MAP1201HT8, MAP1201HT7	ϕ 28.6	ϕ 12.7	(205)

*1 Cutting position of L-shape pipe when pipe at gas side is connected
(Recommended pipe connecting position)

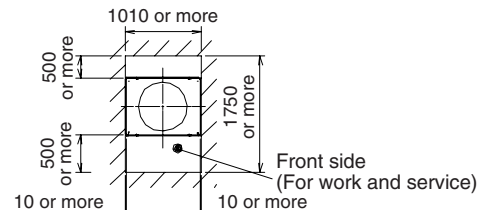

Space required for service

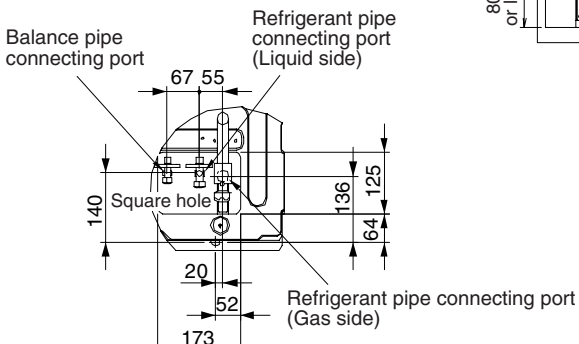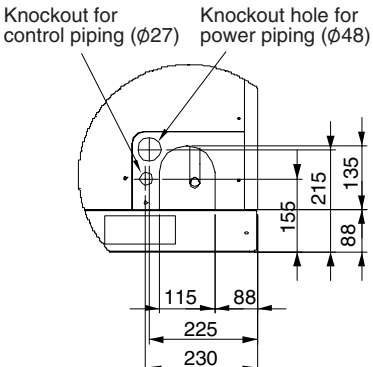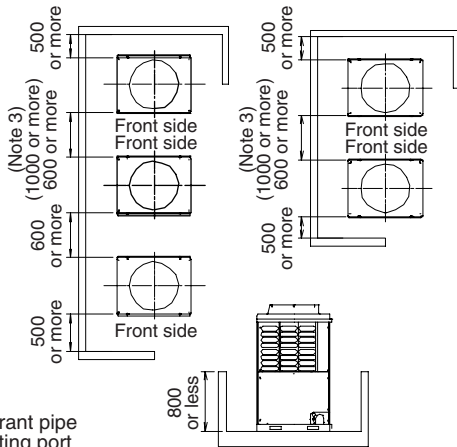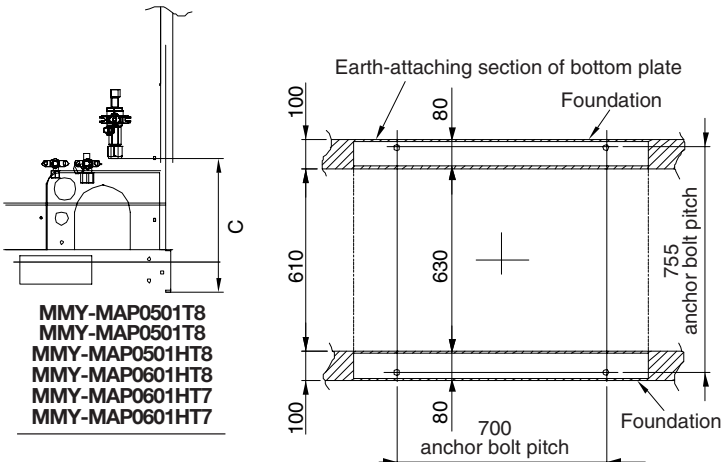

Details of front pipe/cabling holes


Details of hole for piping at lower side (Plane view)

Two units connected


MMY-AP1401T8, AP1601T8, AP1801T8, AP2001T8, AP2211T8, AP2411T8
 MMY-AP1401HT8, AP1601HT8, AP1801HT8, AP2001HT8, AP2211HT8, AP2411HT8
 MMY-AP1401HT7, AP1601HT7, AP1801HT7, AP2001HT7, AP2211HT7, AP2411HT7

(NOTES)

1. If there is an obstacle above the outdoor unit, ensure there is a minimum space of 2000mm or more above the unit.
2. Any obstacle around the perimeter of the outdoor unit must be kept 800mm or less.
3. Draw out the locally supplied piping at the front of the outdoor unit horizontally, keep a minimum of 500mm or more between the outdoor unit and traversing pipe. If the pipework is to be installed in this method.
4. Arrange each of the outdoor units in order of their capacity. (Header ≥ Follower)

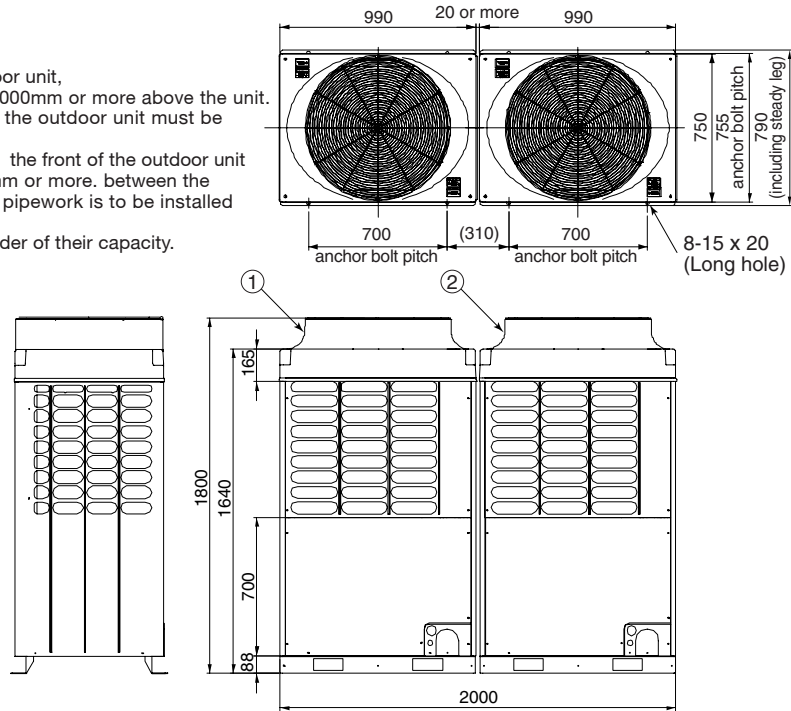

Combination unit	Combination outdoor unit	
	Header	Follower
MMY-AP1401T8, AP1401HT8, AP1401HT7	MMY-MAP0801T8, MAP0801HT8, MAP0801HT7	MMY-MAP0601T8, MAP0601HT8, MAP0601HT7
MMY-AP1601T8, AP1601HT8, AP1601HT7	MMY-MAP0801T8, MAP0801HT8, MAP0801HT7	MMY-MAP0801T8, MAP0801HT8, MAP0801HT7
MMY-AP1801T8, AP1801HT8, AP1801HT7	MMY-MAP1001T8, MAP1001HT8, MAP1001HT7	MMY-MAP0801T8, MAP0801HT8, MAP0801HT7
MMY-AP2001T8, AP2001HT8, AP2001HT7	MMY-MAP1001T8, MAP1001HT8, MAP1001HT7	MMY-MAP1001T8, MAP1001HT8, MAP1001HT7
MMY-AP2211T8, AP2211HT8, AP2211HT7	MMY-MAP1201T8, MAP1201HT8, MAP1201HT7	MMY-MAP1001T8, MAP1001HT8, MAP1001HT7
MMY-AP2411T8, AP2411HT8, AP2411HT7	MMY-MAP1201T8, MAP1201HT8, MAP1201HT7	MMY-MAP1201T8, MAP1201HT8, MAP1201HT7

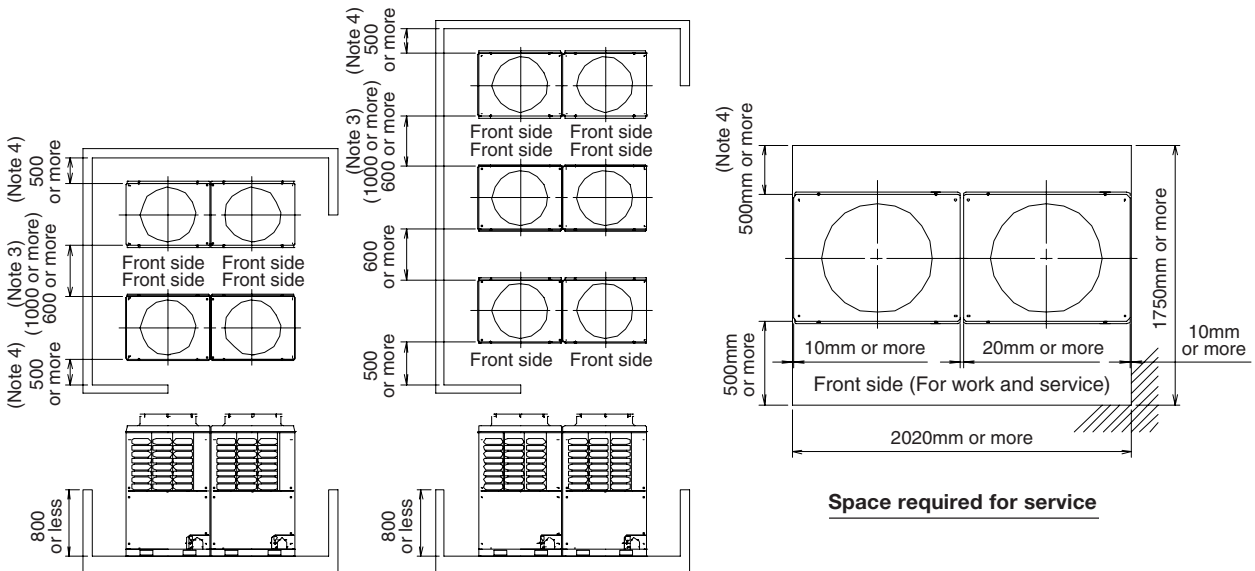

Three units connected


MMY-AP2201T8, AP2401T8, AP2601T8, AP2801T8, AP3001T8, AP3211T8, AP3411T8, AP3611T8

MMY-AP2201HT8, AP2401HT8, AP2601HT8, AP2801HT8, AP3001HT8, AP3211HT8, AP3411HT8, AP3611HT8


MMY-AP2201HT7, AP2401HT7, AP2601HT7, AP2801HT7, AP3001HT7, AP3211HT7, AP3411HT7, AP3611HT7

(NOTES)

1. If there is an obstacle above the outdoor unit, ensure there is a minimum space of 2000mm or more above the unit.
2. Any obstacle around the perimeter of the outdoor unit must be kept 800mm or less.
3. Draw out the locally supplied piping at the front of the outdoor unit horizontally, keep a minimum of 500mm or more. between the outdoor unit and traversing pipe. If the pipework is to be installed in this method.
4. Arrange each of the outdoor units in order of their capacity. (Header ≥ Follower ≥ Follower)

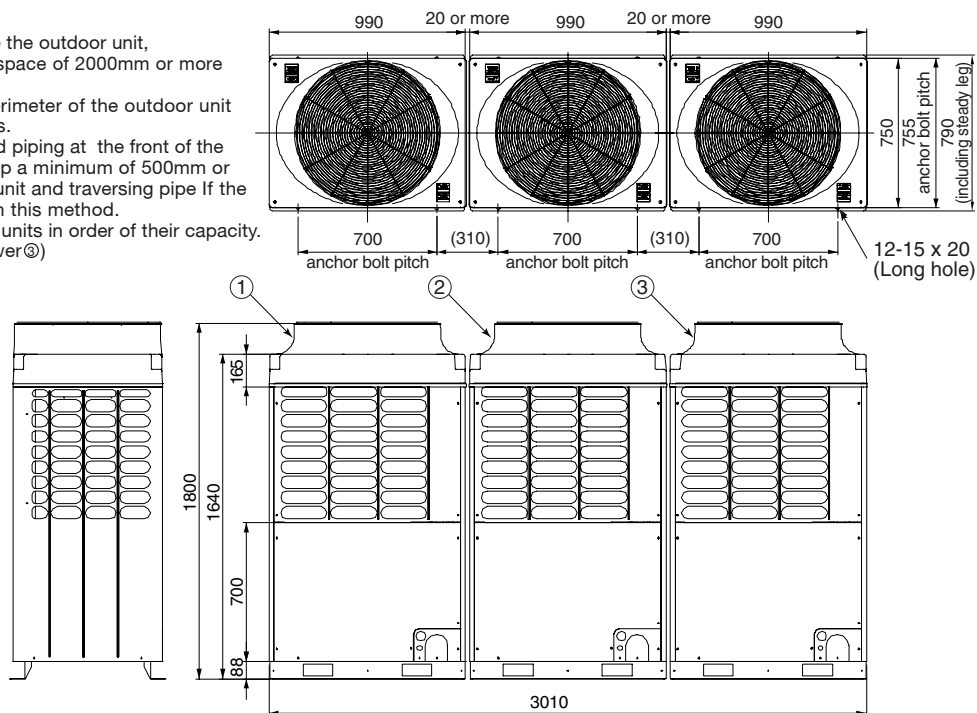

Combination unit	Combination outdoor unit		
	Header	Follower	Follower
MMY-AP2201T8, HT8, HT7	MMY-MAP0801T8, HT8, HT7	MMY-MAP0801T8, HT8, HT7	MMY-MAP0601T8, HT8, HT7
MMY-AP2401T8, HT8, HT7	MMY-MAP0801T8, HT8, HT7	MMY-MAP0801T8, HT8, HT7	MMY-MAP0801T8, HT8, HT7
MMY-AP2601T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7	MMY-MAP0801T8, HT8, HT7	MMY-MAP0801T8, HT8, HT7
MMY-AP2801T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7	MMY-MAP0801T8, HT8, HT7
MMY-AP3001T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7
MMY-AP3221T8, HT8, HT7	MMY-MAP1201T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7
MMY-AP3411T8, HT8, HT7	MMY-MAP1201T8, HT8, HT7	MMY-MAP1201T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7
MMY-AP3611T8, HT8, HT7	MMY-MAP1201T8, HT8, HT7	MMY-MAP1201T8, HT8, HT7	MMY-MAP1201T8, HT8, HT7

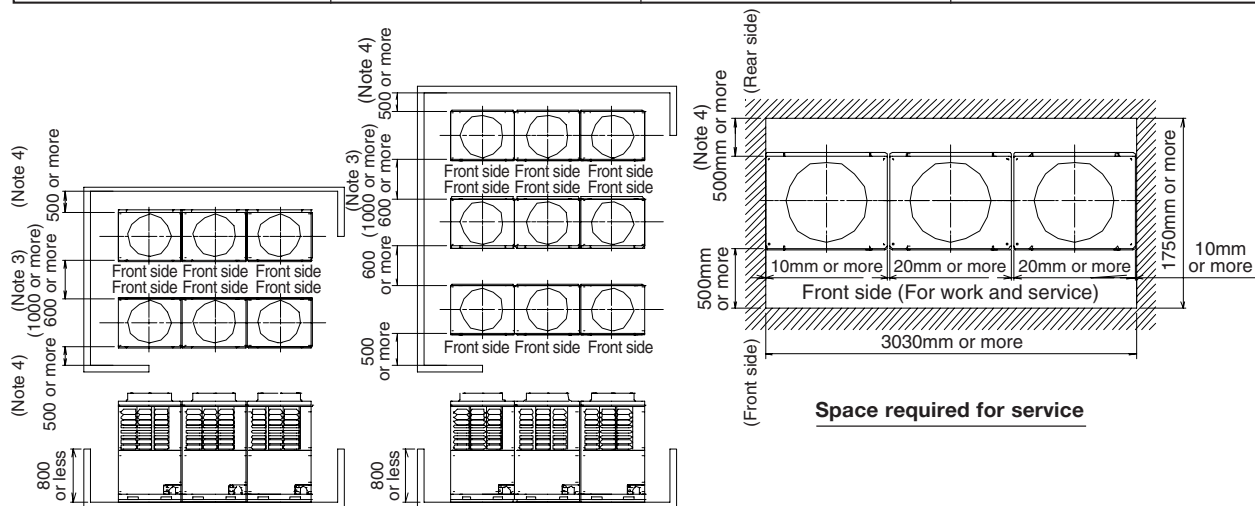


Four units connected

MMY-AP3201T8, AP3401T8, AP3601T8, AP3801T8, AP4001T8, AP4201T8, AP4401T8, AP4601T8, AP4801T8

MMY-AP3201HT8, AP3401HT8, AP3601HT8, AP3801HT8, AP4001HT8, AP4201HT8, AP4401HT8, AP4601HT8, AP4801HT8


MMY-AP3201HT7, AP3401HT7, AP3601HT7, AP3801HT7, AP4001HT7, AP4201HT7, AP4401HT7, AP4601HT7, AP4801HT7

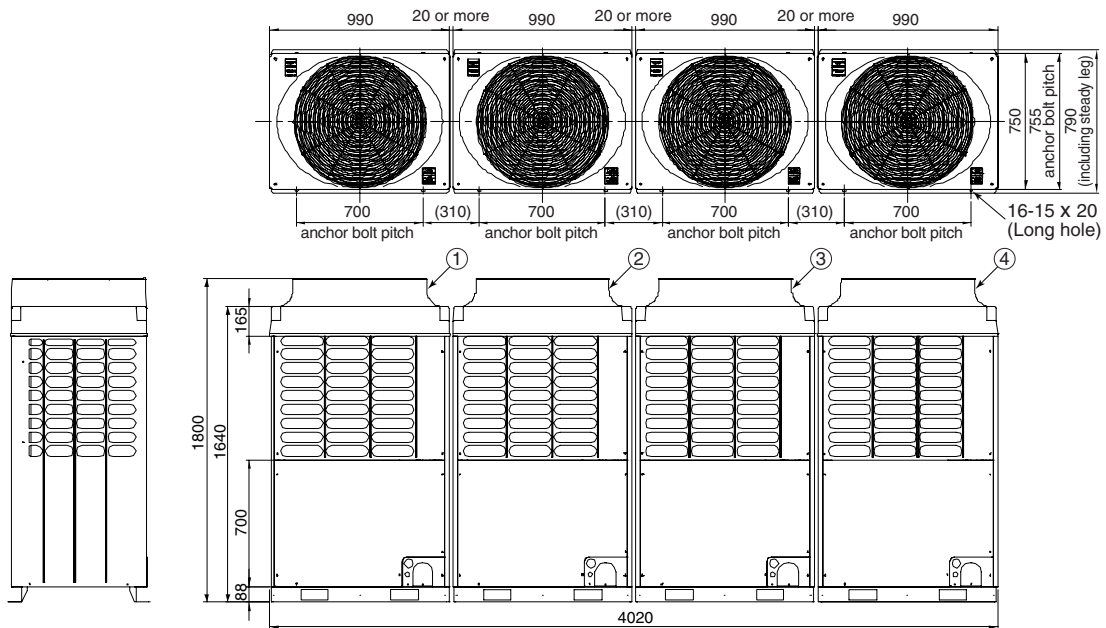

Combination unit	Combination outdoor unit			
	Header	Follower	Follower	Follower
MMY-AP3201T8, HT8, HT7	MMY-MAP0801T8, HT8, HT7	MMY-MAP0801T8, HT8, HT7	MMY-MAP0801T8, HT8, HT7	MMY-MAP0801T8, HT8, HT7
MMY-AP3401T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7	MMY-MAP0801T8, HT8, HT7	MMY-MAP0801T8, HT8, HT7	MMY-MAP0801T8, HT8, HT7
MMY-AP3601T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7	MMY-MAP0801T8, HT8, HT7	MMY-MAP0801T8, HT8, HT7
MMY-AP3801T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7	MMY-MAP0801T8, HT8, HT7
MMY-AP4001T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7
MMY-AP4201T8, HT8, HT7	MMY-MAP1201T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7
MMY-AP4401T8, HT8, HT7	MMY-MAP1201T8, HT8, HT7	MMY-MAP1201T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7
MMY-AP4601T8, HT8, HT7	MMY-MAP1201T8, HT8, HT7	MMY-MAP1201T8, HT8, HT7	MMY-MAP1201T8, HT8, HT7	MMY-MAP1001T8, HT8, HT7
MMY-AP4801T8, HT8, HT7	MMY-MAP1201T8, HT8, HT7	MMY-MAP1201T8, HT8, HT7	MMY-MAP1201T8, HT8, HT7	MMY-MAP1201T8, HT8, HT7

(NOTES)

1. If there is an obstacle above the outdoor unit, ensure there is a minimum space of 2000mm or more above the unit.
2. Any obstacle around the perimeter of the outdoor unit must be kept 800mm or less.
3. Draw out the locally supplied piping at the front of the outdoor unit horizontally, keep a minimum of 500mm or more, between the outdoor unit and traversing pipe. If the pipework is to be installed in this method.
4. Arrange each outdoor unit in order of its capacity.
(Header ≥ Follower② ≥ Follower③ ≥ Follower④)

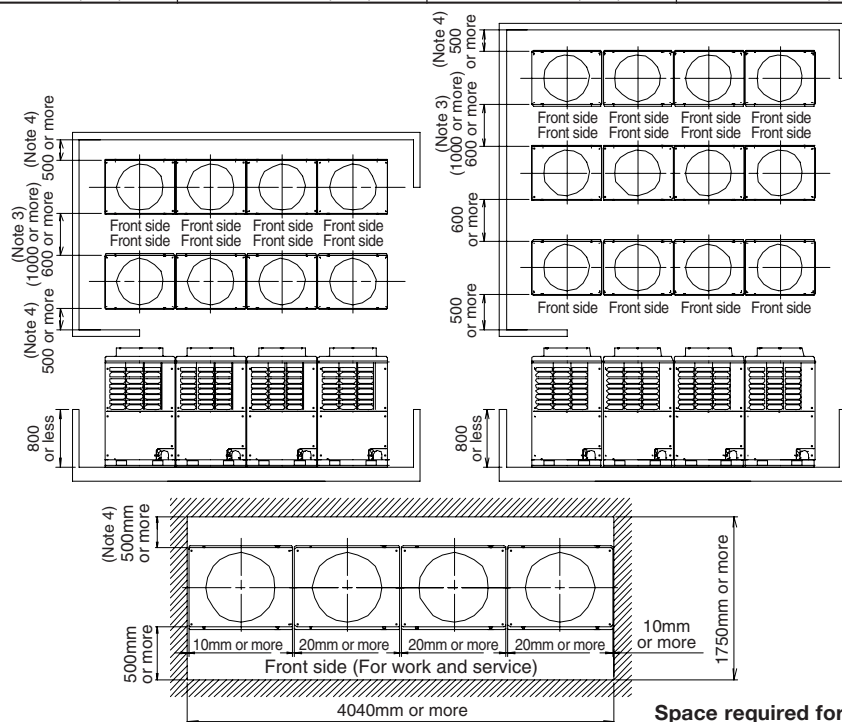


Space required for service

Branch header/Branch joint


Branch header

RBM-HY1043E, HY1083E, HY2043E, HY2083E

Gas side

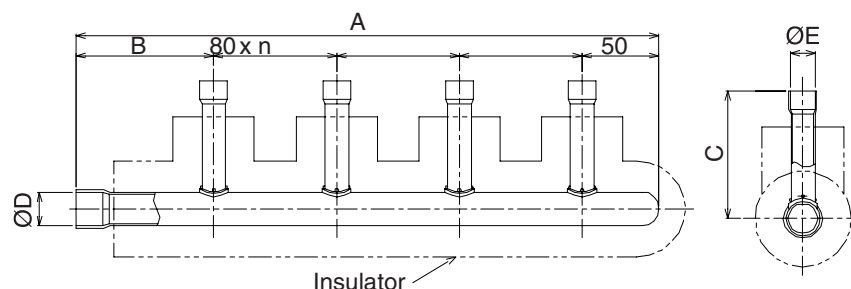

Liquid side

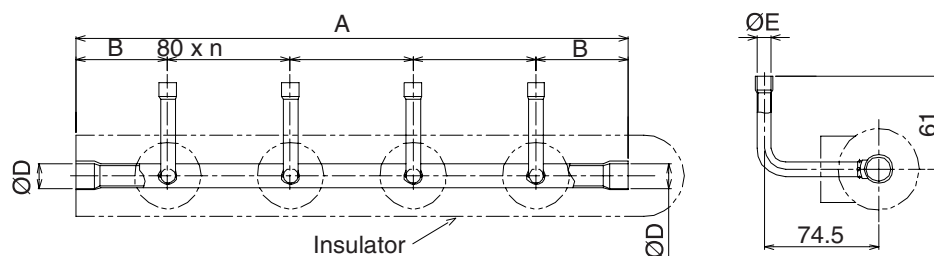


Model		A	B	C	ØD	ØE	n	Accessory socket Q'ty
RBM-HY1043E	Gas side	380	90	83.6	22.2	15.9	3	(6) x 4, (9) x 4, (14) x 1, (18) x 1, (70) x 1
	Liquid side	360	60	—	15.9	9.5	3	(1) x 4, (6) x 1, (9) x 1
RBM-HY1083E	Gas side	700	90	83.6	22.2	15.9	7	(6) x 8, (9) x 8, (14) x 1, (18) x 1, (70) x 1
	Liquid side	680	60	—	15.9	9.5	7	(1) x 8, (6) x 1, (9) x 1
RBM-HY2043E	Gas side	385.5	95.5	89.3	31.8	15.9	3	(6) x 2, (9) x 2, (27) x 1, (59) x 1
	Liquid side	360	60	—	15.9	9.5	3	(1) x 2
RBM-HY2083E	Gas side	705.5	95.5	89.3	31.8	15.9	7	(6) x 7, (9) x 7, (27) x 1, (59) x 1
	Liquid side	680	60	—	15.9	9.5	7	(1) x 7


T-shape branch joint

RBM-BT13E


Gas side

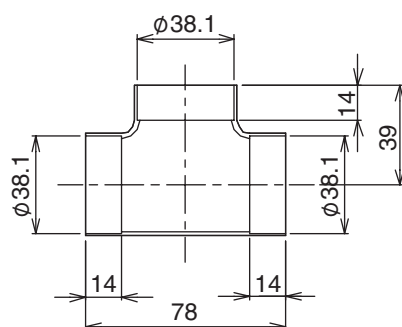

Liquid side



Balance pipe




	Accessory socket Q'ty
Gas side	(61) x 1, (62) x 1, (71) x 2, (73) x 2, (74) x 1,
Liquid side	(14) x 2, (18) x 1, (85) x 2, (86) x 1


Y-shape branch joint

RBM-BY53E, BY103E

Gas side

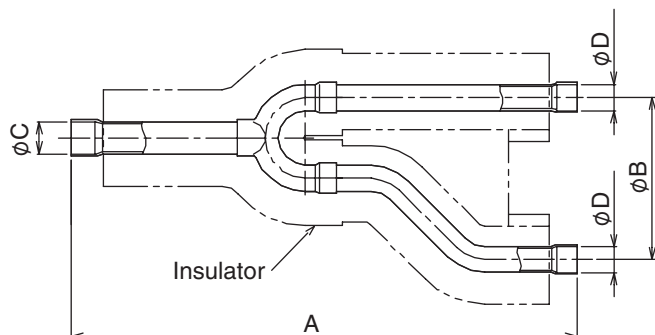


Liquid side

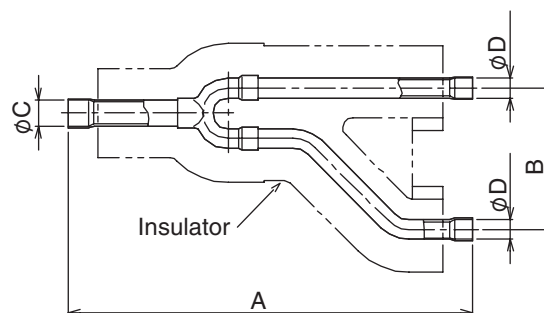


RBM-BY203E, BY303E

Gas side


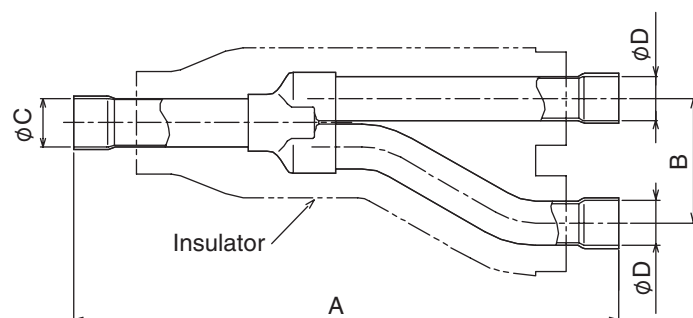


Liquid side

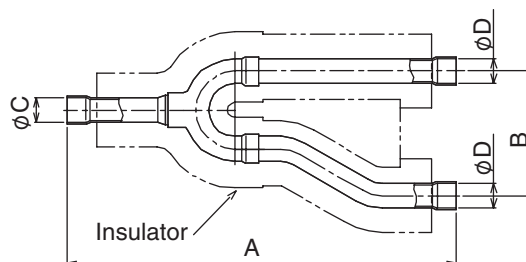


Model		A	B	ØC	ØD	Accessory socket Q'ty
RBM-BY53E	Gas side	250	80	15.9	12.7	(5) x 2, (54) x 2, (9) x 1, (51) x 1
	Liquid side	200	70	12.7	9.5	(1) x 2, (5) x 1
RBM-BY103E	Gas side	350	80	22.2	19.1	(7) x 1, (10) x 1, (13) x 2, (18) x 1, (52) x 2, (70) x 1, (89) x 1
	Liquid side	250	80	15.9	12.7	(2) x 1, (5) x 2, (6) x 1, (9) x 1, (54) x 1
RBM-BY203E	Gas side	350	80	31.8	28.6	(16) x 1, (20) x 1, (27) x 1, (43) x 2, (48) x 1, (49) x 1, (58) x 1, (59) x 1
	Liquid side	250	80	15.9	15.9	(3) x 1, (6) x 1, (9) x 2
RBM-BY303E	Gas side	400	110	38.1	38.1	(61) x 3, (62) x 2, (71) x 2, (73) x 1, (74) x 1, (75) x 1, (76) x 1, (77) x 1
	Liquid side	350	80	22.2	19.1	(4) x 1, (7) x 1, (10) x 1, (13) x 2, (14) x 1, (18) x 1, (52) x 1


Accessory socket

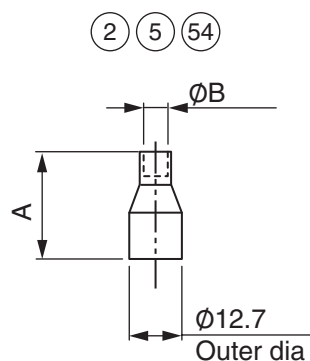


	A	ØB
②	29	6.4
⑤	26	9.5
⑤4	31	15.9

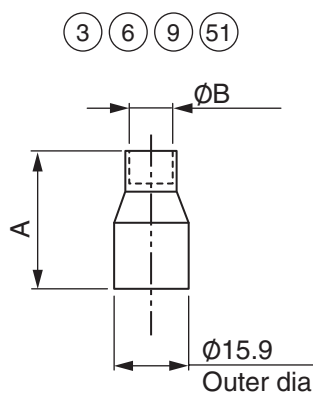


	A	ØB
③	35	6.4
⑥	32	9.5
⑨	28	12.7
⑤1	38	19.1

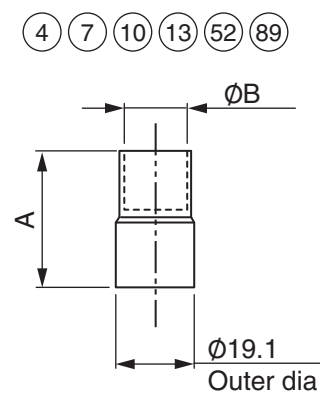


	A	ØB
④	39	6.4
⑦	39	9.5
⑩	36	12.7
⑬	33	15.9
⑤2	43	22.2
⑧9	53	28.6

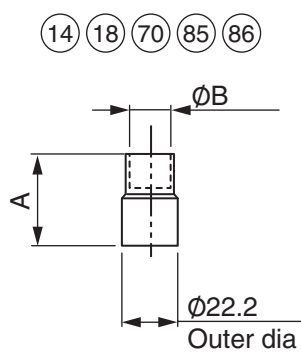


	A	ØB
⑭	40	15.9
⑱	40	19.1
⑦0	54	28.6
⑧5	41	12.7
⑧6	44	9.5

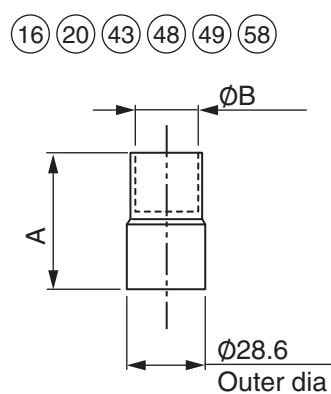

	A	ØB
⑰	50	15.9
⑳	52	19.1
㉔	50	22.2
㉔8	54	9.5
㉔9	52	12.7
㉔8	62	34.9

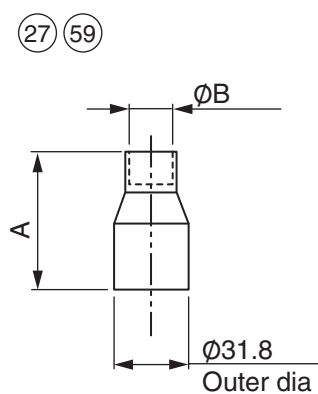

	A	ØB
⑳7	49	28.6
㉔9	59	34.9

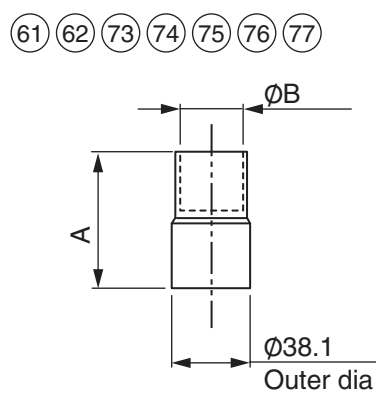

	A	ØB
⑶1	55	34.9
⑶2	66	41.3
⑶1	66	28.6
⑶3	66	22.2
⑶4	66	19.1
⑶5	64	15.9
⑶6	62	12.7
⑶7	62	9.5



Specifications

16 Specifications

TECHNICAL SPECIFICATIONS

Indoor unit (50Hz specification)



50Hz

• 4-way Air Discharge Cassette Type


Model name			MMU-	AP0091H	AP0121H	AP0151H	AP0181H	AP0241H	AP0271H	AP0301H	AP0361H	AP0481H	AP0561H
Cooling/Heating capacity (Note 1)			(kW)	2.8/3.2	3.6/4.0	4.5/5.0	5.6/6.3	7.1/8.0	8.0/9.0	9.0/10.0	11.2/12.5	14.0/16.0	16.0/18.0
Electrical characteristics	Power supply			1 phase 50Hz 230V (220 — 240V) (Separate power supply for indoor units is required.)									
	Running current (A)			0.17		0.19	0.21	0.24		0.35	0.59	0.81	0.83
	Power consumption (kW)			0.020		0.022	0.026	0.032		0.048	0.070	0.110	0.112
	Starting current (A)			0.30		0.33	0.36	0.42		0.59	0.87	1.23	1.26
Appearance	Main unit			Heat-insulating material attached Zinc hot dipping steel plate									
	Ceiling Panel	Model		RBC-U21PG (W) -E									
		Panel colour		Moon white (Munsell/2.5GY 9.0/0.5)									
Outer dimension	Main unit	Height (mm)	256								319		
		Width (mm)	840										
		Depth (mm)	840										
	Ceiling panel	Height (mm)	35										
		Width (mm)	950										
		Depth (mm)	950										
Total weight	Main unit (kg)		20		22		23			28			
	Ceiling panel (kg)		4.5										
Heat exchanger				Finned tube									
Soundproof/Heat-insulating material				Non-flammable insulation									
Fan unit	Fan			Turbo fan									
	Standard air flow High (Mid./Low) (m³/h)		800 (730/680)		930 (830/790)	1,050 (920/800)	1,200 (920/820)		1,320 (1,110/850)	1,680 (1,300/1,070)	2,040 (1,430/1,130)	2,090 (1,520/1,230)	
	Motor (W)		60								90		
Air filter				Standard filter (Long life filter)									
Controller				Remote controller									
Connecting pipe	Gas side (mm)		ø 9.5		ø 12.7		ø 15.9						
	Liquid side (mm)		ø 6.4				ø 9.5						
	Drain port (Nominal dia. mm)		25 (Polyvinyl chloride tube)										
Sound pressure level(Note 2) (High/Mid./Low) (dB(A))				30/29/27		31/29/27	32/29/28	34/31/28		37/33/30	40/36/33	44/38/34	45/40/34

Note 1 : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.

Note 2 : The sound levels are measured in an anechoic chamber in accordance with JIS B8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB
Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

50Hz



• 2-way Air Discharge Cassette Type


Model name			MMU-	AP0071WH	AP0091WH	AP0121WH	AP0151WH	AP0181WH	AP0241WH	AP0271WH	AP0301WH	AP0481WH China only	
Cooling/Heating capacity			(kW)	2.2/2.5	2.8/3.2	3.6/4.0	4.5/5.0	5.6/6.3	7.1/8.0	8.0/9.0	9.0/10.0	14.0/16.0	
Electrical characteristics	Power supply		1 phase 50Hz 230V (220 — 240V) (Separate power supply for indoor units is required.)									1 phase 50Hz 220V	
	Running current (A)		0.31			0.32		0.46		0.47		1.16	
	Power consumption (kW)		0.070			0.072		0.105		0.106		0.250	
	Power factor (%)		97						99		98		98
	Starting current (A)		0.47			0.60		0.89		0.98		1.33	
Appearance	Main unit		Heat-insulating material attached Zinc hot dipping steel plate										
	Ceiling panel	Model	RBC-UW136PG			RBC-UW266PG					RBC- UW466PG		
		Panel colour	Light ivory (Munsell 10Y 9/0.5)										
Outer dimension	Main unit	Height (mm)	398									406	
		Width (mm)	830			1,350					1,650		
		Depth (mm)	550									620	
	Ceiling panel	Height (mm)	8										
		Width (mm)	1,000			1,520					1,898		
		Depth (mm)	650									680	
Total weight	Main unit (kg)		33			44		48			52		
	Ceiling panel (kg)		8			11					18		
Heat exchanger			Finned tube										
Soundproof/Heat-insulating material			Non-flammable insulation										
Fan unit	Fan		Centrifugal fan										
	Standard air flow (High/Mid./Low) (m³/h)		570/510/450			780/700/600		1140/960/720		1260/1140/960	1920/1500/1050		
	Motor (W)		53			39		53			92		
Air filter			Standard filter (Long life filter)										
Controller			Remote controller										
Connecting pipe	Gas side (mm)		ø 9.5			ø 12.7		ø 15.9					
	Liquid side (mm)		ø 6.4					ø 9.5					
	Drain port (Nominal dia. mm)		25 (Polyvinyl chloride tube)										
Sound pressure level(Note 2) (High/Mid./Low) (dB(A))			34/32/30			35/33/30		38/35/33		40/37/34	45/42/39		

Note 1 : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.

Note 2 : The sound levels are measured in an anechoic chamber in accordance with JIS B8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

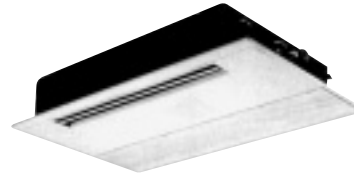

50Hz


• 1-way Air Discharge Cassette Type

Model name			MMU-	AP0071YH	AP0091YH	AP0121YH	AP0151SH	AP0181SH	AP0241SH
Cooling/Heating capacity (Note 1)			(kW)	2.2/2.5	2.8/3.2	3.6/4.0	4.5/5.0	5.6/6.3	7.1/8.0
Electrical characteristics (Note 2)	Power supply			1 phase 50Hz 230V (220 — 240V) (Separate power supply for indoor units is required.)					
	Running current (A)			0.24			0.48		0.55
	Power consumption (kW)			0.053			0.103		0.115
	Power factor (%)			95			93		91
	Starting current (A)			0.6			0.8		1.1
Appearance	Main unit			Heat-insulating material attached Zinc hot dipping steel plate					
	Ceiling panel	Model			RBC-UY135PG		RBC-US165PG		RBC-US265PG
		Panel colour			W : Silky shade (1Y8.5/0.5)				
Outer dimension	Main unit	Height (mm)	235			198			
		Width (mm)	850			1,000		1,200	
		Depth (mm)	400			655			
	Ceiling panel	Height (mm)	18			10			
		Width (mm)	1,050			1,220		1,420	
		Depth (mm)	470			755			
Total weight	Main unit (kg)			22		27		31	
	Ceiling panel (kg)			3.5		8		9	
Heat exchanger				Finned tube					
Soundproof/Heat-insulating material				Non-flammable insulation					
Fan unit	Fan			Centrifugal fan					
	Standard air flow (High/Mid./Low) (m³h)			540/480/420			780/720/660		1,200/1,140/1,020
	Motor (W)			22			34		
Controller				Remote controller					
Room thermostat				Attached					
Air filter				Standard filter (Long life filter)					
Connecting pipe	Gas side (mm)			ø 9.5			ø 12.7		ø 15.9
	Liquid side (mm)			ø 6.4					ø 9.5
	Drain port (Nominal dia. mm)			25 (Polyvinyl chloride tube)					
Sound pressure level(Note 2)(High/Mid./Low) (dB(A))				42/39/34			42/39/35		43/41/37

Note 1 : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.

Note 2 : The sound levels are measured in an anechoic chamber in accordance with JIS B8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB
Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB


50Hz

• Concealed Duct Type

Model name		MMD-	AP0071BH	AP0091BH	AP0121BH	AP0151BH	AP0181BH	AP0241BH	AP0271BH	AP0301BH	AP0361BH	AP0481BH	AP0561BH
Cooling/Heating capacity (Note 1) (kW)			2.2/2.5	2.8/3.2	3.6/4.0	4.5/5.0	5.6/6.3	7.1/8.0	8.0/9.0	9.0/10.0	11.2/12.5	14.0/16.0	16.0/18.0
Electrical characteristics	Power supply		1 phase 50Hz 230V (220 — 240V) (Separate power supply for indoor units is required.)										
	Running current (A)		0.29		0.34		0.43	0.52		0.61	0.83	0.98	
	Power consumption(kW)		0.033		0.039		0.050	0.060		0.071	0.107	0.128	
	Starting current (A)		0.5		0.59		0.75	0.90		1.05	1.44	1.70	
Appearance	Main unit		Zinc hot dipping steel plate										
Outer dimension	Main unit	Height (mm)	320										
		Width (mm)	550			700		1,000			1,350		
		Depth (mm)	800										
	Suction ceiling panel	Height (mm)	9										
		Width (mm)	630			780		1,080			1,430		
		Depth (mm)	500										
Total weight	Main unit (kg)		28			32		43			55		
	Ceiling panel (kg)		3.5			4		6			7		
Heat exchanger			Finned tube										
Soundproof/Heat-insulating material			Non-flammable insulation										
Fan unit	Fan		Centrifugal fan										
	Standard air flow High (Mid./Low) (m³/h)		480 (420/340)		570 (490/400)	650 (540/480)	780 (660/540)	1,140 (990/870)		1,260 (1080/870)	1,620 (1410/1200)	1,980 (1710/1490)	
	Motor (W)		120										
	External static pressure (factory setting) (Pa)		50 (4 mmAq)										
	External static pressure (Pa)		110 (10 mmAq)										
Air filter			Standard filter (Long life filter)										
Controller			Remote controller										
Connecting pipe	Gas side (mm)		ø 9.5			ø 12.7		ø 15.9					
	Liquid side (mm)		ø 6.4						ø 9.5				
	Drain port (Nominal dia. mm)		25 (Polyvinyl chloride tube)										
Sound pressure level(Note 2) (High/Mid./Low) (dB(A))			30/28/26		31/29/27		32/30/28	33/31/29		34/32/29	36/34/32	36/34/32	

Note 1 : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.

Note 2 : The sound levels are measured in an anechoic chamber in accordance with JIS B8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB
Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB



50Hz

• Concealed Duct High Static Pressure Type

Model name		MMD-	AP0181H	AP0241H	AP0271H	AP0361H	AP0481H	AP0721H	AP0961H
Cooling/Heating capacity (Note 1)		(kW)	5.6/6.3	7.1/8.0	8.0/9.0	11.2/12.5	14.0/16.0	22.4/25.0	28.0/31.5
Electrical characteristics	Power supply		1 phase 50Hz 230V (220 — 240V) (Separate power supply for indoor units is required.)						
	Running current (A)		0.81	1.35		1.63	1.84	5.25	5.52
	Power consumption (kW)		0.184	0.299		0.368	0.414	1.200	1.260
	Power factor (%)		99	96		98	98	99	99
	Starting current (A)		1.3	3.5		4.1	4.8	13.6	14.8
Appearance			Zinc hot dipping steel plate						
Outer dimension	Height x Width x Depth (mm)		380 x 850 x 660				380 x 1,200 x 660	470 x 1,380 x 1,250	
Total weight (kg)			50	52		56	67	150	
Heat exchanger			Finned tube						
Soundproof/Heat-insulating material			Non-flammable insulation						
Fan unit	Fan		Centrifugal fan						
	Standard air flow (m³/h)		900	1,320		1,600	2,100	3,600	4,200
	Motor (W)		160			260		370 x 3	
	External static pressure (Factory setting) (Pa)		137						
	External static pressure (Pa)		68.6-137-196						
	Air flow limit Lower limit/Upper limit (m³/h)		720/1,080	1,060/1,580		1,280/1,920	1,680/2,520	2,880/4,320	3,360/5,040
Air filter			Option or field supply						
Controller			Remote controller						
Connecting pipe	Gas side (mm)		ø 12.7	ø 15.9				ø 22.2	
	Liquid side (mm)		ø 6.4	ø 9.5				ø 12.7	
	Drain port (Nominal dia. mm)		25 (One side of male screw)						
Sound pressure level(Note 2) (High/Mid./Low) (dB(A))			37	40				49	50

Note 1 : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.

Note 2 : The sound levels are measured in an anechoic chamber in accordance with JIS B8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB
Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

50Hz



• Under Ceiling Type

Model name		MMC-	AP0151H	AP0181H	AP0241H	AP0271H	AP0361H	AP0481H
Cooling/Heating capacity (Note 1)		(kW)	4.5/5.0	5.6/6.3	7.1/8.0	8.0/9.0	11.2/12.5	14.0/16.0
Electrical characteristics	Power supply		1 phase 50Hz 230V (220 — 240V) (Separate power supply for indoor units is required.)					
	Running current (A)		0.29	0.32	0.42		0.78	0.84
	Power consumption (kW)		0.033	0.038	0.050		0.091	0.110
	Starting current (A)		0.43	0.48	0.62		1.17	1.25
Appearance			White (Munsell 10Y 9.3/0.4)					
Outer dimension	Height x Width x Depth (mm)		210 x 910 x 680		210 x 1,180 x 680		210 x 1,595 x 680	
Total weight (kg)			22		26		34	
Heat exchanger			Finned tube					
Soundproof/Heat-insulating			Non-flammable insulation					
material	Fan		Centrifugal fan					
Fan unit	Standard air flow (High/Mid./Low) (m³/h)		720/600/540	780/660/540	1,110/900/840		1,650/1,380/1,200	1,800/1,560/1,320
	Motor (W)		30		40		80	
Controller			Remote controller					
Room thermostat			Attached					
Air filter			Standard filter (Long life filter)					
Connecting pipe	Gas side (mm)		ø 12.7		ø 15.9			
	Liquid side (mm)		ø 6.4		ø 9.5			
	Drain port (Nominal dia. mm)		20 (Polyvinyl chloride tube)					
Sound pressure level(Note 2) (High/Mid./Low) (dB(A))			35/32/30	36/33/30	38/36/33		41/38/35	43/40/37

Note 1 : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.

Note 2 : The sound levels are measured in an anechoic chamber in accordance with JIS B8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB
Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB



50Hz


• High Wall Type

Model name		MMK-	AP0071H	AP0091H	AP0121H	AP0151H	AP0181H	AP0241H
Cooling/Heating capacity (Note 1)		(kW)	2.2/2.5	2.8/3.2	3.6/4.0	4.5/5.0	5.6/6.3	7.1/8.0
Electrical characteristics	Power supply		1 phase 50Hz 230V (220 — 240V) (Separate power supply for indoor units is required.)					
	Running current (A)		0.30			0.32		0.35
	Power consumption (kW)		0.035			0.037		0.040
	Starting current (A)		0.36			0.42		0.47
Appearance	Suction grille and side panel		Silky mist (Munsell 1Y 8.9/0.5)					
	Discharge grille		City gray (Munsell N6.5)					
	Bottom surface		Silky mist (Munsell 1Y 8.9/0.5)					
Outer dimension	Height x Width x Depth (mm)		368 x 895 x 210			368 x 1,055 x 210		368 x 1,430 x 210
Total weight		(kg)	18			19		25
Heat exchanger			Finned tube					
Soundproof/Heat-insulating material			Non-flammable insulation					
Fan unit	Fan		Cross-flow fan					
	Standard air flow (High/Mid./Low) (m³/h)		600/540/480			780/660/600		1,200/1,020/900
	Motor outlet (W)		30					
Air filter			Standard filter (Simple filter)					
Controller			Remote controller					
Connecting pipe	Gas side (mm)		ø 9.5			ø 12.7		ø 15.9
	Liquid side (mm)		ø 6.4					ø 9.5
	Drain port (Nominal dia. mm)		20 (Polyvinyl chloride tube)					
Sound pressure level(Note 2) (High/Mid./Low) (dB(A))			39/34/31			42/38/35		42/38/35

Note 1 : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.

Note 2 : The sound levels are measured in an anechoic chamber in accordance with JIS B8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB
Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB



50Hz


• Floor Standing Cabinet Type

Model name		MML-	AP0071H	AP0091H	AP0121H	AP0151H	AP0181H	AP0241H
Cooling/Heating capacity (Note 1)		(kW)	2.2/2.5	2.8/3.2	3.6/4.0	4.5/5.0	5.6/6.3	7.1/8.0
Electrical characteristics	Power supply		1 phase 50Hz 230V (220 — 240V) (Separate power supply for indoor units is required.)					
	Running current (A)		0.26		0.43		0.47	
	Power consumption (kW)		0.056		0.092		0.102	
	Power factor (%)		94		93		94	
	Starting current (A)		0.60		0.80		1.10	
Appearance			Silky shade (1Y8.5/0.5)					
Outer dimension	Height x Width x Depth (mm)		630 x 950 x 230					
Total weight (kg)			37				40	40
Heat exchanger			Finned tube					
Soundproof/Heat-insulating material			Non-flammable insulation					
Fan unit	Fan		Centrifugal fan					
	Standard air flow (High/Mid./Low) (m³/h)		480/420/360		900/780/650		1,080/930/780	
	Motor outlet (W)		45				70	
Air filter			Standard filter (Simple filter)					
Controller			Remote controller					
Connecting pipe	Gas side (mm)		ø 9.5			ø 12.7		ø 15.9
	Liquid side (mm)		ø 6.4					ø 9.5
	Drain port (Nominal dia. mm)		20 (Polyvinyl chloride tube)					
Sound pressure level(Note 2) (High/Mid./Low) (dB(A))			39/37/35		45/41/38		49/44/39	

Note 1 : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.

Note 2 : The sound levels are measured in an anechoic chamber in accordance with JIS B8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB
Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB



50Hz

• Floor Standing Concealed Type

Model name		MML-	AP0071BH	AP0091BH	AP0121BH	AP0151BH	AP0181BH	AP0241BH
Cooling/Heating capacity (Note 1)		(kW)	2.2/2.5	2.8/3.2	3.6/4.0	4.5/5.0	5.6/6.3	7.1/8.0
Electrical characteristics	Power supply		1 phase 50Hz 230V (220 — 240V) (Separate power supply for indoor units is required.)					
	Running current (A)		0.25			0.45		0.46
	Power consumption (kW)		0.056			0.090		0.095
	Power factor (%)		97			87		90
	Starting current (A)		0.60			0.80		1.00
Appearance			Zinc hot dipping steel plate					
Outer dimension	Height x Width x Depth (mm)		600 x 745 x 220			600 x 1,045 x 220		
Total weight (kg)			21			29		
Heat exchanger			Finned tube					
Soundproof/Heat-insulating material			Non-flammable insulation					
Fan unit	Fan		Centrifugal fan					
	Standard air flow (High/Mid./Low) (m³/h)		460/400/300			740/600/490		950/790/640
	Motor (W)		19			70		
	Static pressure range (kPa)		0					
Air filter			Standard filter (Simple filter)					
Controller			Remote controller					
Connecting pipe	Gas side (mm)		ø 9.5			ø 12.7		ø 15.9
	Liquid side (mm)		ø 6.4					ø 9.5
	Drain port (Nominal dia. mm)		20 (One side of male screw)					
Sound pressure level(Note 2)(High/Mid./Low)(dB(A))			36 (34/32)					42 (37/33)

Note 1 : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.

Note 2 : The sound levels are measured in an anechoic chamber in accordance with JIS B8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB



50Hz

• Floor Standing Type

Model name		MMF-	AP0151H	AP0181H	AP0241H	AP0271H	AP0361H	AP0481H	AP0561H
Cooling/Heating capacity (Note 1)		(kW)	4.5/5.0	5.6/6.3	7.1/8.0	8.0/9.0	11.2/12.5	14.0/16.0	16.0/18.0
Electrical characteristics	Power supply		1 phase 50Hz 230V (220 — 240V) (Separate power supply for indoor units is required.)						
	Running current (A)		0.67		0.88		1.29	1.60	
	Power consumption (kW)		0.150		0.190		0.280	0.350	
	Power factor (%)		97		94			95	
	Starting current (A)		0.90		1.10		1.70	2.10	
Appearance			W : Silky shade (1Y 8.5/0.5)						
Outer dimension	Height x Width x Depth (mm)		1750 x 600 x 210				1750 x 600 x 390		
Total weight (kg)			48		49		65		
Heat exchanger			Finned tube						
Soundproof/Heat-insulating material			Non-flammable insulation						
Fan unit	Fan		Centrifugal fan						
	Standard air flow (High/Mid./Low) (m³/h)		900/780/660		1,200/1,020/840		1,920/1,680/1,380	2,160/1,860/1,560	
	Motor (W)		37		63		11	16	
Air filter			Standard filter (Simple filter)						
Controller			Remote controller						
Connecting pipe	Gas side (mm)		Ø 12.7		Ø 15.9				
	Liquid side (mm)		Ø 6.4		Ø 9.5				
	Drain port (Nominal dia. mm)		20 (One side of male screw)						
Sound pressure level(Note 2)(High/Mid./Low) (dB(A))			46/43/38		49/45/40		51/48/44	54/50/46	

Note 1 : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.

Note 2 : The sound levels are measured in an anechoic chamber in accordance with JIS B8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

60Hz



Indoor unit (60Hz specifications)

• 4-way Air Discharge Cassette Type

Model name			MMU-	AP0091H	AP0121H	AP0151H	AP0181H	AP0241H	AP0271H	AP0301H	AP0361H	AP0481H	AP0561H
Cooling/Heating capacity (Note 1)			(kW)	2.8/3.2	3.6/4.0	4.5/5.0	5.6/6.3	7.1/8.0	8.0/9.0	9.0/10.0	11.2/12.5	14.0/16.0	16.0/18.0
Electrical characteristics	Power supply		1 phase 60Hz 220V (Separate power supply for indoor units is required.)										
	Running current (A)		0.18		0.20	0.22	0.26		0.37	0.61	0.85	0.87	
	Power consumption (kW)		0.020		0.022	0.026	0.032		0.048	0.070	0.110	0.112	
	Starting current (A)		0.30		0.33	0.36	0.42		0.59	0.87	1.23	1.26	
Appearance	Main unit		Heat-insulating material attached Zinc hot dipping steel plate										
	Ceiling Panel	Model	RBC-U21PG (W) -E										
		Panel colour	Moon white (Munsell/2.5GY 9.0/0.5)										
Outer dimension	Main unit	Height (mm)	256								319		
		Width (mm)	840										
		Depth (mm)	840										
	Ceiling panel	Height (mm)	35										
		Width (mm)	950										
		Depth (mm)	950										
Total weight	Main unit (kg)		20		22		23			28			
	Ceiling panel (kg)		4.5										
Heat exchanger			Finned tube										
Soundproof/Heat-insulating material			Non-flammable insulation										
Fan unit	Fan		Turbo fan										
	Standard air flow High (Mid./Low) (m³/h)		800 (730/680)		930 (830/790)	1,050 (920/800)	1,200 (920/820)		1,320 (1,110/850)	1,680 (1,300/1,070)	2,040 (1,430/1,130)	2,090 (1,520/1,230)	
	Motor (W)		60								90		
Air filter			Standard filter (Long life filter)										
Controller			Remote controller										
Connecting pipe	Gas side (mm)		ø 9.5		ø 12.7		ø 15.9						
	Liquid side (mm)		ø 6.4				ø 9.5						
	Drain port (Nominal dia. mm)		25 (Polyvinyl chloride tube)										
Sound pressure level(Note 2) (High/Mid./Low) (dB(A))			30/29/27		31/29/27	32/29/28	34/31/28		37/33/30	40/36/33	44/38/34	45/40/34	

Note 1 : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.

Note 2 : The sound levels are measured in an anechoic chamber in accordance with JIS B8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB
Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

60Hz



• 2-way Air Discharge Cassette Type


Model name		MMU-	AP0071WH	AP0091WH	AP0121WH	AP0151WH	AP0181WH	AP0241WH	AP0271WH	AP0301WH
Cooling/Heating capacity		(kW)	2.2/2.5	2.8/3.2	3.6/4.0	4.5/5.0	5.6/6.3	7.1/8.0	8.0/9.0	9.0/10.0
Electrical characteristics	Power supply		1 phase 60Hz 220V (Separate power supply for indoor units is required.)							
	Running current (A)		0.33			0.38		0.53		0.58
	Power consumption (kW)		0.070			0.076		0.115		0.123
	Power factor (%)		97			90		99		96
	Starting current (A)		0.46			0.59		0.87		0.96
Appearance	Main unit		Heat-insulating material attached Zinc hot dipping steel plate							
	Ceiling panel	Model	RBC-UW136PG			RBC-UW266PG				
		Panel colour	Light ivory (Munsell 10Y 9/0.5)							
Outer dimension	Main unit	Height (mm)	398							
		Width (mm)	830			1,350				
		Depth (mm)	550							
	Ceiling panel	Height (mm)	8							
		Width (mm)	1,000			1,520				
		Depth (mm)	650							
Total weight	Main unit (kg)		33			44		48		
	Ceiling panel (kg)		8			11				
Heat exchanger			Finned tube							
Soundproof/Heat-insulating material			Non-flammable insulation							
Fan unit	Fan		Centrifugal fan							
	Standard air flow (High/Mid./Low) (m³/h)		570/510/450			780/700/600		1,140/960/720		1,260/1,140/960
	Motor (W)		53			39		53		
Air filter			Standard filter (Long life filter)							
Controller			Remote controller							
Connecting pipe	Gas side (mm)		ø 9.5			ø 12.7		ø 15.9		
	Liquid side (mm)		ø 6.4					ø 9.5		
	Drain port (Nominal dia.mm)		25 (Polyvinyl chloride tube)							
Sound pressure level(Note 2) (High/Mid./Low) (dB(A))			34/32/30			35/33/30		38/35/33		40/37/34

Note 1 : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.

Note 2 : The sound levels are measured in an anechoic chamber in accordance with JIS B8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB
Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

60Hz

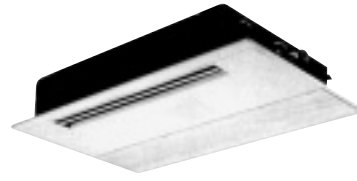

• 1-way Air Discharge Cassette Type

Model name			MMU-	AP0071YH	AP0091YH	AP0121YH	AP0151SH	AP0181SH	AP0241SH
Cooling/Heating capacity (Note 1)			(kW)	2.2/2.5	2.8/3.2	3.6/4.0	4.5/5.0	5.6/6.3	7.1/8.0
Electrical characteristics (Note 2)	Power supply			1 phase 60Hz 220V (Separate power supply for indoor units is required.)					
	Running current (A)			0.26			0.54		0.61
	Power consumption (kW)			0.056			0.115		0.130
	Power factor (%)			98			97		97
	Starting current (A)			0.60			0.80		1.10
Appearance	Main unit			Heat-insulating material attached Zinc hot dipping steel plate					
	Ceiling panel	Model			RBC-UY135PG		RBC-US165PG		RBC-US265PG
		Panel colour			W : Silky shade (1Y8.5/0.5)				
Outer dimension	Main unit	Height (mm)	235			198			
		Width (mm)	850			1,000		1,200	
		Depth (mm)	400			655			
	Ceiling panel	Height (mm)	18			10			
		Width (mm)	1,050			1,220		1,420	
		Depth (mm)	470			755			
Total weight	Main unit (kg)		22			27		31	
	Ceiling panel (kg)		3.5			8		9	
Heat exchanger				Finned tube					
Soundproof/Heat-insulating material				Non-flammable insulation					
Fan unit	Fan			Centrifugal fan					
	Standard air flow (High/Mid./Low) (m³/h)			540/480/420			780/720/660		1,200/1,140/1,020
	Motor (W)			22			34		
Controller				Remote controller					
Room thermostat				Attached					
Air filter				Standard filter (Long life filter)					
Connecting pipe	Gas side (mm)		ø 9.5			ø 12.7		ø 15.9	
	Liquid side (mm)		ø 6.4					ø 9.5	
	Drain port (Nominal dia. mm)		25 (Polyvinyl chloride tube)						
Sound pressure level(Note 2)(High/Mid./Low) (dB(A))				42/39/34			42/39/35		43/41/37

Note 1 : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.

Note 2 : The sound levels are measured in an anechoic chamber in accordance with JIS B8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB
Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB


60Hz

• Concealed Duct Type

Model name			MMD-	AP0071BH	AP0091BH	AP0121BH	AP0151BH	AP0181BH	AP0241BH	AP0271BH	AP0301BH	AP0361BH	AP0481BH	AP0561BH				
Cooling/Heating capacity (Note 1) (kW)			2.2/2.5	2.8/3.2	3.6/4.0	4.5/5.0	5.6/6.3	7.1/8.0	8.0/9.0	9.0/10.0	11.2/12.5	14.0/16.0	16.0/18.0					
Electrical characteristics	Power supply		1 phase 60Hz 220V (Separate power supply for indoor units is required.)															
	Running current (A)		0.30		0.35		0.45		0.55		0.64		0.87		1.03			
	Power consumption (kW)		0.033		0.039		0.050		0.060		0.071		0.107		0.128			
	Starting current (A)		0.5		0.59		0.75		0.90		1.05		1.44		1.70			
Appearance	Main unit		Zinc hot dipping steel plate															
Outer dimension	Main unit	Height (mm)	320															
		Width (mm)	550			700			1,000			1,350						
		Depth (mm)	800															
	Suction ceiling panel	Height (mm)	9															
		Width (mm)	630			780			1,080			1,430						
		Depth (mm)	500															
Total weight	Main unit (kg)		28			32			43			55						
	Ceiling panel (kg)		3.5			4			6			7						
Heat exchanger			Finned tube															
Soundproof/Heat-insulating material			Non-flammable insulation															
Fan unit	Fan		Centrifugal fan															
	Standard air flow High (Mid./Low) (m³/h)		480 (420/340)		570 (490/400)		650 (540/480)		780 (660/540)		1,140 (990/870)		1,260 (1,080/870)		1,620 (1,410/1,200)		1,980 (1,710/1,490)	
	Motor (W)		120															
	External static pressure (factory setting) (Pa)		50 (4 mmAq)															
	External static pressure (pa)		110 (10 mmAq)															
Air filter			Standard filter (Long life filter)															
Controller			Remote controller															
Connecting pipe	Gas side (mm)		ø 9.5			ø 12.7			ø 15.9									
	Liquid side (mm)		ø 6.4						ø 9.5									
	Drain port(Nominal dia. mm)		25 (Polyvinyl chloride tube)															
Sound pressure level(Note 2) (High/Mid./Low) (dB(A))			30/28/26		31/29/27		31/29/27		32/30/28		33/31/29		34/32/29		36/34/32		38/36/32	

Note 1 : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.

Note 2 : The sound levels are measured in an anechoic chamber in accordance with JIS B8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB
Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB



60Hz

• Concealed Duct High Static Pressure Type

Model name		MMD-	AP0181H	AP0241H	AP0271H	AP0361H	AP0481H	AP0721H	AP0961H
Cooling/Heating capacity (Note 1)		(kW)	5.6/6.3	7.1/8.0	8.0/9.0	11.2/12.5	14.0/16.0	22.4/25.0	28.0/31.5
Electrical characteristics	Power supply	1 phase 60Hz 220V (Separate power supply for indoor units is required.)							
	Running current (A)	0.92	1.80	2.07	2.26	7.10	7.42		
	Power consumption (kW)	0.198	0.385	0.450	0.490	1.540	1.610		
	Power factor (%)	98	97	99	99				
	Starting current (A)	1.30	3.40	3.90	4.35	13.00	13.60		
Appearance		Zinc hot dipping steel plate							
Outer dimension	Height x Width x Depth (mm)	380 x 850 x 660				380 x 1,200 x 660	470 x 1,380 x 1,250		
Total weight (kg)		50	52	56	67	150			
Heat exchanger		Finned tube							
Soundproof/Heat-insulating material		Non-flammable insulation							
Fan unit	Fan	Centrifugal fan							
	Standard air flow (m³/h)	900	1,320	1,600	2,100	3,600	4,200		
	Motor (W)	160	260	370 x 3					
	External static pressure (Factory setting) (Pa)	137							
	External static pressure (Pa)	68.6-137-196							
	Air flow limit Lower limit/Upper limit (m³/h)	720/1,080	1,060/1,580	1,280/1,920	1,680/2,520	2,880/4,320	3,360/5,040		
Air filter		Option or field supply							
Controller		Remote controller							
Connecting pipe	Gas side (mm)	Ø 12.7	Ø 15.9	Ø 22.2					
	Liquid side (mm)	Ø 6.4	Ø 9.5	Ø 12.7					
	Drain port (Nominal dia. mm)	25 (One side of male screw)							
Sound pressure level(Note 2) (High/Mid./Low) (dB(A))		37	40	49	50				

Note 1 : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.

Note 2 : The sound levels are measured in an anechoic chamber in accordance with JIS B8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB
Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

60Hz



• Under Ceiling Type

Model name		MMC-	AP0151H	AP0181H	AP0241H	AP0271H	AP0361H	AP0481H	
Cooling/Heating capacity (Note 1)			(kW)	4.5/5.0	5.6/6.3	7.1/8.0	8.0/9.0	11.2/12.5	14.0/16.0
Electrical characteristics	Power supply		1 phase 60Hz 220V (Separate power supply for indoor units is required.)						
	Running current (A)		0.30	0.34	0.44		0.82	0.87	
	Power consumption (kW)		0.033	0.038	0.050		0.091	0.110	
	Starting current (A)		0.43	0.48	0.62		1.17	1.25	
Appearance			White (Munsell 10Y 9.3/0.4)						
Outer dimension	Height x Width x Depth (mm)		210 x 910 x 680		210 x 1,180 x 680		210 x 1,595 x 680		
Total weight (kg)			22		26		34		
Heat exchanger			Finned tube						
Soundproof/Heat-insulating material			Non-flammable insulation						
Fan unit	Fan		Centrifugal fan						
	Standard air flow (High/Mid./Low) (m³/h)		720/600/540	780/660/540	1,110/900/840		1,650/1,380/1,200	1,800/1,560/1,320	
	Motor (W)		30		40		80		
Controller			Remote controller						
Room thermostat			Attached						
Air filter			Standard filter (Long life filter)						
Connecting pipe	Gas side (mm)		Ø 12.7		Ø 15.9				
	Liquid side (mm)		Ø 6.4		Ø 9.5				
	Drain port (Nominal dia. mm)		20 (Polyvinyl chloride tube)						
Sound pressure level (Note 2) (High/Mid./Low) (db(A))			35/32/30	36/33/30	38/36/33		41/38/35	43/40/37	

Note 1 : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.

Note 2 : The sound levels are measured in an anechoic chamber in accordance with JIS B8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB
Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB



60Hz


• High Wall Type

Model name		MMK-	AP0071H	AP0091H	AP0121H	AP0151H	AP0181H	AP0241H
Cooling/Heating capacity (Note 1)		(kW)	2.2/2.5	2.8/3.2	3.6/4.0	4.5/5.0	5.6/6.3	7.1/8.0
Electrical characteristics	Power supply		1 phase 60Hz 220V (Separate power supply for indoor units is required.)					
	Running current (A)		0.32			0.34		0.35
	Power consumption (kW)		0.035			0.037		0.040
	Starting current (A)		0.46			0.48		0.60
Appearance	Suction grille and side panel		Silky mist (Munsell 1Y 8.9/0.5)					
	Discharge grille		City gray (Munsell N6.5)					
	Bottom surface		Silky mist (Munsell 1Y 8.9/0.5)					
Outer dimension	Height x Width x Depth (mm)		368 x 895 x 210			368 x 1,055 x 210		368 x 1,430 x 210
Total weight		(kg)	18			19		25
Heat exchanger			Finned tube					
Soundproof/Heat-insulating material			Non-flammable insulation					
Fan unit	Fan		Cross-flow fan					
	Standard air flow (High/Mid./Low) (m³/h)		600/540/480			780/660/600		1,200/1,020/900
	Motor outlet (W)		30					
Air filter			Standard filter (Simple filter)					
Controller			Remote controller					
Connecting pipe	Gas side (mm)		ø 9.5			ø 12.7		ø 15.9
	Liquid side (mm)		ø 6.4					ø 9.5
	Drain port (Nominal dia. mm)		20 (Polyvinyl chloride tube)					
Sound pressure level(Note 2) (High/Mid./Low) (dB(A))			39/34/31			42/38/35		42/38/35

Note 1 : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.

Note 2 : The sound levels are measured in an anechoic chamber in accordance with JIS B8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB
Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB



60Hz


• Floor Standing Cabinet Type

Model name		MML-	AP0071H	AP0091H	AP0121H	AP0151H	AP0181H	AP0241H
Cooling/Heating capacity (Note 1)		(kW)	2.2/2.5	2.8/3.2	3.6/4.0	4.5/5.0	5.6/6.3	7.1/8.0
Electrical characteristics	Power supply		1 phase 60Hz 220V (Separate power supply for indoor units is required.)					
	Running current (A)		0.25		0.44		0.53	
	Power consumption (kW)		0.053		0.092		0.113	
	Power factor (%)		96		95		97	
	Starting current (A)		0.60		0.80		1.10	
Appearance			Silky shade (1Y8.5/0.5)					
Outer dimension	Height x Width x Depth (mm)		630 x 950 x 230					
Total weight (kg)			37				40	
Heat exchanger			Finned tube					
Soundproof/Heat-insulating material			Non-flammable insulation					
Fan unit	Fan		Centrifugal fan					
	Standard air flow (High/Mid./Low) (m³/h)		480/420/360		900/780/650		1,080/930/780	
	Motor outlet (W)		45				70	
Air filter			Standard filter (Simple filter)					
Controller			Remote controller					
Connecting pipe	Gas side (mm)		ø 9.5			ø 12.7		ø 15.9
	Liquid side (mm)		ø 6.4					ø 9.5
	Drain port (Nominal dia. mm)		20 (Polyvinyl chloride tube)					
Sound pressure level(Note 2) (High/Mid./Low) (dB(A))			39/37/35		45/41/38		49/44/39	

Note 1 : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.

Note 2 : The sound levels are measured in an anechoic chamber in accordance with JIS B8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB
Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB



60Hz

• Floor Standing Concealed Type

Model name		MML-	AP0071BH	AP0091BH	AP0121BH	AP0151BH	AP0181BH	AP0241BH
Cooling/Heating capacity (Note 1)		(kW)	2.2/2.5	2.8/3.2	3.6/4.0	4.5/5.0	5.6/6.3	7.1/8.0
Electrical characteristics	Power supply		1 phase 60Hz 220V (Separate power supply for indoor units is required.)					
	Running current (A)		0.27			0.46		0.51
	Power consumption (kW)		0.058			0.096		0.110
	Power factor (%)		98			95		98
	Starting current (A)		0.60			0.80		1.00
Appearance			Zinc hot dipping steel plate					
Outer dimension	Height x Width x Depth (mm)		600 x 745 x 220			600 x 1,045 x 220		
Total weight (kg)			21			29		
Heat exchanger			Finned tube					
Soundproof/Heat-insulating material			Non-flammable insulation					
Fan unit	Fan		Centrifugal fan					
	Standard air flow (High/Mid./Low) (m³/h)		460/400/300			740/600/490		950/790/640
	Motor (W)		19			70		
	Static pressure range (kPa)		0					
Air filter			Standard filter (Simple filter)					
Controller			Remote controller					
Connecting pipe	Gas side (mm)		ø 9.5			ø 12.7		ø 15.9
	Liquid side (mm)		ø 6.4					ø 9.5
	Drain port (Nominal dia. mm)		20 (One side of male screw)					
Sound pressure level(Note 2)(High/Mid./Low) (dB(A))			36/34/32					42/37/33

Note 1 : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.

Note 2 : The sound levels are measured in an anechoic chamber in accordance with JIS B8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB
Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB



60Hz

• Floor Standing Type

Model name		MMF-	AP0151H	AP0181H	AP0241H	AP0271H	AP0361H	AP0481H	AP0561H
Cooling/Heating capacity (Note 1)		(kW)	4.5/5.0	5.6/6.3	7.1/8.0	8.0/9.0	11.2/12.5	14.0/16.0	16.0/18.0
Electrical characteristics	Power supply		1 phase 60Hz 220V (Separate power supply for indoor units is required.)						
	Running current (A)		0.67		0.90		1.37	1.75	
	Power consumption (kW)		0.146		0.195		0.295	0.380	
	Power factor (%)		99		98			99	
	Starting current (A)		0.90		1.10		1.18	2.30	
Appearance			W : Silky Shade (1Y 8.5/0.5)						
Outer dimension	Height x Width x Depth (mm)		1,750 x 600 x 210				1,750 x 600 x 390		
Total weight (kg)			48		49		65		
Heat exchanger			Finned tube						
Soundproof/Heat-insulating material			Non-flammable insulation						
Fan unit	Fan		Centrifugal fan						
	Standard air flow (High/Mid./Low) (m³/h)		900/780/660		1,200/1,020/840		1,680/1,920/1,380	2,160/1,860/1,560	
	Motor (W)		37		63		110	160	
Air filter			Standard filter (Simple filter)						
Controller			Remote controller						
Connecting pipe	Gas side (mm)		Ø 12.7		Ø 15.9				
	Liquid side (mm)		Ø 6.4		Ø 9.5				
	Drain port (Nominal dia. mm)		20 (One side of male screw)						
Sound pressure level(Note 2) (High/Mid./Low) (dB(A))			46/43/38		49/45/40		51/48/44	54/50/46	

Note 1 : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.

Note 2 : The sound levels are measured in an anechoic chamber in accordance with JIS B8616. Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB
Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB



50Hz

Outdoor unit (50Hz)

Equivalent HP			Equivalent to 5HP	Equivalent to 6HP	Equivalent to 8HP	Equivalent to 10HP	Equivalent to 12HP	
Model name	Cooling Only		MMY-MAP0501T8	MAP0601T8	MAP0801T8	MAP1001T8	MAP1201T8	
	Heat Pump		MMY-MAP0501HT8	MAP0601HT8	MAP0801HT8	MAP1001HT8	MAP1201HT8	
Outdoor unit type			Inverter unit					
Cooling capacity (* 1)			(kW)	14.0	16.0	22.4	28.0	33.5
Standard heating capacity (* 1)			(kW)	16.0	18.0	25.0	31.5	37.5
Power supply (* 2)			3 phase 50Hz 400V (380 — 415V)					
Electrical characteristics (* 1)	Cooling	Running current	(A)	5.85	7.28	8.62	11.55	18.30
		Power consumption	(kW)	3.65	4.64	5.67	7.68	11.92
		Power factor	(%)	90	92	95	96	94
		EER (Energy Efficiency Ratio)	(kW/kW)	3.84	3.45	3.95	3.65	2.81
		Starting current	(A)	1.0	1.0	1.0	1.0	1.0
	Heating	Running current	(A)	6.09	7.08	8.93	11.98	15.65
		Power consumption	(kW)	3.84	4.56	5.88	7.97	10.19
		Power factor	(%)	91	93	95	96	94
		EER (Energy Efficiency Ratio)	(kW/kW)	4.17	3.95	4.25	3.95	3.68
		Starting current	(A)	1.0	1.0	1.0	1.0	1.0
External dimension			(mm)	Height 1,800 x Width 990 x Depth 750				
Total weight		Cooling Only	(kg)	227		256		
		Heat Pump	(kg)	228		258		
Colour			Silky shade (Munsell 1Y8.5/0.5)					
Compressor	Type	Hermetic type						
	Motor output	(kW)	1.1 x 2	1.4 x 2	2.3 x 2	3.1 x 2	4.2 x 2	
Fan unit	Fan	Propeller fan						
	Motor output	(kW)	0.60					
	Air volume	(m³/h)	9,000		9,900	10,500		
Heat exchanger			Finned tube					
Refrigerant R410A (Charged refrigerant amount) (* 3)		Cooling Only	(kg)	8.0		11		
		Heat Pump	(kg)	8.5		12.5		
High-pressure switch			(MPa)	OFF : 2.90 ON : 3.73				
Protective devices			(* 5)					
Refrigerant piping specifications (* 4)	Connecting port dia	Gas side	(mm)	ø 15.9	ø 19.1	ø 22.2		ø 28.6
		Liquid side	(mm)	ø 9.5		ø 12.7		
		Balance pipe	(mm)	ø 9.5				
	Connecting method	Gas side	Flare		Brazing			
		Liquid side	Flare					
		Balance pipe	Flare					
	Max. equivalent length		(m)	175				
	Max. real length		(m)	150 (If the total bend length exceeds 150m, use the max equivalent length as the standard.)				
	Max. total pipe length (Real length)		(m)	300				
	Max. height difference		(m)	Outdoor unit is higher than indoor unit : 50 Outdoor unit is lower than indoor unit : 40 (* 6)				
Control wiring			Shield wire 1.25mm² x 2 cores. up to 2000m					
Central remote controller			When connecting to outdoor unit : (Shield wire) 1.25mm² x 2 cores. up to 1000m (Shield wire) 2.0mm² x 2 cores. up to 2000m					
Max. No. of connected indoor units			8	10	13	16	20	
Sound pressure level			(dB(A))	55	56	57	58	59

* 1 : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

The standard piping means that main pipe length is 5 m, branching pipe length 2.5 m of branch piping connected with a 0 meter height.

* 2 : The source voltage must not fluctuate more than ±10%.


* 3 : The amount does not consider extra piping lengths. Refrigerant must be added on site in accordance with the actual piping length.

* 4 : The maximum total piping length indicates the sum of one-way piping lengths on the liquid side or gas side.

System safety protection

* 5 : Discharge temp. sensor, Suction temp. sensor, Compressor case thermostat, High-pressure Switch, Over-current sensor, High-pressure Sensor, Low pressure sensor, Over-current relay.

* 6 : 30m when the height difference between indoor units exceeds 3m.



50Hz

Outdoor unit (Combination) (50Hz)

Equivalent HP			Equivalent to 14HP		Equivalent to 16HP		Equivalent to 18HP		Equivalent to 20HP	
Set Model name	Cooling Only	MMY-	AP1401T8		AP1601T8		AP1801T8		AP2001T8	
	Heat Pump	MMY-	AP1401HT8		AP1601HT8		AP1801HT8		AP2001HT8	
Outdoor unit type			Inverter							
Outdoor unit model	Cooling Only	MMY-	MAP0801T8	MAP0601T8	MAP0801T8	MAP0801T8	MAP1001T8	MAP0801T8	MAP1001T8	MAP1001T8
	Heat Pump	MMY-	MAP0801HT8	MAP0601HT8	MAP0801HT8	MAP0801HT8	MAP1001HT8	MAP0801HT8	MAP1001HT8	MAP1001HT8
Rated cooling capacity (* 1)		(kW)	38.4		45		50.4		56.0	
Standard heating capacity (* 1)		(kW)	43.0		50.0		56.5		63.0	
Power supply (* 2)			3 phase 50Hz 400V (380 — 415V)							
Electrical characteristics (* 1)	Cooling	Running current (A)	17.08		18.54		21.29		24.31	
		Power consumption (kW)	11.12		12.20		14.16		16.17	
		Power factor (%)	94		95		96		96	
		EER (kW/kW) (Energy Efficiency Ratio)	3.45		3.69		3.56		3.46	
		Starting current (A)	1.0		1.0		1.0		1.0	
	Heating	Running current (A)	16.83		18.65		21.61		24.75	
		Power consumption (kW)	10.96		12.28		14.37		16.46	
		Power factor (%)	94		95		96		96	
		EER (kW/kW) (Energy Efficiency Ratio)	3.92		4.07		3.93		3.83	
		Starting current (A)	1.0		1.0		1.0		1.0	
External dimension (mm)		Height 1,800 x Width 990 x Depth 750								
Total weight	Cooling Only (kg)	256	227	256	256	256	256	256	256	
	Heat Pump (kg)	258	228	258	258	258	258	258	258	
Colour			Silky shade (Munsell 1Y8.5/0.5)							
Compressor	Type	Hermetic type								
	Motor output (kW)	2.3 x 2	1.4 x 2	2.3 x 2		3.1 x 2	2.3 x 2	3.1 x 2		
Fan unit	Fan	Propeller fan								
	Motor output (kW)	0.6								
	Air volume (m³/h)	9,900	9,000	9,900		10,500	9,900	10,500		
Heat exchanger			Finned tube							
Refrigerant R410A Charged amount (* 3)	Cooling Only (kg)	11.0	8.0	11.0	11.0	11.0	11.0	11.0	11.0	
	Heat Pump (kg)	12.5	8.5	12.5	12.5	12.5	12.5	12.5	12.5	
High-pressure switch (MPa)		OFF : 2.90 ON : 3.73								
Protective devices			(* 5)							
Refrigerant pipe spec. (* 4)	Connecting port dia.	Gas side (m)	Ø 22.2	Ø 19.1	Ø 22.2					
		Liquid side (m)	Ø 12.7	Ø 9.5	Ø 12.7					
		Balance side (m)	Ø 9.5							
	Connecting method	Gas side	Brazing							
		Liquid side	Flare							
		Balance side	Flare							
	Max. equivalent length (m)		175							
	Max. real length (m)		150 (If the total bend length exceeds 150m, use the max equivalent length as the standard.)							
	Max. total pipe length (Real length) (m)		300							
	Max. height difference (m)		Outdoor unit is higher than indoor unit : 50							
Outdoor unit is lower than indoor unit : 40 (* 6)										
Control wiring			Shield wire 1.25mm² x 2 cores. up to 2000m							
Central remote controller			When connecting to outdoor unit : (Shield wire) 1.25mm² x 2 cores. up to 1000m, and (Shield wire) 2.0mm² x 2 cores. up to 2000m							
Max. No. of connected indoor units			23		27		30		33	
Sound pressure level (dB(A))		59.5		60		60.5		61		

*** 1 : Rated conditions** Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

The standard piping means that main pipe length is 5 m, branching pipe length 2.5 m of branch piping connected with a 0 meter height.

*** 2 :** The source voltage must not fluctuate more than ±10%.


*** 3 :** The amount does not consider extra piping lengths. Refrigerant must be added on site in accordance with the actual piping length.

*** 4 :** The maximum total piping length indicates the sum of one-way piping lengths on the liquid side or gas side.

System safety protection

*** 5 :** Discharge temp. sensor, Suction temp. sensor, Compressor case thermostat, High-pressure Switch, Over-current sensor, High-pressure Sensor, Low pressure sensor, Over-current relay.

*** 6 :** 30m when the height difference between indoor units exceeds 3m.

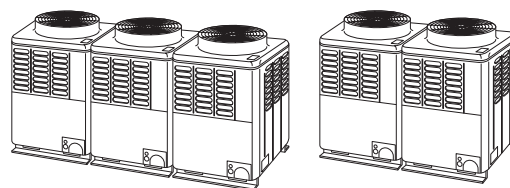

50Hz

Equivalent HP			Equivalent to 22HP				
Set Model name	Cooling Only	MMY-	AP2201T8			AP2211T8	
	Heat Pump	MMY-	AP2201HT8			AP2211HT8	
Outdoor unit type			Inverter				
Outdoor unit model	Cooling Only	MMY-	MAP0801T8	MAP0801T8	MAP0601T8	MAP1201T8	MAP1001T8
	Heat Pump	MMY-	MAP0801HT8	MAP0801HT8	MAP0601HT8	MAP1201HT8	MAP1001HT8
Rated cooling capacity (* 1)			61.5				
Standard heating capacity (* 1)			69.0				
Power supply (* 2)			3 phase 50Hz 400V (380 — 415V)				
Electrical characteristics (* 1)	Cooling	Running current (A)	26.42			31.01	
		Power consumption (kW)	17.39			20.41	
		Power factor (%)	95				
		EER (kW/kW) (Energy Efficiency Ratio)	3.54			3.01	
		Starting current (A)	1.0			1.0	
	Heating	Running current (A)	26.36			28.38	
		Power consumption (kW)	17.35			18.68	
		Power factor (%)	95				
		EER (kW/kW) (Energy Efficiency Ratio)	3.98			3.69	
		Starting current (A)	1.0			1.0	
External dimension (mm)			Height 1,800 x Width 990 x Depth 750				
Total weight	Cooling Only (kg)	256	256	227	256	256	
	Heat Pump (kg)	258	258	228	258	258	
Colour			Silky shade (Munsell 1Y8.5/0.5)				
Compressor	Type	Hermetic type					
	Motor output (kW)	2.3 x 2		1.4 x 2	4.2 x 2	3.1 x 2	
Fan unit	Fan	Propeller fan					
	Motor output (kW)	0.6					
	Air volume (m³/h)	9,900		9,000	10,500		
Heat exchanger			Finned tube				
Refrigerant R410A	Cooling Only (kg)	11.0	11.0	8.0	11.0	11.0	
Charged amount (* 3)	Heat Pump (kg)	12.5	12.5	8.5	12.5	12.5	
High-pressure switch (MPa)			OFF : 2.90 ON : 3.73				
Protective devices			(* 5)				
Refrigerant pipe spec. (* 4)	Connecting port dia.	Gas side (mm)	Ø 22.2		Ø 19.1	Ø 28.6	Ø 22.2
		Liquid side (mm)	Ø 12.7		Ø 9.5	Ø 12.7	
		Balance side (mm)	Ø 9.5				
	Connecting method	Gas side	Brazing				
		Liquid side	Flare				
		Balance side	Flare				
	Max. equivalent length (m)		175				
	Max. real length (m)		150 (If the total bend length exceeds 150m, use the max equivalent length as the standard.)				
	Max. total pipe length (Real length) (m)		300				
	Max. height difference (m)		Outdoor unit is higher than indoor unit : 50				
Outdoor unit is lower than indoor unit : 40 (* 6)							
Control wiring			Shield wire 1.25mm² x 2 cores. up to 2000m				
Central remote controller			When connecting to outdoor unit : (Shield wire) 1.25mm² x 2 cores. up to 1000m, and (Shield wire) 2.0mm² x 2 cores. up to 2000m				
Max. No. of connected indoor units			37				
Sound pressure level (dB(A))			61.5				

***1** : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

The standard piping means that main pipe length is 5 m, branching pipe length 2.5 m of branch piping connected with a 0 meter height.

***2** : The source voltage must not fluctuate more than ±10%.


***3** : The amount does not consider extra piping lengths. Refrigerant must be added on site in accordance with the actual piping length.

***4** : The maximum total piping length indicates the sum of one-way piping lengths on the liquid side or gas side.

System safety protection

***5** : Discharge temp. sensor, Suction temp. sensor, Compressor case thermostat, High-pressure Switch, Over-current sensor, High-pressure Sensor, Low pressure sensor, Over-current relay.

***6** : 30m when the height difference between indoor units exceeds 3m.

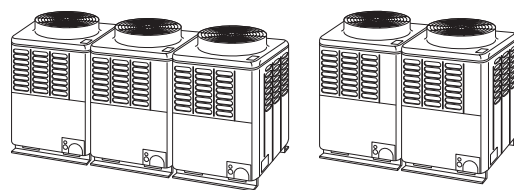
50Hz

Equivalent HP			Equivalent to 24HP				
Set Model name	Cooling Only	MMY-	AP2401T8			AP2411T8	
	Heat Pump	MMY-	AP2401HT8			AP2411HT8	
Outdoor unit type			Inverter				
Outdoor unit model	Cooling Only	MMY-	MAP0801T8	MAP0801T8	MAP0801T8	MAP1201T8	MAP1201T8
	Heat Pump	MMY-	MAP0801HT8	MAP0801HT8	MAP0801HT8	MAP1201HT8	MAP1201HT8
Rated cooling capacity (* 1)		(kW)	68.0				
Standard heating capacity (* 1)		(kW)	76.5				
Power supply (* 2)			3 phase 50Hz 400V (380 — 415V)				
Electrical characteristics (* 1)	Cooling	Running current (A)	27.73			38.02	
		Power consumption (kW)	18.44			25.02	
		Power factor (%)	96			95	
		EER (kW/kW) (Energy Efficiency Ratio)	3.69			2.72	
		Starting current (A)	1.0			1.0	
	Heating	Running current (A)	27.96			32.06	
		Power consumption (kW)	18.79			21.32	
		Power factor (%)	97			96	
		EER (kW/kW) (Energy Efficiency Ratio)	4.07			3.59	
Starting current (A)		1.0			1.0		
External dimension (mm)		Height 1,800 x Width 990 x Depth 750					
Total weight	Cooling Only (kg)	256	256	256	256	256	
	Heat Pump (kg)	258	258	258	258	258	
Colour			Silky shade (Munsell 1Y8.5/0.5)				
Compressor	Type		Hermetic type				
	Motor output (kW)		2.3 x 2			4.2 x 2	
Fan unit	Fan		Propeller fan				
	Motor output (kW)		0.6				
	Air volume (m³/h)		9,900			10,500	
Heat exchanger			Finned tube				
Refrigerant R410A	Cooling Only (kg)	11.0	11.0	11.0	11.0	11.0	
Charged amount (* 3)	Heat Pump (kg)	12.5	12.5	12.5	12.5	12.5	
High-pressure switch (MPa)		OFF : 2.90 ON : 3.73					
Protective devices			(* 5)				
Refrigerant pipe spec. (* 4)	Connecting port dia.	Gas side (mm)	ø 22.2			ø 28.6	
		Liquid side (mm)	ø 12.7				
		Balance side (mm)	ø 9.5				
	Connecting method	Gas side	Brazing				
		Liquid side	Flare				
		Balance side	Flare				
	Max. equivalent length (m)		175				
	Max. real length (m)		150 (If the total bend length exceeds 150m, use the max equivalent length as the standard.)				
	Max. total pipe length (Real length) (m)		300				
	Max. height difference (m)		Outdoor unit is higher than indoor unit : 50				
Outdoor unit is lower than indoor unit : 40 (* 6)							
Control wiring			Shield wire 1.25mm² x 2 cores. up to 2000m				
Central remote controller			When connecting to outdoor unit : (Shield wire) 1.25mm² x 2 cores. up to 1000m, and (Shield wire) 2.0mm² x 2 cores. up to 2000m				
Max. No. of connected indoor units			40				
Sound pressure level (dB(A))			62				

***1 : Rated conditions** Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

The standard piping means that main pipe length is 5 m, branching pipe length 2.5 m of branch piping connected with a 0 meter height.

***2 :** The source voltage must not fluctuate more than ±10%.


***3 :** The amount does not consider extra piping lengths. Refrigerant must be added on site in accordance with the actual piping length.

***4 :** The maximum total piping length indicates the sum of one-way piping lengths on the liquid side or gas side.

System safety protection

***5 :** Discharge temp. sensor, Suction temp. sensor, Compressor case thermostat, High-pressure Switch, Over-current sensor, High-pressure Sensor, Low pressure sensor, Over-current relay.

***6 :** 30m when the height difference between indoor units exceeds 3m.


50Hz

Equivalent HP			Equivalent to 26HP			Equivalent to 28HP			Equivalent to 30HP		
Set Model name	Cooling Only	MMY-	AP2601T8			AP2801T8			AP3001T8		
	Heat Pump	MMY-	AP2601HT8			AP2801HT8			AP3001HT8		
Outdoor unit type			Inverter								
Outdoor unit model	Cooling Only	MMY-	MAP1001T8	MAP0801T8	MAP0801T8	MAP1001T8	MAP1001T8	MAP0801T8	MAP1001T8	MAP1001T8	MAP1001T8
	Heat Pump	MMY-	MAP1001HT8	MAP0801HT8	MAP0801HT8	MAP1001HT8	MAP1001HT8	MAP0801HT8	MAP1001HT8	MAP1001HT8	MAP1001HT8
Rated cooling capacity (* 1)		(kW)	73			78.5			84.0		
Standard heating capacity (* 1)		(kW)	81.5			88.0			95.0		
Power supply (* 2)			3 phase 50Hz 400V (380 — 415V)								
Electrical characteristics (* 1)	Cooling	Running current (A)	30.51			33.48			36.48		
		Power consumption (kW)	20.29			22.27			24.26		
		Power factor (%)	96			96			96		
		EER (kW/kW) (Energy Efficiency Ratio)	3.60			3.52			3.46		
		Starting current (A)	1.0			1.0			1.0		
	Heating	Running current (A)	31.16			33.98			36.93		
		Power consumption (kW)	20.51			22.60			24.82		
		Power factor (%)	95			96			97		
		EER (kW/kW) (Energy Efficiency Ratio)	3.97			3.89			3.83		
		Starting current (A)	1.0			1.0			1.0		
External dimension (mm)		Height 1,800 x Width 990 x Depth 750									
Total weight	Cooling Only (kg)	256	256	256	256	256	256	256	256	256	
	Heat Pump (kg)	258	258	258	258	258	258	258	258	258	
Colour			Silky shade (Munsell 1Y8.5/0.5)								
Compressor	Type	Hermetic type									
	Motor output (kW)	2.3 x 2			3.1 x 2		2.3 x 2		3.1 x 2		
Fan unit	Fan	Propeller fan									
	Motor output (kW)	0.6									
	Air volume (m³/h)	10,500	9,900		10,500		9,900		10,500		
Heat exchanger			Finned tube								
Refrigerant R410A Charged amount (* 3)	Cooling Only (kg)	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	
	Heat Pump (kg)	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	
High-pressure switch (MPa)			OFF : 2.90 ON : 3.73								
Protective devices			(* 5)								
Refrigerant pipe spec. (* 4)	Connecting port dia.	Gas side (mm)	Ø 22.2								
		Liquid side (mm)	Ø 12.7								
		Balance side (mm)	Ø 9.5								
	Connecting method	Gas side	Brazing								
		Liquid side	Flare								
		Balance side	Flare								
	Max. equivalent length (m)		175								
	Max. real length (m)		150 (If the total bend length exceeds 150m, use the max equivalent length as the standard.)								
	Max. total pipe length (Real length) (m)		300								
	Max. height difference (m)		Outdoor unit is higher than indoor unit : 50								
Outdoor unit is lower than indoor unit : 40 (* 6)											
Control wiring			Shield wire 1.25mm² x 2 cores. up to 2000m								
Central remote controller			When connecting to outdoor unit : (Shield wire) 1.25mm² x 2 cores. up to 1000m, and (Shield wire) 2.0mm² x 2 cores. up to 2000m								
Max. No. of connected indoor units			43			47			48		
Sound pressure level (dB(A))			62			62.5			63		

*** 1 : Rated conditions** Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

The standard piping means that main pipe length is 5 m, branching pipe length 2.5 m of branch piping connected with a 0 meter height.

*** 2 :** The source voltage must not fluctuate more than ±10%.


*** 3 :** The amount does not consider extra piping lengths. Refrigerant must be added on site in accordance with the actual piping length.

*** 4 :** The maximum total piping length indicates the sum of one-way piping lengths on the liquid side or gas side.

System safety protection

*** 5 :** Discharge temp. sensor, Suction temp. sensor, Compressor case thermostat, High-pressure Switch, Over-current sensor, High-pressure Sensor, Low pressure sensor, Over-current relay.

*** 6 :** 30m when the height difference between indoor units exceeds 3m.

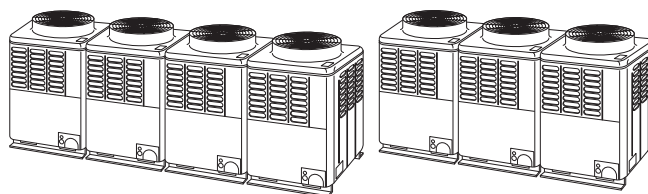

50Hz

Equivalent HP			Equivalent to 32HP							
Set Model name	Cooling Only	MMY-	AP3201T8				AP3211T8			
	Heat Pump	MMY-	AP3201HT8				AP3211HT8			
Outdoor unit type			Inverter							
Outdoor unit model	Cooling Only	MMY-	MAP0801T8	MAP0801T8	MAP0801T8	MAP0801T8	MAP1201T8	MAP1001T8	MAP1001T8	
	Heat Pump	MMY-	MAP0801HT8	MAP0801HT8	MAP0801HT8	MAP0801HT8	MAP1201HT8	MAP1001HT8	MAP1001HT8	
Rated cooling capacity (* 1)			90.0							
Standard heating capacity (* 1)			100.0							
Power supply (* 2)			3 phase 50Hz 400V (380 – 415V)							
Electrical characteristics (* 1)	Cooling	Running current (A)	37.09				43.08			
		Power consumption (kW)	24.41				28.65			
		Power factor (%)	95				96			
		EER (kW/kW) (Energy Efficiency Ratio)	3.69				3.14			
		Starting current (A)	1.0				1.0			
	Heating	Running current (A)	37.32				40.69			
		Power consumption (kW)	24.56				26.78			
		Power factor (%)	95				95			
		EER (kW/kW) (Energy Efficiency Ratio)	4.07				3.73			
		Starting current (A)	1.0				1.0			
External dimension (mm)			Height 1,800 x Width 990 x Depth 750							
Total weight	Cooling Only (kg)	256	256	256	256	256	256	256		
	Heat Pump (kg)	258	258	258	258	258	258	258		
Colour			Silky shade (Munsell 1Y8.5/0.5)							
Compressor	Type	Hermetic type								
	Motor output (kW)	2.3 x 2				4.2 x 2		3.1 x 2		
Fan unit	Fan	Propeller fan								
	Motor output (kW)	0.6								
	Air volume (m³/h)	9,900				10,500				
Heat exchanger			Finned tube							
Refrigerant R410A Charged amount (* 3)	Cooling Only (kg)	11.0	11.0	11.0	11.0	11.0	11.0	11.0		
	Heat Pump (kg)	12.5	12.5	12.5	12.5	12.5	12.5	12.5		
High-pressure switch (MPa)			OFF : 2.90 ON : 3.73							
Protective devices			(*5)							
Refrigerant pipe spec. (* 4)	Connecting port dia.	Gas side (mm)	ø 22.2				ø 28.6		ø 22.2	
		Liquid side (mm)	ø 12.7							
		Balance side (mm)	ø 9.5							
	Connecting method	Gas side	Brazing							
		Liquid side	Flare							
		Balance side	Flare							
	Max. equivalent length (m)		175							
	Max. real length (m)		150 (If the total bend length exceeds 150m, use the max equivalent length as the standard.)							
	Max. total pipe length (Real length) (m)		300							
	Max. height difference (m)		Outdoor unit is higher than indoor unit : 50 Outdoor unit is lower than indoor unit : 40 (* 6)							
Control wiring			Shield wire 1.25mm² x 2 cores. up to 2000m							
Central remote controller			When connecting to outdoor unit : (Shield wire) 1.25mm² x 2 cores. up to 1000m, and (Shield wire) 2.0mm² x 2 cores. up to 2000m							
Max. No. of connected indoor units			48							
Sound pressure level (dB(A))			63							

* 1 : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

The standard piping means that main pipe length is 5 m, branching pipe length 2.5 m of branch piping connected with a 0 meter height.

* 2 : The source voltage must not fluctuate more than ±10%.


* 3 : The amount does not consider extra piping lengths. Refrigerant must be added on site in accordance with the actual piping length.

* 4 : The maximum total piping length indicates the sum of one-way piping lengths on the liquid side or gas side.

System safety protection

* 5 : Discharge temp. sensor, Suction temp. sensor, Compressor case thermostat, High-pressure Switch, Over-current sensor, High-pressure Sensor, Low pressure sensor, Over-current relay.

* 6 : 30m when the height difference between indoor units exceeds 3m.

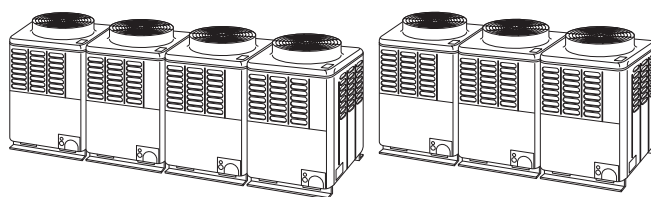

50Hz

Equivalent HP			Equivalent to 34HP						
Set Model name	Cooling Only	MMY-	AP3401T8				AP3411T8		
	Heat Pump	MMY-	AP3401HT8				AP3411HT8		
Outdoor unit type			Inverter						
Outdoor unit model	Cooling Only	MMY-	MAP1001T8	MAP0801T8	MAP0801T8	MAP0801T8	MAP1201T8	MAP1201T8	MAP1001T8
	Heat Pump	MMY-	MAP1001HT8	MAP0801HT8	MAP0801HT8	MAP0801HT8	MAP1201HT8	MAP1201HT8	MAP1001HT8
Rated cooling capacity (* 1)			(kW)		96.0				
Standard heating capacity (* 1)			(kW)		108.0				
Power supply (* 2)			3 phase 50Hz 400V (380 — 415V)						
Electrical characteristics (* 1)	Cooling	Running current (A)	39.89				50.26		
		Power consumption (kW)	26.53				33.08		
		Power factor (%)	96				95		
		EER (kW/kW) (Energy Efficiency Ratio)	3.62				2.90		
		Starting current (A)	1.0				1.0		
	Heating	Running current (A)	40.22				44.42		
		Power consumption (kW)	27.03				29.54		
		Power factor (%)	97				96		
		EER (kW/kW) (Energy Efficiency Ratio)	4.00				3.66		
		Starting current (A)	1.0				1.0		
External dimension (mm)			Height 1,800 x Width 990 x Depth 750						
Total weight	Cooling Only (kg)	256	256	256	256	256	256	256	
	Heat Pump (kg)	258	258	258	258	258	258	258	
Colour			Silky shade (Munsell 1Y8.5/0.5)						
Compressor	Type	Hermetic type							
	Motor output (kW)	3.1 x 2	2.3 x 2			4.2 x 2		3.1 x 2	
Fan unit	Fan	Propeller fan							
	Motor output (kW)	0.6							
	Air volume (m³/h)	10,500	9,900			10,500			
Heat exchanger			Finned tube						
Refrigerant R410A Charged amount (* 3)	Cooling Only (kg)	11.0	11.0	11.0	11.0	11.0	11.0	11.0	
	Heat Pump (kg)	12.5	12.5	12.5	12.5	12.5	12.5	12.5	
High-pressure switch (MPa)			OFF : 2.90 ON : 3.73						
Protective devices			(* 5)						
Refrigerant pipe spec. (* 4)	Connecting port dia.	Gas side (mm)	Ø 22.2				Ø 28.6		Ø 22.2
		Liquid side (mm)	Ø 12.7						
		Balance side (mm)	Ø 9.5						
	Connecting method	Gas side	Brazing						
		Liquid side	Flare						
		Balance side	Flare						
	Max. equivalent length (m)		175						
	Max. real length (m)		150 (If the total bend length exceeds 150m, use the max equivalent length as the standard.)						
	Max. total pipe length (Real length) (m)		300						
	Max. height difference (m)		Outdoor unit is higher than indoor unit : 50 Outdoor unit is lower than indoor unit : 40 (* 6)						
Control wiring			Shield wire 1.25mm² x 2 cores. up to 2000m						
Central remote controller			When connecting to outdoor unit : (Shield wire) 1.25mm² x 2 cores. up to 1000m, and (Shield wire) 2.0mm² x 2 cores. up to 2000m						
Max. No. of connected indoor units			48						
Sound pressure level (dB(A))			63.5				63.5		

***1** : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

The standard piping means that main pipe length is 5 m, branching pipe length 2.5 m of branch piping connected with a 0 meter height.

***2** : The source voltage must not fluctuate more than ±10%.


***3** : The amount does not consider extra piping lengths. Refrigerant must be added on site in accordance with the actual piping length.

***4** : The maximum total piping length indicates the sum of one-way piping lengths on the liquid side or gas side.

System safety protection

***5** : Discharge temp. sensor, Suction temp. sensor, Compressor case thermostat, High-pressure Switch, Over-current sensor, High-pressure Sensor, Low pressure sensor, Over-current relay.

***6** : 30m when the height difference between indoor units exceeds 3m.

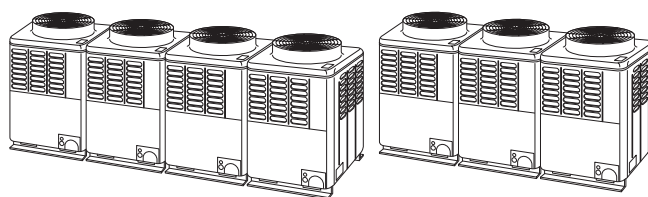

50Hz

Equivalent HP			Equivalent to 36HP						
Set Model name	Cooling Only	MMY-	AP3601T8				AP3611T8		
	Heat Pump	MMY-	AP3601HT8				AP3611HT8		
Outdoor unit type			Inverter						
Outdoor unit model	Cooling Only	MMY-	MAP1001T8	MAP1001T8	MAP0801T8	MAP0801T8	MAP1201T8	MAP1201T8	MAP1201T8
	Heat Pump	MMY-	MAP1001HT8	MAP1001HT8	MAP0801HT8	MAP0801HT8	MAP1201HT8	MAP1201HT8	MAP1201HT8
Rated cooling capacity (* 1)		(kW)	101.0						
Standard heating capacity (* 1)		(kW)	113.0						
Power supply (* 2)			3 phase 50Hz 400V (380 – 415V)						
Electrical characteristics (* 1)	Cooling	Running current (A)	42.67				57.06		
		Power consumption (kW)	28.38				37.16		
		Power factor (%)	96				94		
		EER (kW/kW) (Energy Efficiency Ratio)	3.56				2.72		
		Starting current (A)	1.0				1.0		
	Heating	Running current (A)	43.21				48.36		
		Power consumption (kW)	28.74				31.49		
		Power factor (%)	96				94		
		EER (kW/kW) (Energy Efficiency Ratio)	3.93				3.59		
		Starting current (A)	1.0				1.0		
External dimension (mm)		Height 1,800 x Width 990 x Depth 750							
Total weight	Cooling Only (kg)	256	256	256	256	256	256	256	
	Heat Pump (kg)	258	258	258	258	258	258	258	
Colour			Silky shade (Munsell 1Y8.5/0.5)						
Compressor	Type	Hermetic type							
	Motor output (kW)	3.1 x 2		2.3 x 2		4.2 x 2			
Fan unit	Fan	Propeller fan							
	Motor output (kW)	0.6							
	Air volume (m³/h)	10,500		9,900		10,500			
Heat exchanger			Finned tube						
Refrigerant R410A Charged amount (* 3)	Cooling Only (kg)	11.0	11.0	11.0	11.0	11.0	11.0	11.0	
	Heat Pump (kg)	12.5	12.5	12.5	12.5	12.5	12.5	12.5	
High-pressure switch (MPa)		OFF : 2.90 ON : 3.73							
Protective devices			(* 5)						
Refrigerant pipe spec. (* 4)	Connecting port dia.	Gas side (mm)	ø 22.2				ø 28.6		
		Liquid side (mm)	ø 12.7						
		Balance side (mm)	ø 9.5						
	Connecting method	Gas side	Brazing						
		Liquid side	Flare						
		Balance side	Flare						
	Max. equivalent length (m)		175						
	Max. real length (m)		150 (If the total bend length exceeds 150m, use the max equivalent length as the standard.)						
	Max. total pipe length (Real length) (m)		300						
	Max. height difference (m)		Outdoor unit is higher than indoor unit : 50 Outdoor unit is lower than indoor unit : 40 (* 6)						
Control wiring			Shield wire 1.25mm² x 2 cores. up to 2000m						
Central remote controller			When connecting to outdoor unit : (Shield wire) 1.25mm² x 2 cores. up to 1000m, and (Shield wire) 2.0mm² x 2 cores. up to 2000m						
Max. No. of connected indoor units			48						
Sound pressure level (dB(A))		63.5				64			

*1 : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

The standard piping means that main pipe length is 5 m, branching pipe length 2.5 m of branch piping connected with a 0 meter height.

*2 : The source voltage must not fluctuate more than ±10%.


*3 : The amount does not consider extra piping lengths. Refrigerant must be added on site in accordance with the actual piping length.

*4 : The maximum total piping length indicates the sum of one-way piping lengths on the liquid side or gas side.

System safety protection

*5 : Discharge temp. sensor, Suction temp. sensor, Compressor case thermostat, High-pressure Switch, Over-current sensor, High-pressure Sensor, Low pressure sensor, Over-current relay.

*6 : 30m when the height difference between indoor units exceeds 3m.

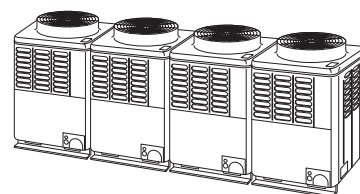

50Hz

Equivalent HP			Equivalent to 38HP				Equivalent to 40HP				
Set Model name		Cooling Only	MMY-	AP3801T8				AP4001T8			
		Heat Pump	MMY-	AP3801HT8				AP4001HT8			
Outdoor unit type			Inverter								
Outdoor unit model		Cooling Only	MMY-	MAP1001T8	MAP1001T8	MAP1001T8	MAP0801T8	MAP1001T8	MAP1001T8	MAP1001T8	MAP1001T8
		Heat Pump	MMY-	MAP1001HT8	MAP1001HT8	MAP1001HT8	MAP0801HT8	MAP1001HT8	MAP1001HT8	MAP1001HT8	MAP1001HT8
Rated cooling capacity (* 1)			(kW)	106.5				112.0			
Standard heating capacity (* 1)			(kW)	119.5				126.5			
Power supply (* 2)			3 phase 50Hz 400V (380 — 415V)								
Electrical characteristics (* 1)	Cooling	Running current	(A)	45.65				48.63			
		Power consumption	(kW)	30.36				32.34			
		Power factor	(%)	96							
		EER (kW/kW) (Energy Efficiency Ratio)	3.51				3.46				
	Heating	Starting current	(A)	1.0				1.0			
		Running current	(A)	46.36				49.69			
		Power consumption	(kW)	30.83				33.05			
		Power factor	(%)	96							
		EER (kW/kW) (Energy Efficiency Ratio)	3.88				3.83				
		Starting current	(A)	1.0				1.0			
External dimension			(mm)	Height 1,800 x Width 990 x Depth 750							
Total weight		Cooling Only	(kg)	256	256	256	256	256	256	256	256
		Heat Pump	(kg)	258	258	258	258	258	258	258	258
Colour			Silky shade (Munsell 1Y8.5/0.5)								
Compressor	Type	Hermetic type									
	Motor output	(kW)	3.1 x 2			2.3 x 2		3.1 x 2			
Fan unit	Fan	Propeller fan									
	Motor output	(kW)	0.6								
	Air volume	(m³/h)	10,500			9,900		10,500			
Heat exchanger			Finned tube								
Refrigerant R410A		Cooling Only	(kg)	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0
Charged amount (* 3)		Heat Pump	(kg)	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5
High-pressure switch			(MPa)	OFF : 2.90 ON : 3.73							
Protective devices			(*5)								
Refrigerant pipe spec. (* 4)	Connecting port dia.	Gas side	(mm)	ø 22.2							
		Liquid side	(mm)	ø 12.7							
		Balance side	(mm)	ø 9.5							
	Connecting method	Gas side	Brazing								
		Liquid side	Flare								
		Balance side	Flare								
	Max. equivalent length		(m)	175							
	Max. real length		(m)	150 (If the total bend length exceeds 150m, use the max equivalent length as the standard.)							
	Max. total pipe length (Real length)		(m)	300							
	Max. height difference		(m)	Outdoor unit is higher than indoor unit : 50							
Outdoor unit is lower than indoor unit : 40 (* 6)											
Control wiring			Shield wire 1.25mm² x 2 cores. up to 2000m								
Central remote controller			When connecting to outdoor unit : (Shield wire) 1.25mm² x 2 cores. up to 1000m, and (Shield wire) 2.0mm² x 2 cores. up to 2000m								
Max. No. of connected indoor units			48								
Sound pressure level			(dB(A))	64							

*** 1 :** Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

The standard piping means that main pipe length is 5 m, branching pipe length 2.5 m of branch piping connected with a 0 meter height.

*** 2 :** The source voltage must not fluctuate more than ±10%.


*** 3 :** The amount does not consider extra piping lengths. Refrigerant must be added on site in accordance with the actual piping length.

*** 4 :** The maximum total piping length indicates the sum of one-way piping lengths on the liquid side or gas side.

System safety protection

*** 5 :** Discharge temp. sensor, Suction temp. sensor, Compressor case thermostat, High-pressure Switch, Over-current sensor, High-pressure Sensor, Low pressure sensor, Over-current relay.

*** 6 :** 30m when the height difference between indoor units exceeds 3m.

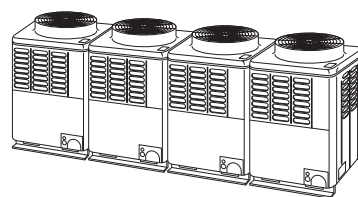

50Hz

Equivalent HP			Equivalent to 42HP				Equivalent to 44HP			
Set Model name	Cooling Only	MMY-	AP4201T8				AP4401T8			
	Heat Pump	MMY-	AP4201HT8				AP4401HT8			
Outdoor unit type			Inverter							
Outdoor unit model	Cooling Only	MMY-	MAP1201T8	MAP1001T8	MAP1001T8	MAP1001T8	MAP1201T8	MAP1201T8	MAP1001T8	MAP1001T8
	Heat Pump	MMY-	MAP1201HT8	MAP1001HT8	MAP1001HT8	MAP1001HT8	MAP1201HT8	MAP1201HT8	MAP1001HT8	MAP1001HT8
Rated cooling capacity (* 1)		(kW)	118.0				123.5			
Standard heating capacity (* 1)		(kW)	132.0				138.5			
Power supply (* 2)			3 phase 50Hz 400V (380 — 415V)							
Electrical characteristics (* 1)	Cooling	Running current (A)	55.24				62.28			
		Power consumption (kW)	36.74				40.99			
		Power factor (%)	96				95			
		EER (kW/kW) (Energy Efficiency Ratio)	3.21				3.01			
		Starting current (A)	1.0				1.0			
	Heating	Running current (A)	5.39				56.76			
		Power consumption (kW)	35.14				37.36			
		Power factor (%)	95							
		EER (kW/kW) (Energy Efficiency Ratio)	3.76				3.69			
		Starting current (A)	1.0				1.0			
External dimension (mm)		Height 1,800 x Width 990 x Depth 750								
Total weight	Cooling Only (kg)	256	256	256	256	256	256	256	256	
	Heat Pump (kg)	258	258	258	258	258	258	258	258	
Colour			Silky shade (Munsell 1Y8.5/0.5)							
Compressor	Type	Hermetic type								
	Motor output (kW)	4.2 x 2	3.1 x 2			4.2 x 2		3.1 x 2		
Fan unit	Fan	Propeller fan								
	Motor output (kW)	0.6								
	Air volume (m³/h)	10,500								
Heat exchanger			Finned tube							
Refrigerant R410A Charged amount (* 3)	Cooling Only (kg)	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	
	Heat Pump (kg)	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	
High-pressure switch (MPa)		OFF : 2.90 ON : 3.73								
Protective devices			(* 5)							
Refrigerant pipe spec. (* 4)	Connecting port dia.	Gas side (mm)	ø 28.6	ø 22.2			ø 28.6		ø 22.2	
		Liquid side (mm)	ø 12.7							
		Balance side (mm)	ø 9.5							
	Connecting method	Gas side	Brazing							
		Liquid side	Flare							
		Balance side	Flare							
	Max. equivalent length (m)		175							
	Max. real length (m)		150 (If the total bend length exceeds 150m, use the max equivalent length as the standard.)							
	Max. total pipe length (Real length) (m)		300							
	Max. height difference (m)		Outdoor unit is higher than indoor unit : 50							
Outdoor unit is lower than indoor unit : 40 (* 6)										
Control wiring			Shield wire 1.25mm² x 2 cores. up to 2000m							
Central remote controller			When connecting to outdoor unit : (Shield wire) 1.25mm² x 2 cores. up to 1000m, and (Shield wire) 2.0mm² x 2 cores. up to 2000m							
Max. No. of connected indoor units			48							
Sound pressure level (dB(A))		64.5								

*1 : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

The standard piping means that main pipe length is 5 m, branching pipe length 2.5 m of branch piping connected with a 0 meter height.

*2 : The source voltage must not fluctuate more than ±10%.


*3 : The amount does not consider extra piping lengths. Refrigerant must be added on site in accordance with the actual piping length.

*4 : The maximum total piping length indicates the sum of one-way piping lengths on the liquid side or gas side.

System safety protection

*5 : Discharge temp. sensor, Suction temp. sensor, Compressor case thermostat, High-pressure Switch, Over-current sensor, High-pressure Sensor, Low pressure sensor, Over-current relay.

*6 : 30m when the height difference between indoor units exceeds 3m.

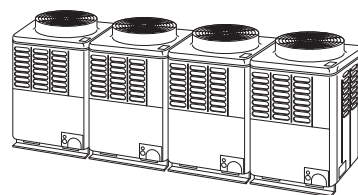

50Hz

Equivalent HP			Equivalent to 46HP				Equivalent to 48HP			
Set Model name	Cooling Only	MMY-	AP4601T8				AP4801T8			
	Heat Pump	MMY-	AP4601HT8				AP4801HT8			
Outdoor unit type			Inverter							
Outdoor unit model	Cooling Only	MMY-	MAP1201T8	MAP1201T8	MAP1201T8	MAP1001T8	MAP1201T8	MAP1201T8	MAP1201T8	MAP1201T8
	Heat Pump	MMY-	MAP1201HT8	MAP1201HT8	MAP1201HT8	MAP1001HT8	MAP1201HT8	MAP1201HT8	MAP1201HT8	MAP1201HT8
Rated cooling capacity (* 1)		(kW)	130.0				135.0			
Standard heating capacity (* 1)		(kW)	145.0				150.0			
Power supply (* 2)			3 phase 50Hz 400V (380 — 415V)							
Electrical characteristics (* 1)	Cooling	Running current (A)	69.27				75.47			
		Power consumption (kW)	45.59				49.67			
		Power factor (%)	95							
		EER (kW/kW) (Energy Efficiency Ratio)	2.85				2.72			
	Heating	Starting current (A)	1.0				1.0			
		Running current (A)	60.55				64.19			
		Power consumption (kW)	39.85				41.80			
		Power factor (%)	95				94			
		EER (kW/kW) (Energy Efficiency Ratio)	3.64				3.59			
		Starting current (A)	1.0				1.0			
External dimension (mm)		Height 1,800 x Width 990 x Depth 750								
Total weight	Cooling Only (kg)	256	256	256	256	256	256	256	256	
	Heat Pump (kg)	258	258	258	258	258	258	258	258	
Colour			Silky shade (Munsell 1Y8.5/0.5)							
Compressor	Type	Hermetic type								
	Motor output (kW)	4.2 x 2			3.1 x 2		4.2 x 2			
Fan unit	Fan	Propeller fan								
	Motor output (kW)	0.6								
	Air volume (m³/h)	10,500								
Heat exchanger			Finned tube							
Refrigerant R410A Charged amount (* 3)	Cooling Only (kg)	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	
	Heat Pump (kg)	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	
High-pressure switch (MPa)		OFF : 2.90 ON : 3.73								
Protective devices			(* 5)							
Refrigerant pipe spec. (* 4)	Connecting port dia.	Gas side (mm)	ø 28.6			ø 22.2		ø 28.6		
		Liquid side (mm)	ø 12.7							
		Balance side (mm)	ø 9.5							
	Connecting method	Gas side	Brazing							
		Liquid side	Flare							
		Balance side	Flare							
	Max. equivalent length (m)		160							
	Max. real length (m)		135 (If the total bend length exceeds 135m, use the max equivalent length as the standard.)							
	Max. total pipe length (Real length) (m)		300							
	Max. height difference (m)		Outdoor unit is higher than indoor unit : 50							
Outdoor unit is lower than indoor unit : 40 (* 6)										
Control wiring			Shield wire 1.25mm² x 2 cores. up to 2000m							
Central remote controller			When connecting to outdoor unit : (Shield wire) 1.25mm² x 2 cores. up to 1000m, and (Shield wire) 2.0mm² x 2 cores. up to 2000m							
Max. No. of connected indoor units			48							
Sound pressure level (dB(A))			65							

*** 1 :** Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

The standard piping means that main pipe length is 5 m, branching pipe length 2.5 m of branch piping connected with a 0 meter height.

*** 2 :** The source voltage must not fluctuate more than ±10%.

*** 3 :** The amount does not consider extra piping lengths. Refrigerant must be added on site in accordance with the actual piping length.


*** 4 :** The maximum total piping length indicates the sum of one-way piping lengths on the liquid side or gas side.

System safety protection

*** 5 :** Discharge temp. sensor, Suction temp. sensor, Compressor case thermostat, High-pressure Switch, Over-current sensor, High-pressure Sensor, Low pressure sensor, Over-current relay.

*** 6 :** 30m when the height difference between indoor units exceeds 3m.

60Hz



Outdoor unit (60Hz)

Equivalent HP			Equivalent to 5HP	Equivalent to 6HP	Equivalent to 8HP	Equivalent to 10HP	Equivalent to 12HP		
Model name	Heat Pump		MMY-	MAP0501HT7	MAP0601HT7	MAP0801HT7	MAP1001HT7	MAP1201HT7	
Outdoor unit type			Inverter unit						
Cooling capacity (* 1)			(kW)	14.0	16.0	22.4	28.0	33.5	
Standard heating capacity (* 1)			(kW)	16.0	18.0	25.0	31.5	37.5	
Power supply (* 2)			3 phase 60Hz 380V						
Electrical characteristics (* 1)	Cooling	Running current	(A)	6.16	7.66	9.07	12.16	19.27	
		Power consumption	(kW)	3.65	4.64	5.67	7.68	11.92	
		Power factor	(%)	90	92	95	96	94	
		EER (Energy Efficiency Ratio)	(kW/kW)	3.84	3.45	3.95	3.65	2.81	
		Starting current	(A)	1.0	1.0	1.0	1.0	1.0	
	Heating	Running current	(A)	6.41	7.45	9.40	12.61	16.47	
		Power consumption	(kW)	3.84	4.56	5.88	7.97	10.19	
		Power factor	(%)	91	93	95	96	94	
		EER (Energy Efficiency Ratio)	(kW/kW)	4.17	3.95	4.25	3.95	3.68	
		Starting current	(A)	1.0	1.0	1.0	1.0	1.0	
External dimension			(mm)	Height 1,800 x Width 990 x Depth 750					
Total weight			(kg)	228		258			
Colour			Silky shade (Munsell 1Y8.5/0.5)						
Compressor	Type	Hermetic type							
	Motor output	(kW)	1.1 x 2	1.4 x 2	2.3 x 2	3.1 x 2	4.2 x 2		
Fan unit	Fan	Propeller fan							
	Motor output	(kW)	0.60						
	Air volume	(m³/h)	9,000		9,900	10,500			
Heat exchanger			Finned tube						
Refrigerant R410A(Charged refrigerant amount) (* 3)			(kg)	R410A (8.5)		R410A (12.5)			
High-pressure switch			(MPa)	OFF : 2.90 ON : 3.73					
Protective devices			(* 5)						
Refrigerant piping specifications (* 4)	Connecting port dia	Gas side	(mm)	ø 15.9	ø 19.1	ø 22.2		ø 28.6	
		Liquid side	(mm)	ø 9.5		ø 12.7			
		Balance pipe	(mm)	ø 9.5					
	Connecting method	Gas side		Flare	Brazing				
		Liquid side		Flare					
		Balance pipe		Flare					
	Max. equivalent length		(m)	175					
	Max. real length		(m)	150 (If the total bend length exceeds 150m, use the max equivalent length as the standard.)					
	Max. total pipe length (Real length)		(m)	300					
	Max. height difference		(m)	Outdoor unit is higher than indoor unit : 50					
Outdoor unit is lower than indoor unit : 40 (* 6)									
Control wiring			Shield wire 1.25mm² x 2 cores. up to 2000m						
Central remote controller			When connecting to outdoor unit : (Shield wire) 1.25mm² x 2 cores. up to 1000m, and (Shield wire) 2.0mm² x 2 cores. up to 2000m						
Max. No. of connected indoor units			8	10	13	16	20		
Sound pressure level			(dB(A))	55	56	57	58	59	

*** 1 : Rated conditions** Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

The standard piping means that main pipe length is 5 m, branching pipe length 2.5 m of branch piping connected with a 0 meter height.

*** 2 :** The source voltage must not fluctuate more than $\pm 10\%$.


*** 3 :** The amount does not consider extra piping lengths. Refrigerant must be added on site in accordance with the actual piping length.

*** 4 :** The maximum total piping length indicates the sum of one-way piping lengths on the liquid side or gas side.

System safety protection

*** 5 :** Discharge temp. sensor, Suction temp. sensor, Compressor case thermostat, High-pressure Switch, Over-current sensor, High-pressure Sensor, Low pressure sensor, Over-current relay.

*** 6 :** 30m when the height difference between indoor units exceeds 3m.



60Hz

Outdoor unit (Combination) (60Hz)

Equivalent HP			Equivalent to 14HP		Equivalent to 16HP		Equivalent to 18HP		Equivalent to 20HP		
Set Model name	Heat Pump	MMY-	AP1401HT7		AP1601HT7		AP1801HT7		AP2001HT7		
Outdoor unit type			Inverter								
Outdoor unit type	Heat Pump	MMY-	MAP0801HT7	MAP0601HT7	MAP0801HT7	MAP0801HT7	MAP1001HT7	MAP0801HT7	MAP1001HT7	MAP1001HT7	
Rated cooling capacity (* 1)		(kW)	38.4		45		50.4		56.0		
Standard heating capacity (* 1)		(kW)	43.0		50.0		56.5		63.0		
Power supply (* 2)			3 phase 60Hz 380V								
Electrical characteristics (* 1)	Cooling	Running current (A)	17.97		19.51		22.41		25.59		
		Power consumption (kW)	11.12		12.20		14.16		16.17		
		Power factor (%)	94		95		96		96		
		EER (kW/kW) (Energy Efficiency Ratio)	3.45		3.69		3.56		3.46		
	Heating	Starting current (A)	1.0		1.0		1.0		1.0		
		Running current (A)	17.72		19.64		22.74		26.05		
		Power consumption (kW)	10.96		12.28		14.37		16.46		
		Power factor (%)	94		95		96		96		
		EER (kW/kW) (Energy Efficiency Ratio)	3.92		4.07		3.93		3.83		
Starting current (A)	1.0		1.0		1.0		1.0				
External dimension (mm)			Height 1,800 x Width 990 x Depth 750								
Total weight (kg)			258	228	258	258	258	258	258	258	
Colour			Silky shade (Munsell 1Y8.5/0.5)								
Compressor	Type		Hermetic type								
	Motor output (kW)		2.3 x 2	1.4 x 2	2.3 x 2		3.1 x 2	2.3 x 2	3.1 x 2		
Fan unit	Fan		Propeller fan								
	Motor output (kW)		0.6								
	Air volume (m³/h)		9,900	9,000	9,900		10,500	9,900	10,5000		
Heat exchanger			Finned tube								
Refrigerant R410A Charged amount (* 3) (kg)			12.5	8.5	12.5						
High-pressure switch (MPa)			OFF : 2.90 ON : 3.73								
Protective devices			(* 5)								
Refrigerant pipe spec. (* 4)	Connecting port dia.	Gas side (mm)	ø 22.2	ø 19.1	ø 22.2						
		Liquid side (mm)	ø 12.7	ø 9.5	ø 12.7						
		Balance side (mm)	ø 9.5								
	Connecting method	Gas side		Brazing							
		Liquid side		Flare							
		Balance side		Flare							
	Max. equivalent length (m)		175								
	Max. real length (m)		150 (If the total bend length exceeds 150m, use the max equivalent length as the standard.)								
	Max. total pipe length (Real length) (m)		300								
	Max. height difference (m)		Outdoor unit is higher than indoor unit : 50								
Outdoor unit is lower than indoor unit : 40 (* 6)											
Control wiring			Shield wire 1.25mm² x 2 cores. up to 2000m								
Central remote controller			When connecting to outdoor unit : (Shield wire) 1.25mm² x 2 cores. up to 1000m, and (Shield wire) 2.0mm² x 2 cores. up to 2000m								
Max. No. of connected indoor units			23		27		30		33		
Sound pressure level (dB(A))			59.5		60		60.5		61		

* 1 : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

The standard piping means that main pipe length is 5 m, branching pipe length 2.5 m of branch piping connected with a 0 meter height.

* 2 : The source voltage must not fluctuate more than ±10%.


* 3 : The amount does not consider extra piping lengths. Refrigerant must be added on site in accordance with the actual piping length.

* 4 : The maximum total piping length indicates the sum of one-way piping lengths on the liquid side or gas side.

System safety protection

* 5 : Discharge temp. sensor, Suction temp. sensor, Compressor case thermostat, High-pressure Switch, Over-current sensor, High-pressure Sensor, Low pressure sensor, Over-current relay.

* 6 : 30m when the height difference between indoor units exceeds 3m.

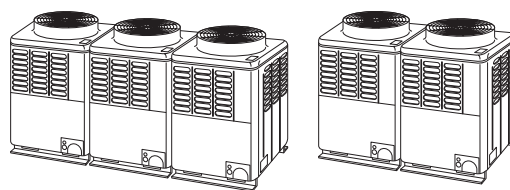

60Hz

Equivalent HP			Equivalent to 22HP				
Set Model name	Heat Pump	MMY-	AP2201HT7			AP2211HT7	
Outdoor unit type			Inverter				
Outdoor unit model	Heat Pump	MMY-	MAP0801HT7	MAP0801HT7	MAP0601HT7	MAP1201HT7	MAP1001HT7
Rated cooling capacity (* 1)		(kW)	61.5				
Standard heating capacity (* 1)		(kW)	69.0				
Power supply (*2)			3 phase 60Hz 380V				
Electrical characteristics (* 1)	Cooling	Running current (A)	27.81			32.64	
		Power consumption (kW)	17.39			20.41	
		Power factor (%)	95				
		EER (kW/kW) (Energy Efficiency Ratio)	3.54			3.01	
		Starting current (A)	1.0			1.0	
	Heating	Running current (A)	27.75			29.88	
		Power consumption (kW)	17.35			18.68	
		Power factor (%)	95				
		EER (kW/kW) (Energy Efficiency Ratio)	3.98			3.69	
		Starting current (A)	1.0			1.0	
External dimension (mm)		Height 1,800 x Width 990 x Depth 750					
Total weight (kg)		258	258	228	258	258	
Colour			Silky shade (Munsell 1Y8.5/0.5)				
Compressor	Type	Hermetic type					
	Motor output (kW)	2.3 x 2		1.4 x 2		4.2 x 2 3.1 x 2	
Fan unit	Fan	Propeller fan					
	Motor output (kW)	0.6					
	Air volume (m³/h)	9,900		9,000		10,500	
Heat exchanger			Finned tube				
Refrigerant R410A Charged amount (* 3) (kg)		12.5		8.5		12.5	
High-pressure switch (MPa)		OFF : 2.90 ON : 3.73					
Protective devices			(* 5)				
Refrigerant pipe spec. (* 4)	Connecting port dia.	Gas side (mm)	Ø 22.2		Ø 19.1		Ø 28.6 Ø 22.2
		Liquid side (mm)	Ø 12.7		Ø 9.5		Ø 12.7
		Balance side (mm)	Ø 9.5				
	Connecting method	Gas side	Brazing				
		Liquid side	Flare				
		Balance side	Flare				
	Max. equivalent length (m)		175				
	Max. real length (m)		150 (If the total bend length exceeds 150m, use the max equivalent length as the standard.)				
	Max. total pipe length (Real length) (m)		300				
	Max. height difference (m)		Outdoor unit is higher than indoor unit : 50				
Outdoor unit is lower than indoor unit : 40 (* 6)							
Control wiring			Shield wire 1.25mm² x 2 cores. up to 2000m				
Central remote controller			When connecting to outdoor unit : (Shield wire) 1.25mm² x 2 cores. up to 1000m, and (Shield wire) 2.0mm² x 2 cores. up to 2000m				
Max. No. of connected indoor units			37				
Sound pressure level (dB(A))		61.5					

* 1 : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

The standard piping means that main pipe length is 5 m, branching pipe length 2.5 m of branch piping connected with a 0 meter height.

* 2 : The source voltage must not fluctuate more than ±10%.


* 3 : The amount does not consider extra piping lengths. Refrigerant must be added on site in accordance with the actual piping length.

* 4 : The maximum total piping length indicates the sum of one-way piping lengths on the liquid side or gas side.

System safety protection

* 5 : Discharge temp. sensor, Suction temp. sensor, Compressor case thermostat, High-pressure Switch, Over-current sensor, High-pressure Sensor, Low pressure sensor, Over-current relay.

* 6 : 30m when the height difference between indoor units exceeds 3m.

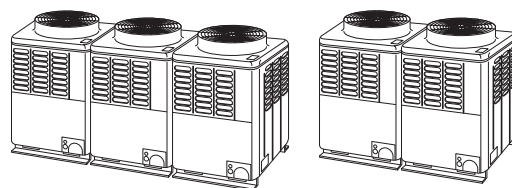
60Hz

Equivalent HP			Equivalent to 24HP				
Set Model name	Heat Pump	MMY-	AP2401HT7			AP2411HT7	
Outdoor unit type			Inverter				
Outdoor unit model	Heat Pump	MMY-	MAP0801HT7	MAP0801HT7	MAP0801HT7	MAP1201HT7	MAP1201HT7
Rated cooling capacity (* 1)		(kW)	68.0				
Standard heating capacity (* 1)		(kW)	76.5				
Power supply (* 2)			3 phase 60Hz 380V				
Electrical characteristics (* 1)	Cooling	Running current (A)	29.19			40.02	
		Power consumption (kW)	18.44			25.02	
		Power factor (%)	96			95	
		EER (kW/kW) (Energy Efficiency Ratio)	3.69			2.72	
		Starting current (A)	1.0			1.0	
	Heating	Running current (A)	29.43			33.74	
		Power consumption (kW)	18.79			21.32	
		Power factor (%)	97			96	
		EER (kW/kW) (Energy Efficiency Ratio)	4.07			3.59	
		Starting current (A)	1.0			1.0	
External dimension (mm)		Height 1,800 x Width 990 x Depth 750					
Total weight (kg)		258	258	258	258	258	
Colour			Silky shade (Munsell 1Y8.5/0.5)				
Compressor	Type	Hermetic type					
	Motor output (kW)	2.3 x 2			4.2 x 2		
Fan unit	Fan	Propeller fan					
	Motor output (kW)	0.6					
	Air volume (m³/h)	9,900			10,500		
Heat exchanger			Finned tube				
Refrigerant R410A Charged amount (* 3)		(kg)	12.5				
High-pressure switch (MPa)		OFF : 2.90 ON : 3.73					
Protective devices			(* 5)				
Refrigerant pipe spec. (* 4)	Connecting port dia.	Gas side (mm)	ø 22.2			ø 28.6	
		Liquid side (mm)	ø 12.7				
		Balance side (mm)	ø 9.5				
	Connecting method	Gas side	Brazing				
		Liquid side	Flare				
		Balance side	Flare				
	Max. equivalent length (m)		175				
	Max. real length (m)		150 (If the total bend length exceeds 150m, use the max equivalent length as the standard.)				
	Max. total pipe length (Real length) (m)		300				
	Max. height difference (m)		Outdoor unit is higher than indoor unit : 50				
			Outdoor unit is lower than indoor unit : 40 (* 6)				
Control wiring			Shield wire 1.25mm² x 2 cores. up to 2000m				
Central remote controller			When connecting to outdoor unit : (Shield wire) 1.25mm² x 2 cores. up to 1000m, and (Shield wire) 2.0mm² x 2 cores. up to 2000m				
Max. No. of connected indoor units			40				
Sound pressure level (dB(A))			62				

*** 1 : Rated conditions** Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

The standard piping means that main pipe length is 5 m, branching pipe length 2.5 m of branch piping connected with a 0 meter height.

*** 2 :** The source voltage must not fluctuate more than ±10%.


*** 3 :** The amount does not consider extra piping lengths. Refrigerant must be added on site in accordance with the actual piping length.

*** 4 :** The maximum total piping length indicates the sum of one-way piping lengths on the liquid side or gas side.

System safety protection

*** 5 :** Discharge temp. sensor, Suction temp. sensor, Compressor case thermostat, High-pressure Switch, Over-current sensor, High-pressure Sensor, Low pressure sensor, Over-current relay.

*** 6 :** 30m when the height difference between indoor units exceeds 3m.


60Hz

Equivalent HP			Equivalent to 26HP			Equivalent to 28HP			Equivalent to 30HP			
Set Model name		Heat Pump	MMY-	AP2601HT7			AP2801HT7			AP3001HT7		
Outdoor unit type			Inverter									
Outdoor unit model		Heat Pump	MMY-	MAP1001HT7	MAP0801HT7	MAP0801HT7	MAP1001HT7	MAP1001HT7	MAP0801HT7	MAP1001HT7	MAP1001HT7	
Rated cooling capacity (* 1)		(kW)		73			78.5			84.0		
Standard heating capacity (* 1)		(kW)		81.5			88.0			95.0		
Power supply (*2)			3 phase 60Hz 380V									
Electrical characteristics (* 1)	Cooling	Running current (A)		32.11			35.25			38.40		
		Power consumption (kW)		20.29			22.27			24.26		
		Power factor (%)					96					
		EER (kW/kW) (Energy Efficiency Ratio)		3.60			3.52			3.46		
		Starting current (A)		1.0			1.0			1.0		
	Heating	Running current (A)		32.80			35.77			38.88		
		Power consumption (kW)		20.51			22.60			24.82		
		Power factor (%)		95			96			97		
		EER (kW/kW) (Energy Efficiency Ratio)		3.97			3.89			3.83		
		Starting current (A)		1.0			1.0			1.0		
External dimension (mm)			Height 1,800 x Width 990 x Depth 750									
Total weight (kg)			258	258	258	258	258	258	258	258	258	
Colour			Silky shade (Munsell 1Y8.5/0.5)									
Compressor	Type		Hermetic type									
	Motor output (kW)		2.3 x 2			3.1 x 2		2.3 x 2	3.1 x 2			
Fan unit	Fan		Propeller fan									
	Motor output (kW)		0.6									
	Air volume (m³/h)		10,500	9,900		10,500		9,900	10,500			
Heat exchanger			Finned tube									
Refrigerant R410A Charged amount (* 3) (kg)			12.5									
High-pressure switch (MPa)			OFF : 2.90 ON : 3.73									
Protective devices			(* 5)									
Refrigerant pipe spec. (* 4)	Connecting port dia.	Gas side (mm)	Ø 22.2									
		Liquid side (mm)	Ø 12.7									
		Balance side (mm)	Ø 9.5									
	Connecting method	Gas side	Brazing									
		Liquid side	Flare									
		Balance side	Flare									
	Max. equivalent length (m)		175									
	Max. real length (m)		150 (If the total bend length exceeds 150m, use the max equivalent length as the standard.)									
	Max. total pipe length (Real length) (m)		300									
	Max. height difference (m)		Outdoor unit is higher than indoor unit : 50									
Outdoor unit is lower than indoor unit : 40 (* 6)												
Control wiring			Shield wire 1.25mm² x 2 cores. up to 2000m									
Central remote controller			When connecting to outdoor unit : (Shield wire) 1.25mm² x 2 cores. up to 1000m, and (Shield wire) 2.0mm² x 2 cores. up to 2000m									
Max. No. of connected indoor units			43			47			48			
Sound pressure level (dB(A))			62			62.5			63			

*** 1 : Rated conditions** Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

The standard piping means that main pipe length is 5 m, branching pipe length 2.5 m of branch piping connected with a 0 meter height.

*** 2 :** The source voltage must not fluctuate more than ±10%.


*** 3 :** The amount does not consider extra piping lengths. Refrigerant must be added on site in accordance with the actual piping length.

*** 4 :** The maximum total piping length indicates the sum of one-way piping lengths on the liquid side or gas side.

System safety protection

*** 5 :** Discharge temp. sensor, Suction temp. sensor, Compressor case thermostat, High-pressure Switch, Over-current sensor, High-pressure Sensor, Low pressure sensor, Over-current relay.

*** 6 :** 30m when the height difference between indoor units exceeds 3m.

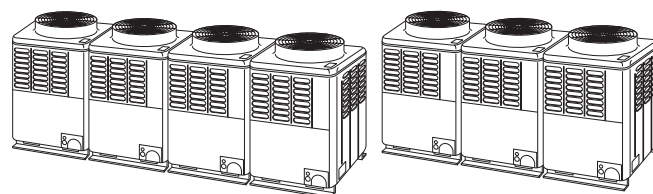

60Hz

Equivalent HP			Equivalent to 32HP							
Set Model name	Heat Pump	MMY-	AP3201HT7				AP3211HT7			
Outdoor unit type			Inverter							
Outdoor unit model	Heat Pump	MMY-	MAP0801HT7	MAP0801HT7	MAP0801HT7	MAP0801HT7	MAP1201HT7	MAP1001HT7	MAP1001HT7	
Rated cooling capacity (* 1)		(kW)	90.0							
Standard heating capacity (* 1)		(kW)	100.0							
Power supply (*2)			3 phase 60Hz 380V							
Electrical characteristics (* 1)	Cooling	Running current (A)	39.04				45.34			
		Power consumption (kW)	24.41				28.65			
		Power factor (%)	95				96			
		EER (kW/kW) (Energy Efficiency Ratio)	3.69				3.14			
		Starting current (A)	1.0				1.0			
	Heating	Running current (A)	39.28				42.83			
		Power consumption (kW)	24.56				26.78			
		Power factor (%)	95				95			
		EER (kW/kW) (Energy Efficiency Ratio)	4.07				3.73			
		Starting current (A)	1.0				1.0			
External dimension (mm)		Height 1,800 x Width 990 x Depth 750								
Total weight (kg)		258	258	258	258	258	258	258		
Colour			Silky shade (Munsell 1Y8.5/0.5)							
Compressor	Type		Hermetic type							
	Motor output (kW)		2.3 x 2				4.2 x 2	3.1 x 2		
Fan unit	Fan		Propeller fan							
	Motor output (kW)		0.6							
	Air volume (m³/h)		9,900				10,500			
Heat exchanger			Finned tube							
Refrigerant R410A Charged amount (* 3)		(kg)	12.5							
High-pressure switch (MPa)		OFF : 2.90 ON : 3.73								
Protective devices			(* 5)							
Refrigerant pipe spec. (* 4)	Connecting port dia.	Gas side (mm)	Ø 22.2				Ø 28.6	Ø 22.2		
		Liquid side (mm)	Ø 12.7							
		Balance side (mm)	Ø 9.5							
	Connecting method	Gas side		Brazing						
		Liquid side		Flare						
		Balance side		Flare						
	Max. equivalent length (m)		175							
	Max. real length (m)		150 (If the total bend length exceeds 150m, use the max equivalent length as the standard.)							
	Max. total pipe length (Real length) (m)		300							
	Max. height difference (m)		Outdoor unit is higher than indoor unit : 50							
Outdoor unit is lower than indoor unit : 40 (* 6)										
Control wiring			Shield wire 1.25mm² x 2 cores. up to 2000m							
Central remote controller			When connecting to outdoor unit : MVVS (Shield wire) 1.25mm² x 2 cores. up to 1000m, and MVVS (Shield wire) 2.0mm² x 2 cores. up to 2000m							
Max. No. of connected indoor units			48							
Sound pressure level (dB(A))			63							

***1 : Rated conditions** Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

The standard piping means that main pipe length is 5 m, branching pipe length 2.5 m of branch piping connected with a 0 meter height.

***2 :** The source voltage must not fluctuate more than ±10%.


***3 :** The amount does not consider extra piping lengths. Refrigerant must be added on site in accordance with the actual piping length.

***4 :** The maximum total piping length indicates the sum of one-way piping lengths on the liquid side or gas side.

System safety protection

***5 :** Discharge temp. sensor, Suction temp. sensor, Compressor case thermostat, High-pressure Switch, Over-current sensor, High-pressure Sensor, Low pressure sensor, Over-current relay.

***6 :** 30m when the height difference between indoor units exceeds 3m.

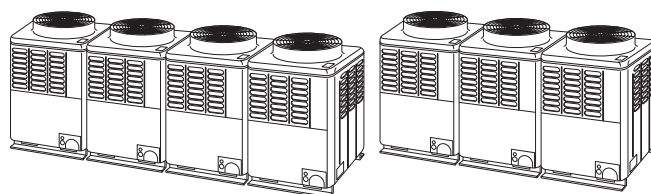

60Hz

Equivalent HP			Equivalent to 34HP						
Set Model name	Heat Pump	MMY-	AP3401HT7				AP3411HT7		
Outdoor unit type			Inverter						
Outdoor unit model	Heat Pump	MMY-	MAP1001HT7	MAP0801HT7	MAP0801HT7	MAP0801HT7	MAP1201HT7	MAP1201HT7	MAP1001HT7
Rated cooling capacity (* 1)		(kW)	96.0						
Standard heating capacity (* 1)		(kW)	108.0						
Power supply (* 2)			3 phase 60Hz 380V						
Electrical characteristics (* 1)	Cooling	Running current (A)	41.99				52.91		
		Power consumption (kW)	26.53				33.08		
		Power factor (%)	96				95		
		EER (kW/kW) (Energy Efficiency Ratio)	3.62				2.90		
		Starting current (A)	1.0				1.0		
	Heating	Running current (A)	42.34				46.75		
		Power consumption (kW)	27.03				29.54		
		Power factor (%)	97				96		
		EER (kW/kW) (Energy Efficiency Ratio)	4.00				3.66		
		Starting current (A)	1.0				1.0		
External dimension (mm)		Height 1,800 x Width 990 x Depth 750							
Total weight (kg)		258	258	258	258	258	258	258	
Colour			Silky shade (Munsell 1Y8.5/0.5)						
Compressor	Type	Hermetic type							
	Motor output (kW)	3.1 x 2	2.3 x 2			4.2 x 2		3.1 x 2	
Fan unit	Fan	Propeller fan							
	Motor output (kW)	0.6							
	Air volume (m³/h)	10,500	9,900			10,500		9,900	
Heat exchanger			Finned tube						
Refrigerant R410A Charged amount (* 3)		(kg)	12.5						
High-pressure switch (MPa)		OFF : 2.90 ON : 3.73							
Protective devices			(* 5)						
Refrigerant pipe spec. (* 4)	Connecting port dia.	Gas side (mm)	Ø 22.2				Ø 28.6		Ø 22.2
		Liquid side (mm)	Ø 12.7						
		Balance side (mm)	Ø 9.5						
	Connecting method	Gas side	Brazing						
		Liquid side	Flare						
		Balance side	Flare						
	Max. equivalent length (m)		175						
	Max. real length (m)		150 (If the total bend length exceeds 150m, use the max equivalent length as the standard.)						
	Max. total pipe length (Real length) (m)		300						
	Max. height difference (m)		Outdoor unit is higher than indoor unit : 50						
Outdoor unit is lower than indoor unit : 40 (* 6)									
Control wiring			Shield wire 1.25mm² x 2 cores. up to 2000m						
Central remote controller			When connecting to outdoor unit : (Shield wire) 1.25mm² x 2 cores. up to 1000m, and (Shield wire) 2.0mm² x 2 cores. up to 2000m						
Max. No. of connected indoor units			48						
Sound pressure level (dB(A))		63.5				63.5			

* 1 : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

The standard piping means that main pipe length is 5 m, branching pipe length 2.5 m of branch piping connected with a 0 meter height.

* 2 : The source voltage must not fluctuate more than ±10%.


* 3 : The amount does not consider extra piping lengths. Refrigerant must be added on site in accordance with the actual piping length.

* 4 : The maximum total piping length indicates the sum of one-way piping lengths on the liquid side or gas side.

System safety protection

* 5 : Discharge temp. sensor, Suction temp. sensor, Compressor case thermostat, High-pressure Switch, Over-current sensor, High-pressure Sensor, Low pressure sensor, Over-current relay.

* 6 : 30m when the height difference between indoor units exceeds 3m.

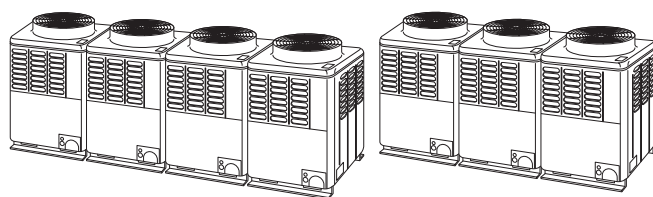

60Hz

Equivalent HP			Equivalent to 36HP						
Set Model name	Heat Pump	MMY-	AP3601HT7				AP3611HT7		
Outdoor unit type			Inverter						
Outdoor unit model	Heat Pump	MMY-	MAP1001HT7	MAP1001HT7	MAP0801HT7	MAP0801HT7	MAP1201HT7	MAP1201HT7	MAP1201HT7
Rated cooling capacity (* 1)		(kW)	101.0						
Standard heating capacity (* 1)		(kW)	113.0						
Power supply (* 2)			3 phase 60Hz 380V						
Electrical characteristics (* 1)	Cooling	Running current (A)	44.92				60.06		
		Power consumption (kW)	28.38				37.16		
		Power factor (%)	96				94		
		EER (kW/kW) (Energy Efficiency Ratio)	3.56				2.72		
		Starting current (A)	1.0				1.0		
	Heating	Running current (A)	45.49				50.90		
		Power consumption (kW)	28.74				31.49		
		Power factor (%)	96				94		
		EER (kW/kW) (Energy Efficiency Ratio)	3.93				3.59		
		Starting current (A)	1.0				1.0		
External dimension (mm)		Height 1,800 x Width 990 x Depth 750							
Total weight (kg)		258	258	258	258	258	258	258	
Colour			Silky shade (Munsell 1Y8.5/0.5)						
Compressor	Type	Hermetic type							
	Motor output (kW)	3.1 x 2		2.3 x 2		4.2 x 2			
Fan unit	Fan	Propeller fan							
	Motor output (kW)	0.6							
	Air volume (m³/h)	10,500		9,900		10,500			
Heat exchanger			Finned tube						
Refrigerant R410A Charged amount (* 3)		(kg)	12.5						
High-pressure switch		(MPa)	OFF : 2.90 ON : 3.73						
Protective devices			(* 5)						
Refrigerant pipe spec. (* 4)	Connecting port dia.	Gas side (mm)	Ø 22.2				Ø 28.6		
		Liquid side (mm)	Ø 12.7						
		Balance side (mm)	Ø 9.5						
	Connecting method	Gas side	Brazing						
		Liquid side	Flare						
		Balance side	Flare						
	Max. equivalent length (m)		175						
	Max. real length (m)		150 (If the total bend length exceeds 150m, use the max equivalent length as the standard.)						
	Max. total pipe length (Real length) (m)		300						
	Max. height difference (m)		Outdoor unit is higher than indoor unit : 50 Outdoor unit is lower than indoor unit : 40 (* 6)						
Control wiring			Shield wire 1.25mm² x 2 cores. up to 2000m						
Central remote controller			When connecting to outdoor unit : (Shield wire) 1.25mm² x 2 cores. up to 1000m, and (Shield wire) 2.0mm² x 2 cores. up to 2000m						
Max. No. of connected indoor units			48						
Sound pressure level (dB(A))		63.5				64			

* 1 : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

The standard piping means that main pipe length is 5 m, branching pipe length 2.5 m of branch piping connected with a 0 meter height.

* 2 : The source voltage must not fluctuate more than ± 10%.


* 3 : The amount does not consider extra piping lengths. Refrigerant must be added on site in accordance with the actual piping length.

* 4 : The maximum total piping length indicates the sum of one-way piping lengths on the liquid side or gas side.

System safety protection

* 5 : Discharge temp. sensor, Suction temp. sensor, Compressor case thermostat, High-pressure Switch, Over-current sensor, High-pressure Sensor, Low pressure sensor, Over-current relay.

* 6 : 30m when the height difference between indoor units exceeds 3m.

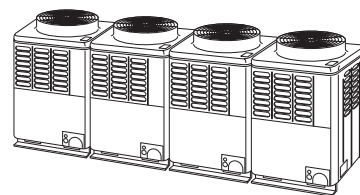

60Hz

Equivalent HP			Equivalent to 38HP				Equivalent to 40HP				
Set Model name	Heat Pump	MMY-	AP3801HT7				AP4001HT7				
Outdoor unit type			Inverter								
Outdoor unit model	Heat Pump	MMY-	MAP1001HT7	MAP1001HT7	MAP1001HT7	MAP0801HT7	MAP1001HT7	MAP1001HT7	MAP1001HT7	MAP1001HT7	
Rated cooling capacity (* 1)		(kW)	106.5				112.0				
Standard heating capacity (* 1)		(kW)	119.5				126.5				
Power supply (* 2)			3 phase 60Hz 380V								
Electrical characteristics (* 1)	Cooling	Running current (A)	48.05				51.18				
		Power consumption (kW)	30.36				32.34				
		Power factor (%)	96								
		EER (kW/kW) (Energy Efficiency Ratio)	3.51				3.46				
		Starting current (A)	1.0				1.0				
	Heating	Running current (A)	48.79				52.31				
		Power consumption (kW)	30.83				33.05				
		Power factor (%)	96								
		EER (kW/kW) (Energy Efficiency Ratio)	3.88				3.83				
		Starting current (A)	1.0				1.0				
External dimension (mm)			Height 1,800 x Width 990 x Depth 750								
Total weight (kg)			258	258	258	258	258	258	258		
Colour			Silky shade (Munsell 1Y8.5/0.5)								
Compressor	Type		Hermetic type								
	Motor output (kW)		3.1 x 2		2.3 x 2		3.1 x 2				
Fan unit	Fan		Propeller fan								
	Motor output (kW)		0.6								
	Air volume (m³/h)		10,500		9,900		10,500				
Heat exchanger			Finned tube								
Refrigerant R410A Charged amount (* 3) (kg)			12.5								
High-pressure switch (MPa)			OFF : 2.90 ON : 3.73								
Protective devices			(* 5)								
Refrigerant pipe spec. (* 4)	Connecting port dia.	Gas side (mm)	Ø 22.2								
		Liquid side (mm)	Ø 12.7								
		Balance side (mm)	Ø 9.5								
	Connecting method	Gas side		Brazing							
		Liquid side		Flare							
		Balance side		Flare							
	Max. equivalent length (m)		175								
	Max. real length (m)		150 (If the total bend length exceeds 150m, use the max equivalent length as the standard.)								
	Max. total pipe length (Real length) (m)		300								
	Max. height difference (m)		Outdoor unit is higher than indoor unit : 50 Outdoor unit is lower than indoor unit : 40 (* 6)								
Control wiring			Shield wire 1.25mm² x 2 cores. up to 2000m								
Central remote controller			When connecting to outdoor unit : (Shield wire) 1.25mm² x 2 cores. up to 1000m, and (Shield wire) 2.0mm² x 2 cores. up to 2000m								
Max. No. of connected indoor units			48								
Sound pressure level (dB(A))			64								

* 1 : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

The standard piping means that main pipe length is 5 m, branching pipe length 2.5 m of branch piping connected with a 0 meter height.

* 2 : The source voltage must not fluctuate more than ±10%.


* 3 : The amount does not consider extra piping lengths. Refrigerant must be added on site in accordance with the actual piping length.

* 4 : The maximum total piping length indicates the sum of one-way piping lengths on the liquid side or gas side.

System safety protection

* 5 : Discharge temp. sensor, Suction temp. sensor, Compressor case thermostat, High-pressure Switch, Over-current sensor, High-pressure Sensor, Low pressure sensor, Over-current relay.

* 6 : 30m when the height difference between indoor units exceeds 3m.

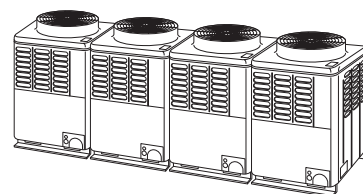
60Hz

Equivalent HP			Equivalent to 42HP				Equivalent to 44HP				
Set Model name		Heat Pump	MMY-	AP4201HT7				AP4401HT7			
Outdoor unit type			Inverter								
Outdoor unit model		Heat Pump	MMY-	MAP1201HT7	MAP1001HT7	MAP1001HT7	MAP1001HT7	MAP1201HT7	MAP1201HT7	MAP1001HT7	MAP1001HT7
Rated cooling capacity (* 1)			(kW)	118.0				123.5			
Standard heating capacity (* 1)			(kW)	132.0				138.0			
Power supply (* 2)			3 phase 60Hz 380V								
Electrical characteristics (* 1)	Cooling	Running current (A)	58.15				60.56				
		Power consumption (kW)	36.74				40.99				
		Power factor (%)	96				95				
		EER (kW/kW) (Energy Efficiency Ratio)	3.21				3.01				
		Starting current (A)	1.0				1.0				
	Heating	Running current (A)	56.20				59.75				
		Power consumption (kW)	35.14				37.36				
		Power factor (%)	95								
		EER (kW/kW) (Energy Efficiency Ratio)	3.76				3.69				
		Starting current (A)	1.0				1.0				
External dimension (mm)			Height 1,800 x Width 990 x Depth 750								
Total weight (kg)			258	258	258	258	258	258	258	258	
Colour			Silky shade (Munsell 1Y8.5/0.5)								
Compressor	Type		Hermetic type								
	Motor output (kW)		4.2 x 2	3.1 x 2			4.2 x 2		3.1 x 2		
Fan unit	Fan		Propeller fan								
	Motor output (kW)		0.6								
	Air volume (m³/h)		10,500								
Heat exchanger			Finned tube								
Refrigerant R410A Charged amount (*3) (kg)			12.5								
High-pressure switch (MPa)			OFF : 2.90 ON : 3.73								
Protective devices			(* 5)								
Refrigerant pipe spec. (* 4)	Connecting port dia.	Gas side (mm)	ø 28.6	ø 22.2			ø 28.6		ø 22.2		
		Liquid side (mm)	ø 12.7								
		Balance side (mm)	ø 9.5								
	Connecting method	Gas side	Brazing								
		Liquid side	Flare								
		Balance side	Flare								
	Max. equivalent length (m)		175								
	Max. real length (m)		150 (If the total bend length exceeds 150m, use the max equivalent length as the standard.)								
	Max. total pipe length (Real length) (m)		300								
	Max. height difference (m)		Outdoor unit is higher than indoor unit : 50								
Outdoor unit is lower than indoor unit : 40 (* 6)											
Control wiring			Shield wire 1.25mm² x 2 cores. up to 2000m								
Central remote controller			When connecting to outdoor unit : (Shield wire) 1.25mm² x 2 cores. up to 1000m, and (Shield wire) 2.0mm² x 2 cores. up to 2000m								
Max. No. of connected indoor units			48								
Sound pressure level (dB(A))			64.5								

*** 1 : Rated conditions** Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

The standard piping means that main pipe length is 5 m, branching pipe length 2.5 m of branch piping connected with a 0 meter height.

*** 2 :** The source voltage must not fluctuate more than ±10%.


*** 3 :** The amount does not consider extra piping lengths. Refrigerant must be added on site in accordance with the actual piping length.

*** 4 :** The maximum total piping length indicates the sum of one-way piping lengths on the liquid side or gas side.

System safety protection

*** 5 :** Discharge temp. sensor, Suction temp. sensor, Compressor case thermostat, High-pressure Switch, Over-current sensor, High-pressure Sensor, Low pressure sensor, Over-current relay.

*** 6 :** 30m when the height difference between indoor units exceeds 3m.

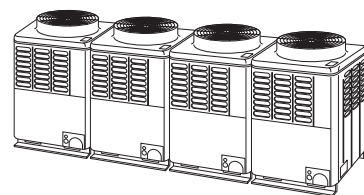

60Hz

Equivalent HP			Equivalent to 46HP				Equivalent to 48HP				
Set Model name	Heat Pump	MMY-	AP4601HT7				AP4801HT7				
Outdoor unit type			Inverter								
Outdoor unit model	Heat Pump	MMY-	MAP1201HT7	MAP1201HT7	MAP1201HT7	MAP1001HT7	MAP1201HT7	MAP1201HT7	MAP1201HT7	MAP1201HT7	
Rated cooling capacity (* 1)		(kW)	130.0				135.0				
Standard heating capacity (* 1)		(kW)	145				150.0				
Power supply (*2)			3 phase 60Hz 380V								
Electrical characteristics (* 1)	Cooling	Running current (A)	72.92				79.44				
		Power consumption (kW)	45.59				49.67				
		Power factor (%)	95								
		EER (kW/kW) (Energy Efficiency Ratio)	2.85				2.72				
		Starting current (A)	1.0				1.0				
	Heating	Running current (A)	63.73				67.56				
		Power consumption (kW)	39.85				41.80				
		Power factor (%)	95				94				
		EER (kW/kW) (Energy Efficiency Ratio)	3.64				3.59				
		Starting current (A)	1.0				1.0				
External dimension (mm)		Height 1,800 x Width 990 x Depth 750									
Total weight (kg)		258	258	258	258	258	258	258	258		
Colour			Silky shade (Munsell 1Y8.5/0.5)								
Compressor	Type		Hermetic type								
	Motor output (kW)		4.2 x 2			3.1 x 2	4.2 x 2				
Fan unit	Fan		Propeller fan								
	Motor output (kW)		0.6								
	Air volume (m³/h)		10,500								
Heat exchanger			Finned tube								
Refrigerant R410A Charged amount (*3)		(kg)	12.5								
High-pressure switch (MPa)		OFF : 2.90 ON : 3.73									
Protective devices			(* 5)								
Refrigerant pipe spec. (* 4)	Connecting port dia.	Gas side (mm)	Ø 28.6			Ø 22.2	Ø 28.6				
		Liquid side (mm)	Ø 12.7								
		Balance side (mm)	Ø 9.5								
	Connecting method	Gas side		Brazing							
		Liquid side		Flare							
		Balance side		Flare							
	Max. equivalent length (m)		160								
	Max. real length (m)		135 (If the total bend length exceeds 135m, use the max equivalent length as the standard.)								
	Max. total pipe length (Real length) (m)		300								
	Max. height difference (m)		Outdoor unit is higher than indoor unit : 50								
Outdoor unit is lower than indoor unit : 40 (* 6)											
Control wiring			Shield wire 1.25mm² x 2 cores. up to 2000m								
Central remote controller			When connecting to outdoor unit : (Shield wire) 1.25mm² x 2 cores. up to 1000m, and (Shield wire) 2.0mm² x 2 cores. up to 2000m								
Max. No. of connected indoor units			48								
Sound pressure level (dB(A))		65									

*1 : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB

The standard piping means that main pipe length is 5 m, branching pipe length 2.5 m of branch piping connected with a 0 meter height.

*2 : The source voltage must not fluctuate more than ±10%.

*3 : The amount does not consider extra piping lengths. Refrigerant must be added on site in accordance with the actual piping length.

*4 : The maximum total piping length indicates the sum of one-way piping lengths on the liquid side or gas side.

System safety protection

*5 : Discharge temp. sensor, Suction temp. sensor, Compressor case thermostat, High-pressure Switch, Over-current sensor, High-pressure Sensor, Low pressure sensor, Over-current relay.

*6 : 30m when the height difference between indoor units exceeds 3m.

Engineering Data

High Wall Type (2 Series)

Indoor Unit

MMK-AP0072H

MMK-AP0092H

MMK-AP0122H



1. Equipments
2. Technical Specifications
3. Dimensional Drawing
4. Wiring Diagram
5. Refrigerant Cycle Diagram
6. Sensible Capacity Table
7. Fan characteristics
8. Sound Characteristics (NC curve)
9. Wireless Remote controller

1. Equipment

1-1. Line up

Type	Appearance	Model Name	Capacity rank	Capacity code	Cooling Capacity (kW)	Heating Capacity (kW)
High Wall type (2 series)		MMK-AP0072H	007 type	0.8	2.2	2.5
		MMK-AP0092H	009 type	1.0	2.8	3.2
		MMK-AP0122H	012 type	1.25	3.6	4.0

1-2. Remote controller (Packed with the indoor unit)

Name	Model name	Appearance	Application	Function
Wireless remote controller	WH-H2UE			Start / Stop Changing mode Temperature setting Air flow changing (5 step) Clock Timer function - ON/OFF timer (10 min. step) - Daily timer High power mode ECO mode (Sleep timer with ECO-logic) One-touch pre-set memory One-touch Auto (*1)

(Note.1) Super MMS can not accept "AUTO" mode, Super HRM can accept "AUTO" mode.

1-3. Wiring Design

50Hz

Model	Nominal Voltage (V-Ph-Hz)	Voltage		Fan Motor		Power Supply	
		Min	Max	kW	FLA	MCA	MOCP
MMK-AP0072H	230-1-50	198	264	0.03	0.20	0.24	15
MMK-AP0092H	230-1-50	198	264	0.03	0.21	0.26	15
MMK-AP0122H	230-1-50	198	264	0.03	0.22	0.27	15

Legend MCA : Minimum Circuit Amps FLA : Full Load Amps
 MOCP : Maximum Overcurrent Protection (Amps) kW : Fan Motor Rated Output (kW)

1-4. Accessories

Accessory parts name	Model	Remarks
Wired remote controller	RBC-AMT31E	
Simple remote controller	RBC-AS21E2	
Wireless remote controller kit	TCB-AX21E2	with separated receiver unit
Central remote controller	TCB-SC642TLE2	Max. 64 group / unit
Weekly timer	RBC-EXW21E2	Use with RBC-AMT31E

2. Technical Specifications

■ High Wall type (2 Series)



50Hz

Model name		MMK-	AP0072H	AP0092H	AP0122H
Cooling / Heating capacity (Note 1)		(kW)	2.2 / 2.5	2.8 / 3.2	3.6 / 4.0
Electrical Characteristics	Power Supply	1 phase 50Hz 230V (220-240V) (Power exclusive for indoor is required.)			
	Running current (A)		0.17	0.18	0.19
	Power consumption (kW)		0.017	0.018	0.019
	Starting current (A)		0.22	0.23	0.24
Appearance	Suction grille and side panel	Moon white			
	Discharge grille	Moon white			
	Bottom surface	Moon white			
Outer dimension	Height x Width x Depth (mm)	275 x 790 x 208			
Total weight (kg)		11			
Heat exchanger		Finned tube			
Soundproof/Heat-insulating material		Non-flammable insulation			
Fan unit	Fan	Cross-flow fan			
	Standard air flow (High/Mid/Low)(m3/h)		480 / 420 / 360	510 / 450 / 360	540 / 450 / 360
	Motor	30			
Air filter		Standard filter attached (Simple filter)			
Controller (Note 3)		Wireless remote controller (WH-H2UE, Packed with indoor unit)			
Connecting pipe	Gas side (mm)	9.5			
	Liquid side (mm)	6.4			
	Drain port (Outer dia.)	16 (Polyvinyl chloride tube)			
Sound level (Note 2) (High / Mid / Low) (dB(A))			35-32-29	36-33-29	37-33-29

Note 1 : The cooling capacities and electrical characteristics are measured under the conditions specified by JIS B 8615 based on the reference piping. The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 meter height.


Note 2 : The sound level are measured in an anechoic chamber in accordance with JIS B8616.
Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note 3 : Wireless remote controller is packed with indoor unit.
Wired remote controller (RBC-AMT31E,RBC-AS21E2) can be also connected.


Note 4 : Rated conditions Cooling : Indoor air temperature 27 C DB/19 C WB,
Outdoor air temperature 35 C DB
Heating : Indoor air temperature 20C DB,
Outdoor air temperature 7C DB/6C WB

3. Dimensional Drawing

Model : MMK-AP0072H, AP0092H, AP0122H

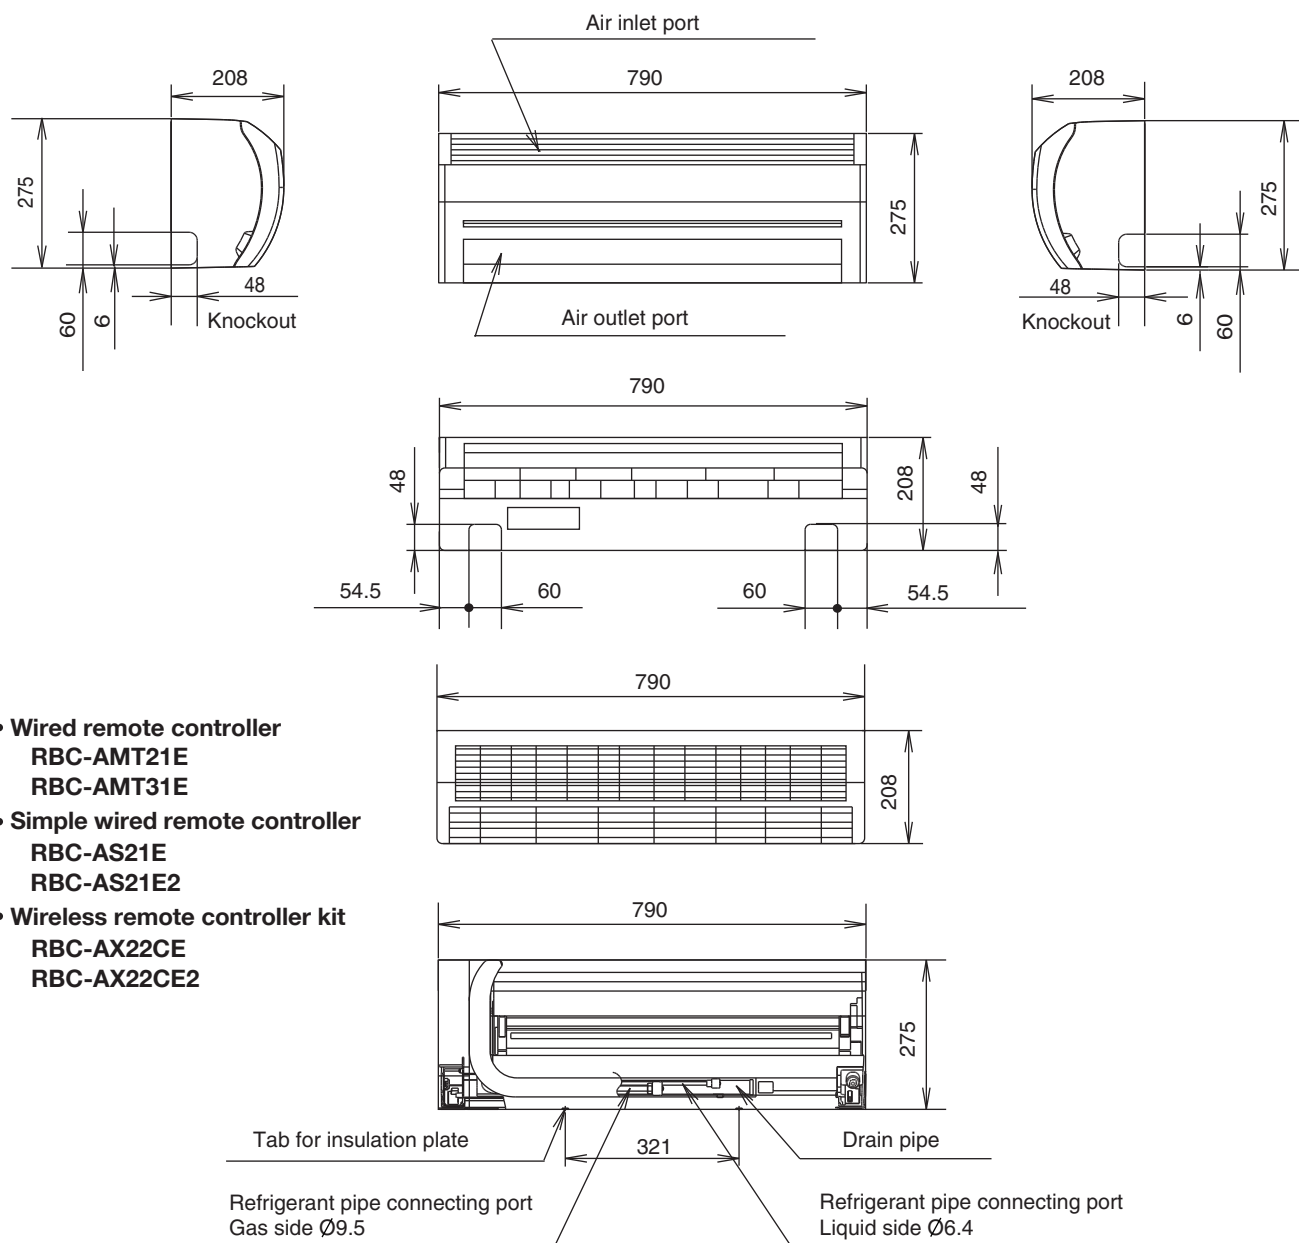


(Installation space)

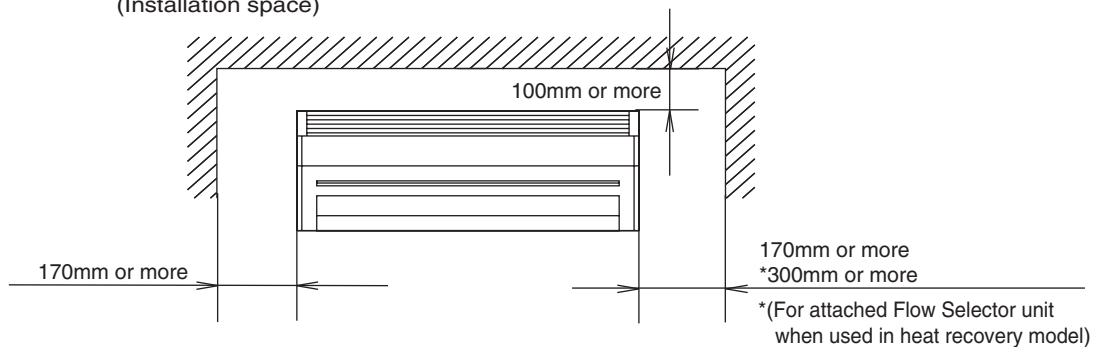

Note : All dimensions are in mm.


4. Wiring Diagram

Model : MMK-AP0072H, AP0092H, AP0122H

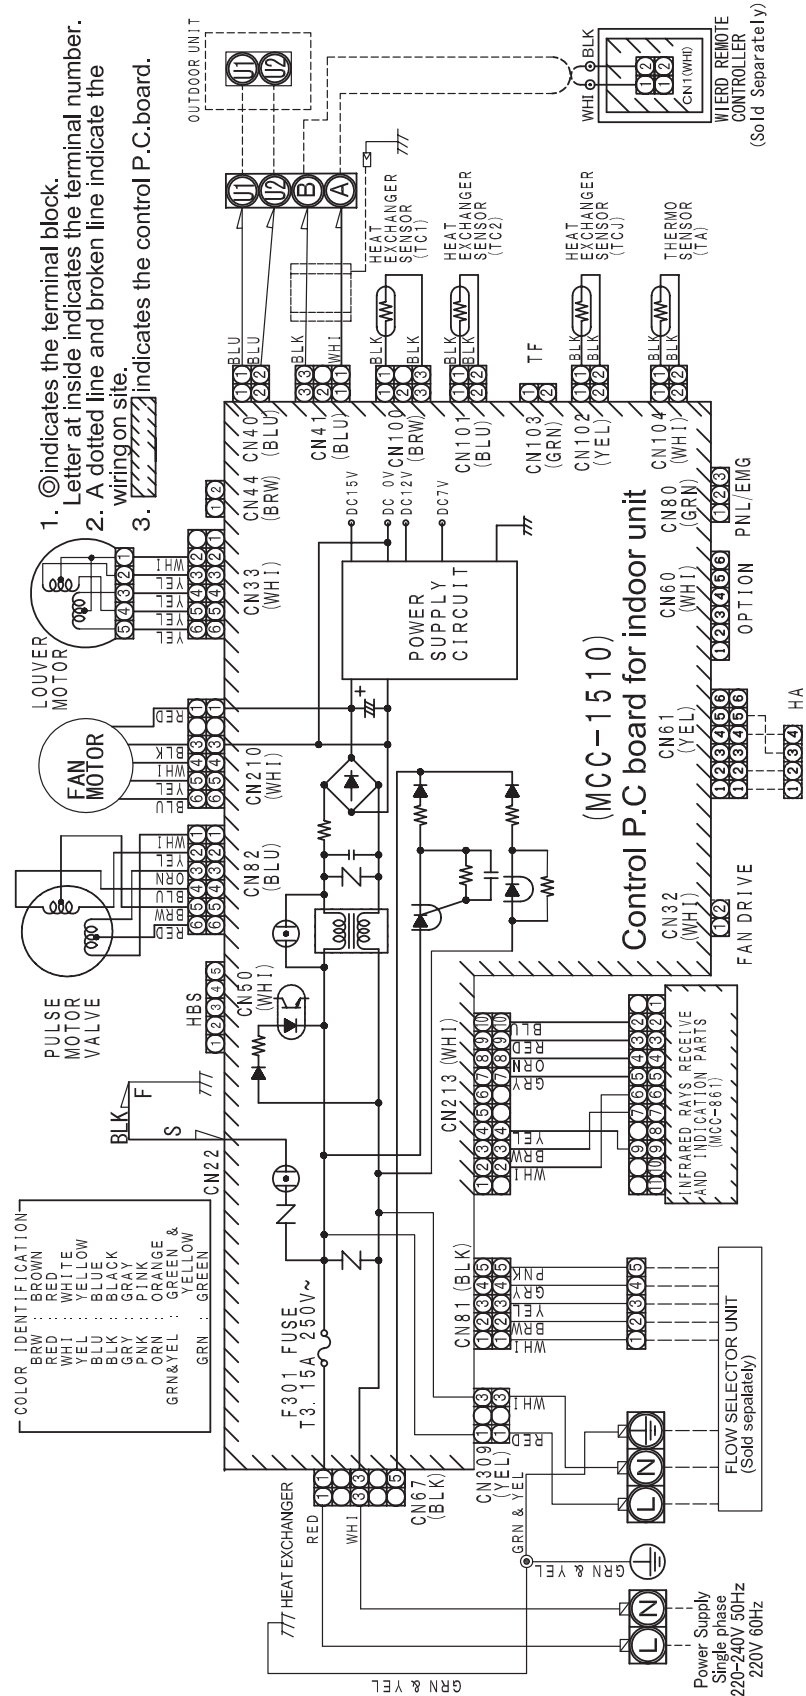

5. Refrigerant Cycle Diagram

Model : MMK-AP0072H, AP0092H, AP0122H

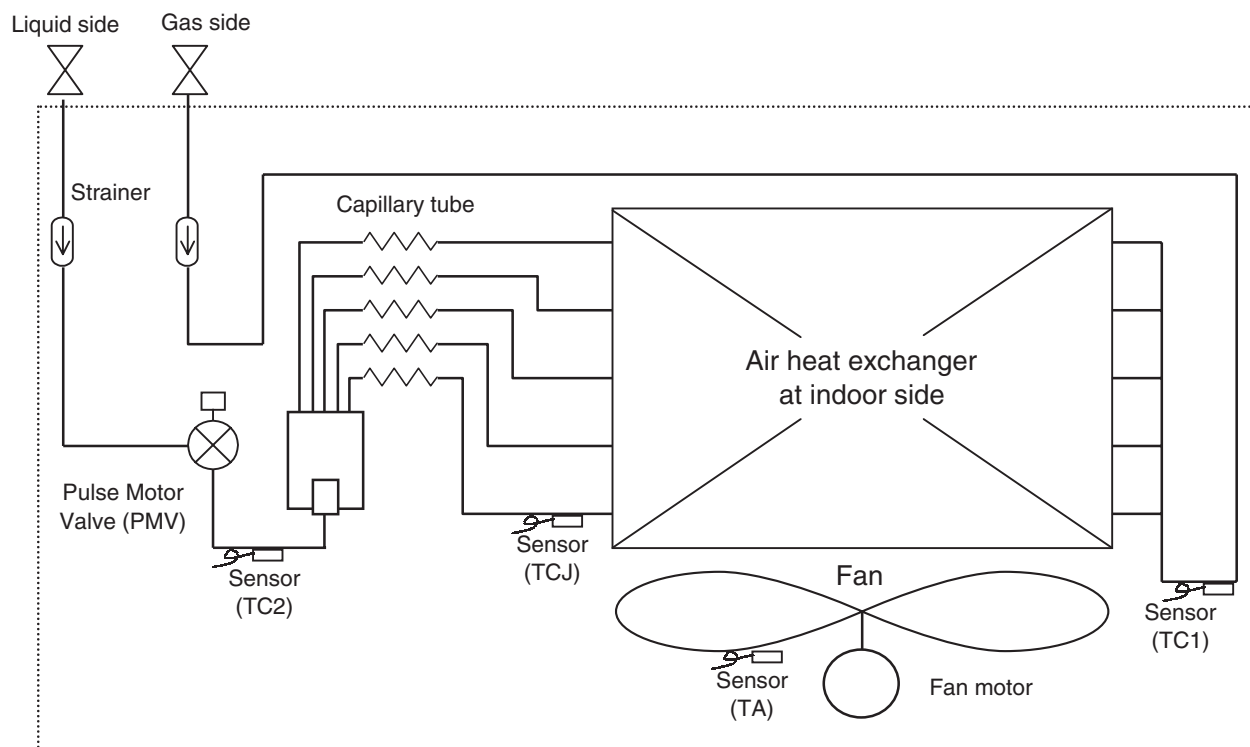

Functional part name		Functional outline
Pulse Motor Valve (PMV)	PMV	(Connector CN082 (6P): Blue) 1) Controls super heat in cooling operation 2) Controls under cool in heating operation 3) Recovers refrigerant oil in cooling operation 4) Recovers refrigerant oil in heating operation
Temp. sensor	1.TA	(Connector CN104 (2P): Yellow) 1) Detects indoor suction temperature
	2.TC1	(Connector CN100 (3P): Brown) 1) Controls PMV super heat in cooling operation
	3.TC2	(Connector CN101 (2P): Black) 1) Controls PMV under cool in heating operation
	4.TCJ	(Connector CN102 (2P): Red) 1) Controls PMV super heat in cooling operation

6. Sensible Capacity Table

■ High Wall Type (MMK-AP****2H) 2 series

TC: Total capacity [kW] SHC: Sensible capacity [kW]

unit size	outdoor air temp. CDB	Indoor Air Temp.													
		14.0CWB		16.0CWB		18.0CWB		19.0CWB		20.0CWB		22.0CWB		24.0CWB	
		20CDB		23CDB		26CDB		27CDB		28CDB		30CDB		32CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
007	10.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	12.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	14.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	16.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	18.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	20.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	21.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	23.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	25.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	27.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	29.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	31.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	33.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	35.0	1.8	1.5	2.0	1.6	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7	2.5	1.6
	37.0	1.7	1.5	1.9	1.6	2.1	1.7	2.1	1.6	2.2	1.6	2.3	1.6	2.4	1.6
	39.0	1.7	1.4	1.9	1.5	2.0	1.6	2.1	1.6	2.1	1.6	2.3	1.6	2.4	1.5
009	10.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	12.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	14.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	16.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	18.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	20.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	21.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	23.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	25.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	27.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	29.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	31.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	33.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	35.0	2.3	1.8	2.5	1.9	2.7	2.0	2.8	2.0	2.9	2.0	3.1	2.0	3.2	1.9
	37.0	2.2	1.7	2.5	1.8	2.6	1.9	2.7	1.9	2.8	1.9	3.0	1.9	3.1	1.9
	39.0	2.2	1.7	2.4	1.8	2.6	1.9	2.6	1.9	2.7	1.9	2.9	1.9	3.0	1.8
012	10.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	12.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	14.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	16.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	18.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	20.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	21.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	23.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	25.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	27.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	29.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	31.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	33.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	35.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	37.0	2.9	2.1	3.2	2.3	3.4	2.4	3.5	2.4	3.6	2.4	3.8	2.4	4.0	2.3
	39.0	2.8	2.1	3.1	2.2	3.3	2.4	3.4	2.4	3.5	2.4	3.7	2.3	3.9	2.3


7. Fan Characteristics

Discharge Air Speed and Air Throw

■ High Wall Type (2 series)

Model : MMK-AP0072H, AP0092H, AP0122H


Horizontal discharge Initial speed High wind : 4.5m/s
Med wind : 3.7m/s
Low wind : 3.2m/s

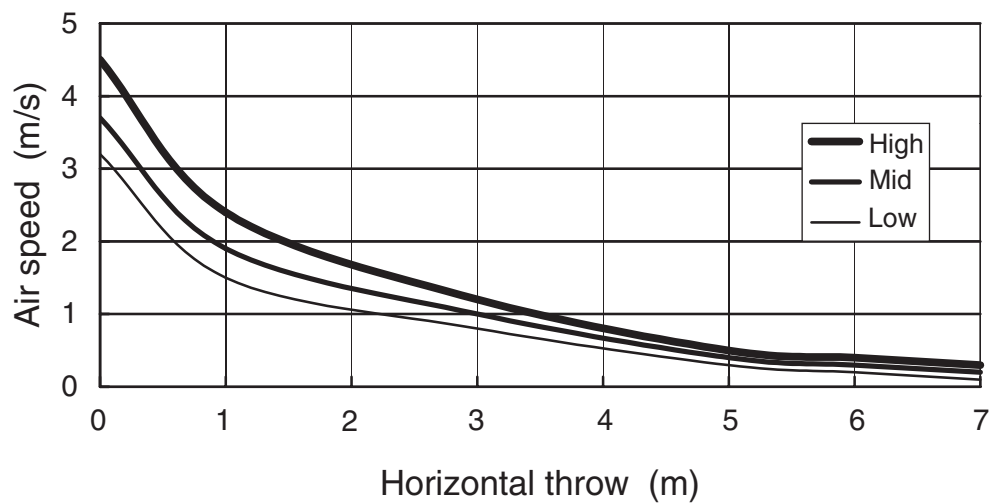

8. Sound Characteristics (NC curve)


■ High Wall Type (2 series)

Model : MMK-AP0072H, AP0092H, AP0122H

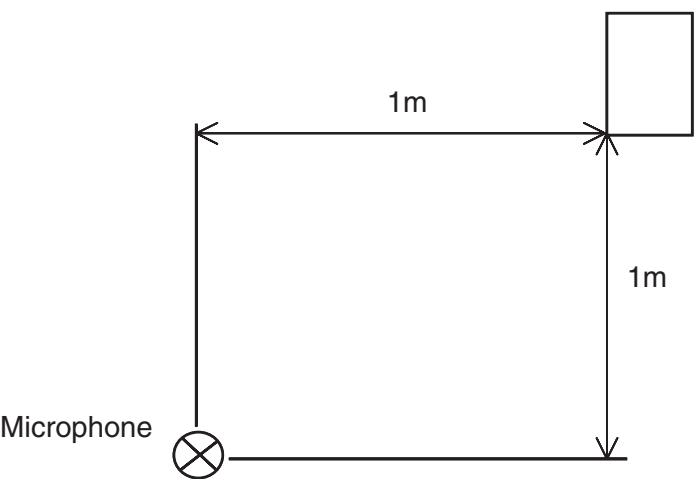


MMK-AP0072H

Fan tap	H	M	L
Sound pressure level (dB(A))	35	32	29

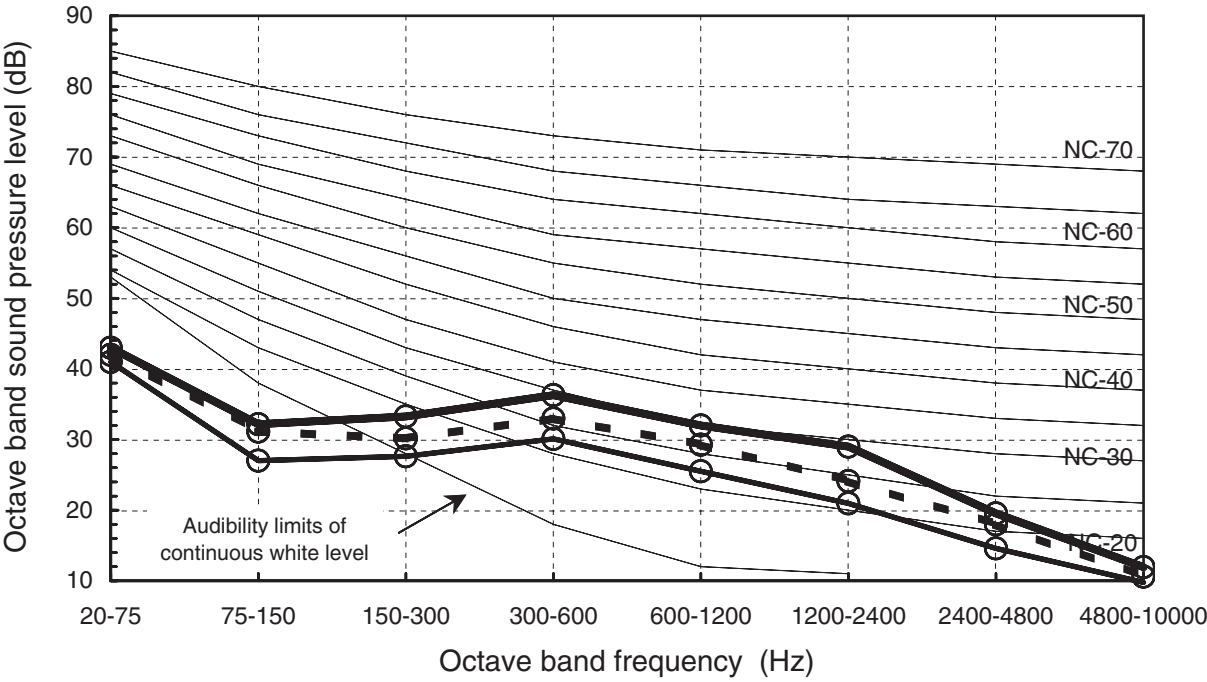


MMK-AP0092H

Fan tap	H	M	L
Sound pressure level (dB(A))	36	33	29

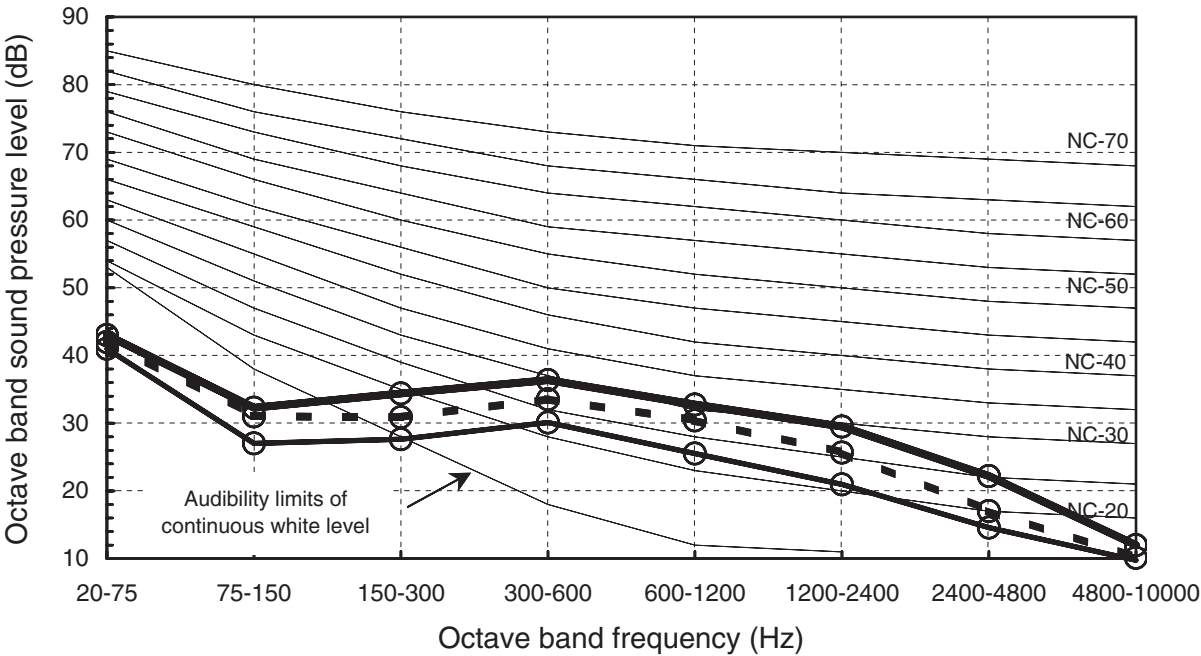


MMK-AP0122H

Fan tap	H	M	L
Sound pressure level (dB(A))	35	33	29

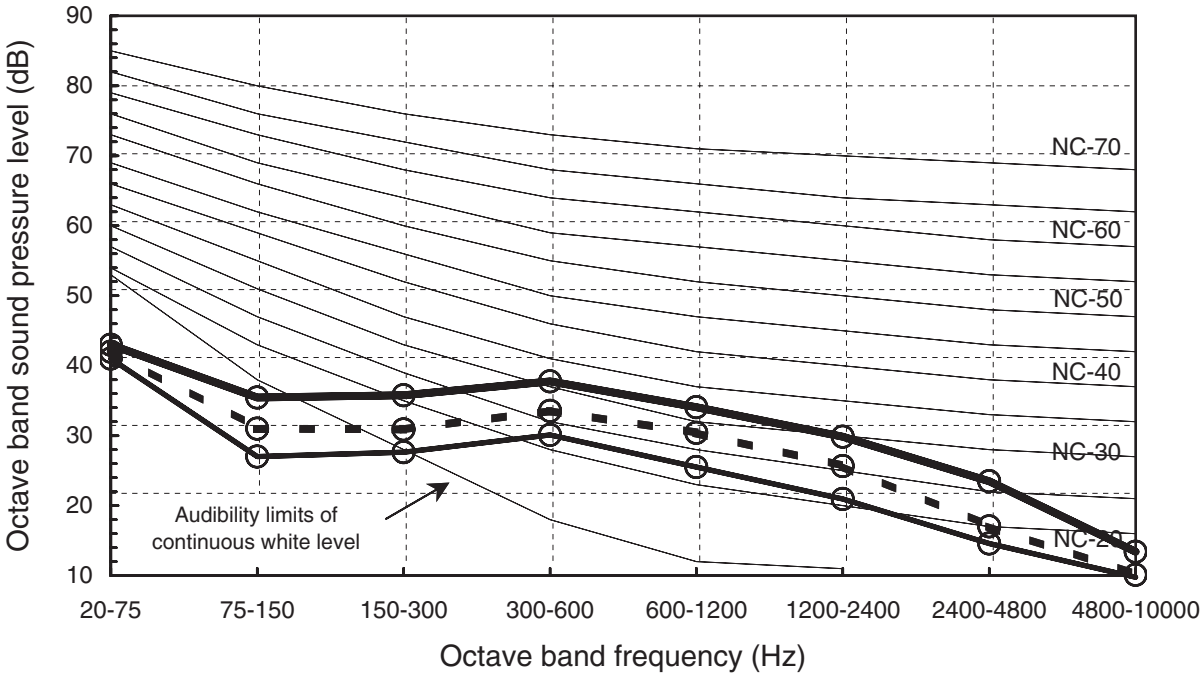

9. Wireless Remote controller

		High wall (1 series)		High Wall (2 series)		
		TCB-AX21E2(sold Separately)		WH-H2UE		
External View						
Function		Button	Contents	Button	Contents	Remarks
Start/Stop		Start/Stop	OK	START/STOP	OK	
Setting temp.	AUTO		17~27 °C		17~30 °C	
	COOL		18~30 °C		17~30 °C	
	DRY		18~30 °C		17~30 °C	
	HEAT		16~26 °C		17~30 °C	
Fahrenheit display		-	OK	-	-	No Fahrenheit display function
Air Volume Control			3-Speed, Auto	FAN	5-Speed, Auto	5-step control
Flap		Swing/Frap	OK	FIX	OK	
Swing				SWING	OK	
Operation select			Auto, Heat, Dry, Cool, Fan	MODE	Auto, Cool, Dry, Heat, Fan	No switch setting for cooling only
One-touch Auto		-	-	AUTO	One-touch Auto	One-touch auto (Auto mode, Setting temperature :22 °C, Air volume : Auto, Flap position : Auto, Swing : Off)
Preset mode		-	-	MEMO / PRESET	OK	Memorizing of setting contents for preset mode freely.
Clock		-	-	CLOCK	OK	
ON/OFF timer		SET	OFF timer, ON timer, Repeat timer, 30 minutes interval, max. 72 hours,	ON/OFF/SET	Clock display system, 10 minutes interval, max. 24 hours,	Available for ON / OFF working together
ECONO mode		-	-	ECO	OK	Sleep timer with ECO logic
Daily timer		-	-	ON/OFF/SET	OK	Setting both ON and OFF timer simultaneously and daily
Timer cancel		CL	OK		OK	-
High Power mode		-	-	Hi-POWER	OK	Automatic controls for quick cooling and heating
Filter reset		Filter reset	OK	FILTER	OK	-
Reset		Reset 	OK	RESET	OK	-
Sensor button		SENSOR	OK	-	-	No remote controller sensor

(Note)

- Automatic operation mode can not be accepted by heat pump system. If transmission is sent as auto mode, operation lamp and timer lamp of the indoor unit will light up with a beep as notification. In this case, change the other operation mode.
(Heat recovery system can accept automatic operation by using this wireless remote controller.)
- Group control using the wired remote controller (WH-H2UE) is not available. If it is incorrect action or display disagreement may occur.
- A wired remote controller is required for the group control. (sold separately.)
- When the wired remote controller is connected to this high wall unit, two remote control with the wireless remote controller (WH-H2UE) can be used. In this case, last-push priority control is performed.
- When the unit is controlled in a group through a wired control, ECO-Timer and Hi-POWER operation will not function.

Engineering Data

1-way (2 series) Air Discharge Cassette Type

Indoor Unit

MMU-AP0152SH

MMU-AP0182SH

MMU-AP0242SH



Contents

1. Specifications
2. Dimensions
3. Electrical current characteristics
4. Sensible capacity table
5. Wiring diagrams
6. Air speed characteristics
7. Sound characteristics (NC Curve)
8. Fresh air intake (Design guide)
9. Barycentric position

1. Specification

■ 1-way (2 series) Air Discharge Cassette Type

50Hz

Model name			MMU-	AP0152SH	AP0182SH	AP0242SH
Cooling/Heating capacity			(kW)	4.5/5.0	5.6/6.3	7.1/8.0
Electrical characteristics	Power supply		1 phase 50Hz 230V (220-240V)			
	Running current		(A)	0.34	0.37	0.62
	Power consumption		(kW)	0.042	0.046	0.075
	Starting current		(A)	0.51	0.54	0.80
Appearance	Main unit		Heat-insulating material attached Zinc hot dipping steel plate			
	Ceiling panel		RBC-US21PGE			
	Panel color		Moon white (Munsel 2.5GY9.0/0.5)			
Dimension	Main unit	Height	(mm)	200		
		Width	(mm)	1000		
		Depth	(mm)	710		
	Ceiling panel	Height	(mm)	20		
		Width	(mm)	1230		
		Depth	(mm)	800		
Total weight	Main unit		(kg)	21		22
	Ceiling panel		(kg)	5.5		
Heat exchanger			Finned tube			
Soundproof / Heat-insulating material			Polyethylene foam + Expanded polystyrene			
Fan			Centrifugal fan (Sirocco fan)			
Standard air flow	High		(m³/h)	750	780	1140
	(Mid./Low)		(m³/h)	690/630	720/660	960/810
Motor			(W)	30		
Air filter			Standard filter attached (Long life filter)			
Controller			Remote controller			
Connecting pipe	Gas pipe		(mm)	φ12.7		φ15.9
	Liquid pipe		(mm)	φ6.4		φ9.5
	Drain pipe		(Nominal dia.mm)	25 (Polyvinyl chloride tube : External dia.32 Internal dia.25)		
Sound pressure level	High/Mid./Low		(dB(A))	37/35/32	38/36/34	45/41/37

1. Specification


■ 1-way (2 series) Air Discharge Cassette Type

60Hz

Model name			MMU-	AP0152SH	AP0182SH	AP0242SH
Cooling/Heating capacity			(kW)	4.5/5.0	5.6/6.3	7.1/8.0
Electrical characteristics	Power supply		1 phase 60Hz 220V			
	Running current		(A)	0.35	0.39	0.62
	Power consumption		(kW)	0.041	0.045	0.073
	Starting current		(A)	0.53	0.54	0.80
Appearance	Main unit		Heat-insulating material attached Zinc hot dipping steel plate			
	Ceiling panel		RBC-US21PGE			
	Panel color		Moon white (Munsel 2.5GY9.0/0.5)			
Dimension	Main unit	Height	(mm)	200		
		Width	(mm)	1000		
		Depth	(mm)	710		
	Ceiling panel	Height	(mm)	20		
		Width	(mm)	1230		
		Depth	(mm)	800		
Total weight	Main unit		(kg)	21		22
	Ceiling panel		(kg)	5.5		
Heat exchanger			Finned tube			
Soundproof / Heat-insulating material			Polyethylene foam + Expanded polystyrene			
Fan			Centrifugal fan (Sirocco fan)			
Standard air flow	High		(m³/h)	750	780	1140
	(Mid./Low)		(m³/h)	690/630	720/660	960/810
Motor			(W)	30		
Air filter			Standard filter attached (Long life filter)			
Controller			Remote controller			
Connecting pipe	Gas pipe		(mm)	φ12.7		φ15.9
	Liquid pipe		(mm)	φ6.4		φ9.5
	Drain pipe		(Nominal dia.mm)	25 (Polyvinyl chloride tube : External dia.32 Internal dia.25)		
Sound pressure level	High/Mid./Low		(dB(A))	37/35/32	38/36/34	45/41/37

2. Dimensions

■ 1-way (2 series) Air Discharge Cassette Type (MMU-AP***SH)

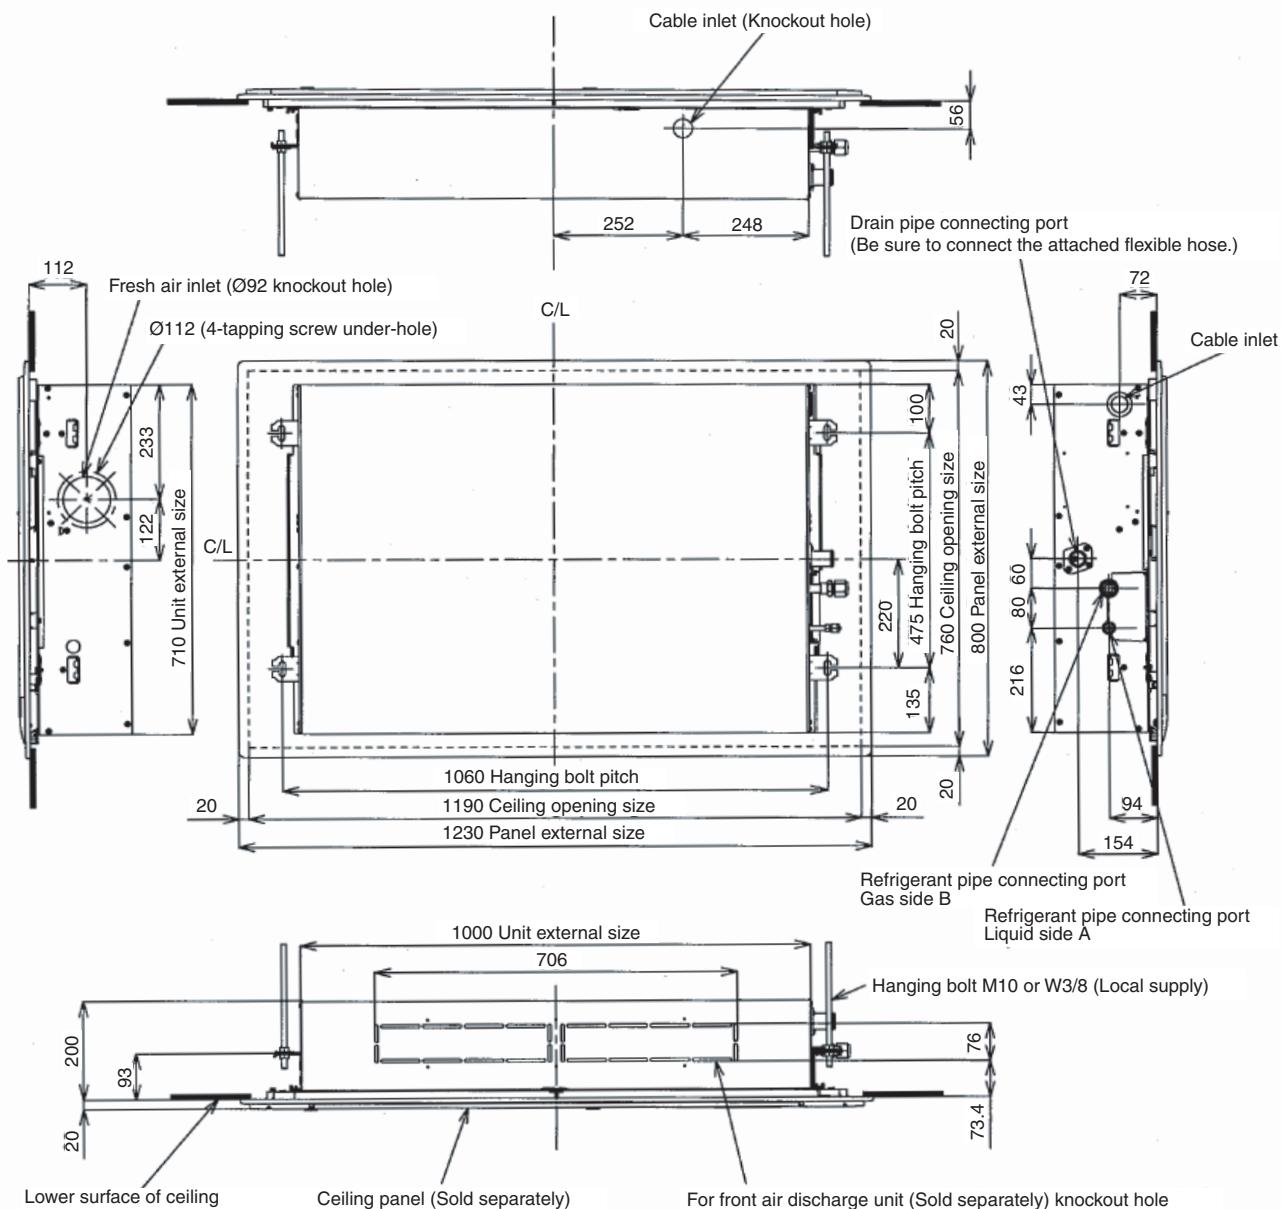

- **Wired remote controller**
RBC-AMT21E
RBC-AMT31E
- **Simple wired remote controller**
RBC-AS21E
RBC-AS21E2
- **Wireless remote controller kit**
TCB-AX21E
TCB-AX21E2
- **Weekly timer application**
RBC-AMT31E and RBC-EXW21E2

Model name	MMU-	A	B
AP015, AP018 type		Ø6.4	Ø12.7
AP024 type		Ø9.5	Ø15.9

3. Electrical current characteristics

■ 1-way (2 series) Air Discharge Cassette Type

Type	Model	Nominal Voltage (V-Ph-Hz)	Voltage Range		Fan Motor		Power Supply	
			Min	Max	kW	FLA	MCA	MOCP
S-MMS (50Hz)	MMU-AP0152SH	230-1-50	198	264	0.030	0.40	0.49	15
	MMU-AP0182SH	230-1-50	198	264	0.030	0.42	0.53	15
	MMU-AP0242SH	230-1-50	198	264	0.030	0.71	0.88	15
S-MMS (60Hz)	MMU-AP0152SH	220-1-60	198	264	0.030	0.40	0.50	15
	MMU-AP0182SH	220-1-60	198	264	0.030	0.45	0.57	15
	MMU-AP0242SH	220-1-60	198	264	0.030	0.75	0.94	15
S-HRM	MMU-AP0152SH	230-1-50	198	264	0.030	0.40	0.49	15
	MMU-AP0182SH	230-1-50	198	264	0.030	0.42	0.53	15
	MMU-AP0242SH	230-1-50	198	264	0.030	0.71	0.88	15

4. Sensible capacity table


■ 1-way (2 series) Air Discharge Cassette Type (MMU-AP***SH)

TC : Total capacity [kW] SHC : Sensible capacity [kW]

Unit size	Outdoor air temp. CDB	Indoor air temp.													
		14.0CWB		16.0CWB		18.0CWB		19.0CWB		20.0CWB		22.0CWB		24.0CWB	
		20CDB		23CDB		26CDB		27CDB		28CDB		30CDB		32CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
015	10.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	12.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	14.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	16.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	18.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	20.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	21.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	23.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	25.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	27.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	29.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	31.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	33.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	35.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	37.0	3.6	2.7	4.0	2.9	4.2	3.1	4.4	3.1	4.5	3.1	4.7	3.1	5.0	3.0
	39.0	3.5	2.7	3.8	2.8	4.1	3.0	4.2	3.0	4.4	3.0	4.6	3.0	4.8	2.9
018	10.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	12.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	14.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	16.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	18.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	20.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	21.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	23.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	25.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	27.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	29.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	31.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	33.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	35.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	37.0	4.5	3.3	4.9	3.6	5.3	3.8	5.4	3.8	5.6	3.8	5.9	3.7	6.2	3.7
	39.0	4.3	3.3	4.8	3.5	5.1	3.7	5.3	3.7	5.4	3.7	5.7	3.6	6.0	3.6
024	10.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	12.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	14.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	16.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	18.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	20.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	21.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	23.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	25.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	27.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	29.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	31.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	33.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	35.0	5.8	4.4	6.4	4.7	6.9	5.0	7.1	5.0	7.3	5.0	7.7	5.0	8.1	4.8
	37.0	5.6	4.3	6.2	4.6	6.7	4.9	6.9	4.8	7.1	4.8	7.5	4.8	7.8	4.7
	39.0	5.5	4.2	6.1	4.4	6.5	4.7	6.7	4.7	6.9	4.7	7.3	4.7	7.6	4.6

5. Wiring diagrams

■ 1-way (2 series) Air Discharge Cassette Type (MMU-AP***SH)

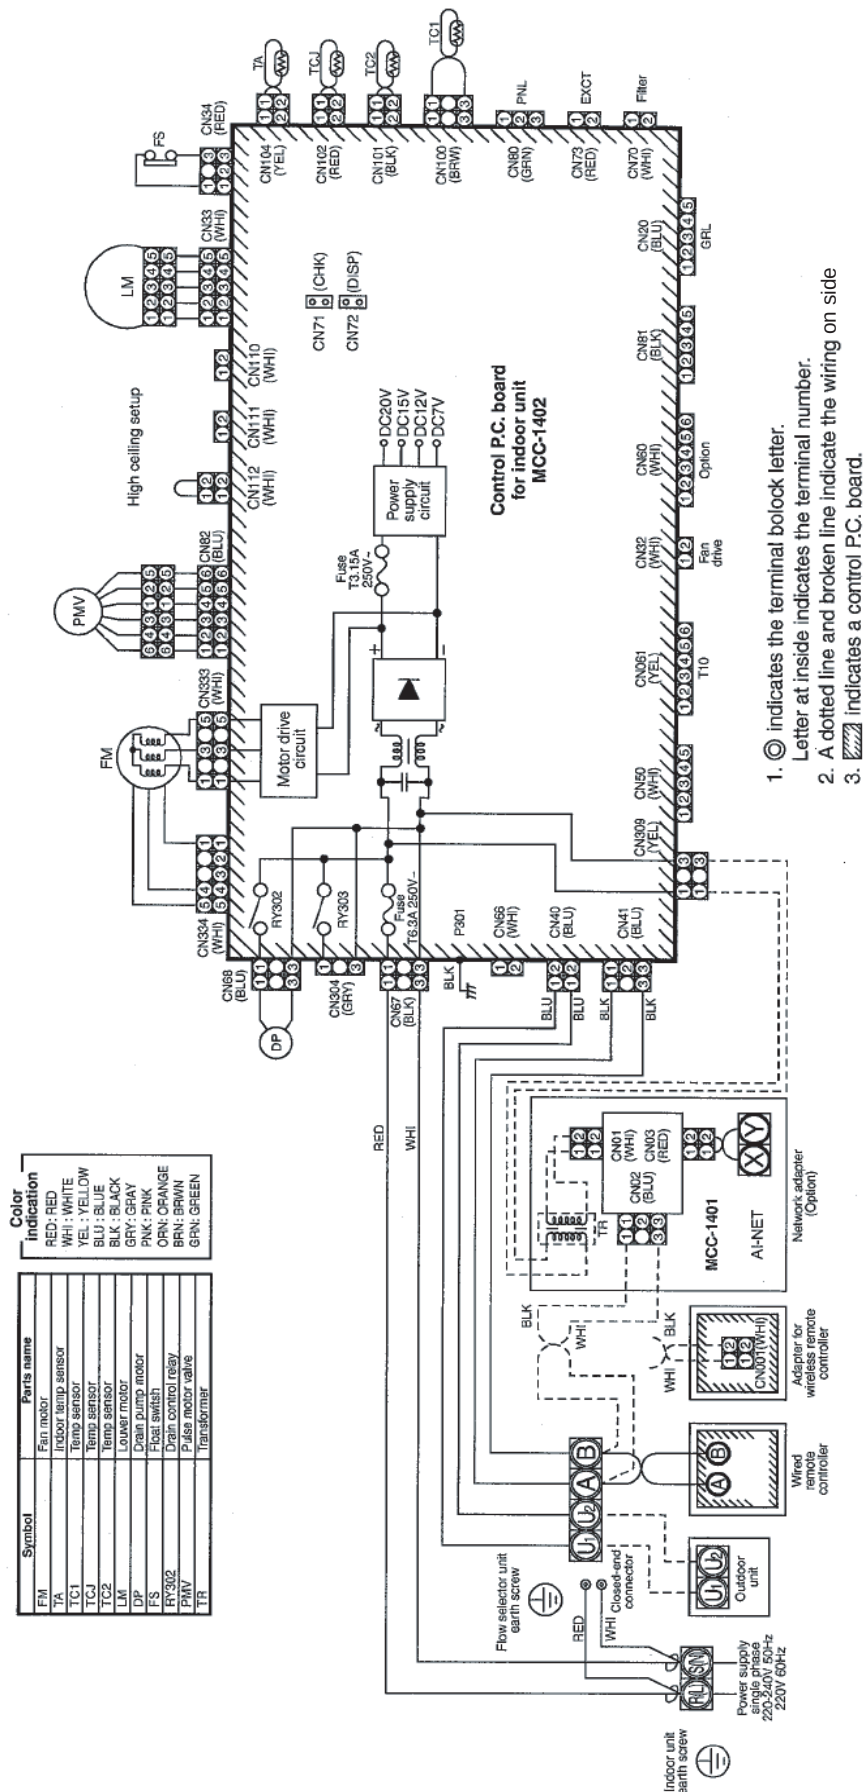


1. Ⓢ indicates the terminal block letter.
Letter at inside indicates the terminal number.
2. A dotted line and broken line indicate the wiring on side
3. ▨ indicates a control P.C. board.

6. Air speed characteristics


■ 1-way (2 series) Air Discharge Cassette Type

Heating mode

MMU-AP0152SH, AP0182SH

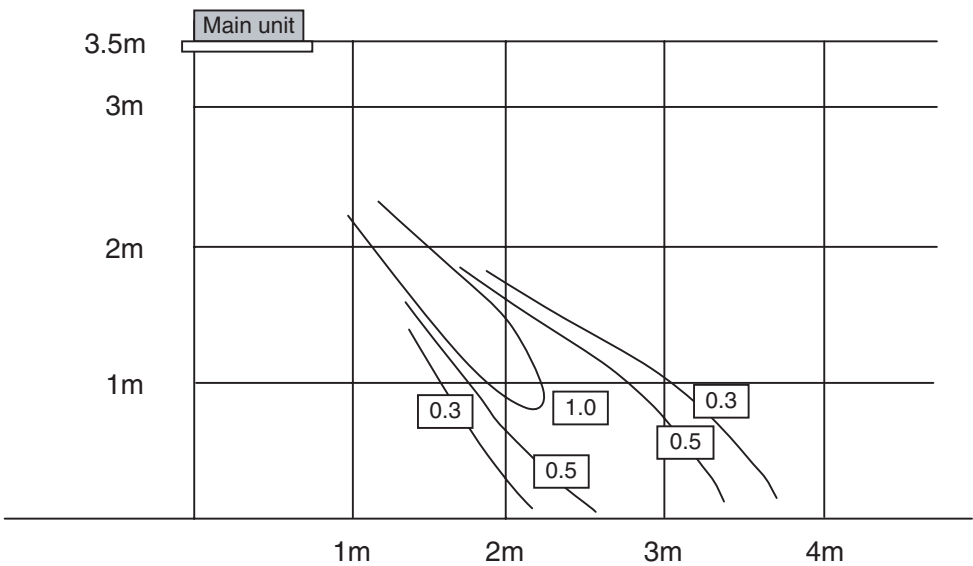

MMU-AP0242SH

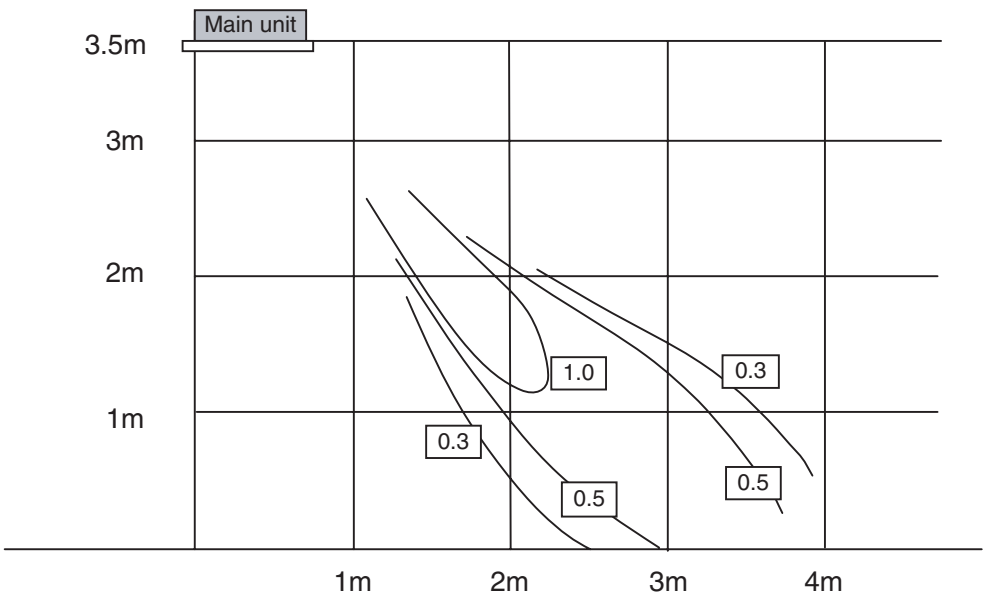


7. Sound Characteristics (NC Curve)

■ 1-way (2 series) Air Discharge Cassette Type


MMU-AP0152SH

Fan tap	H	M	L
Sound pressure level (dB(A))	37	35	32

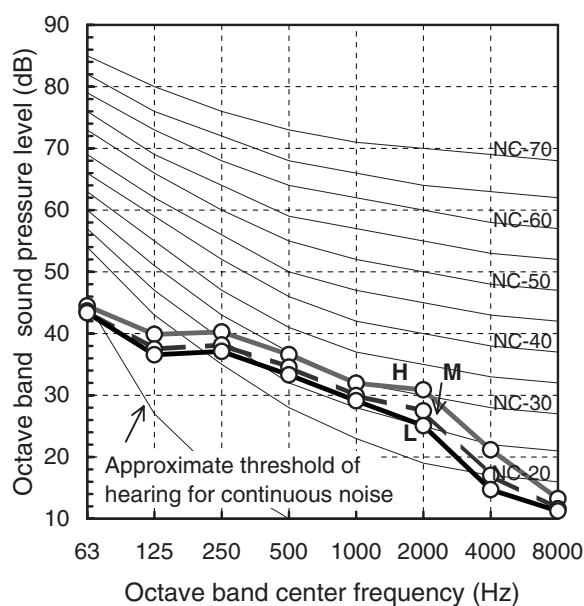



MMU-AP0242SH

Fan tap	H	M	L
Sound pressure level (dB(A))	45	41	37

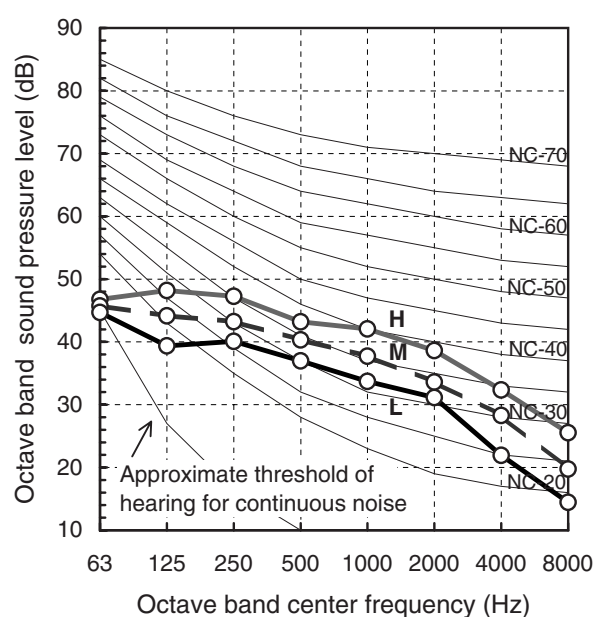

MMU-AP0182SH

Fan tap	H	M	L
Sound pressure level (dB(A))	38	36	34

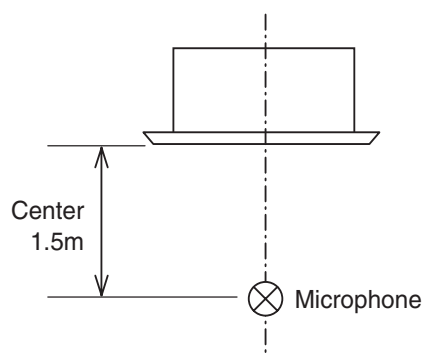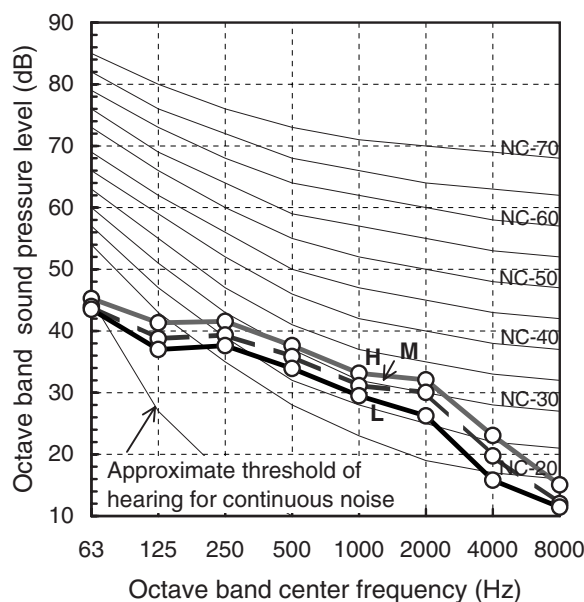

8. Fresh air intake (Design guide)

■ 1-way (2 series) Air Discharge Cassette Type

Caution

The fresh air shall be conditioned by a heat reclaim ventilator or similar.

Ensure the fresh air volume is determined so that mixed suction air and fresh air can maintain the operating temperature.

*1. Recommended conditioned air temperature is 12 °C to 30 °C.

However, Make a fresh air volume within 20% of standard.



Model name	MMU-	AP0152SH	AP0182SH	AP0242SH
Standard air flow	(m ³ /h)	750	780	1140

Install a filter within the fresh air duct.

(Fresh air does not pass through the filter of Indoor unit.)

Insulate the fresh air duct.

Electrically connect the fan of the Heat exchanger unit and the Indoor unit to a single isolator.

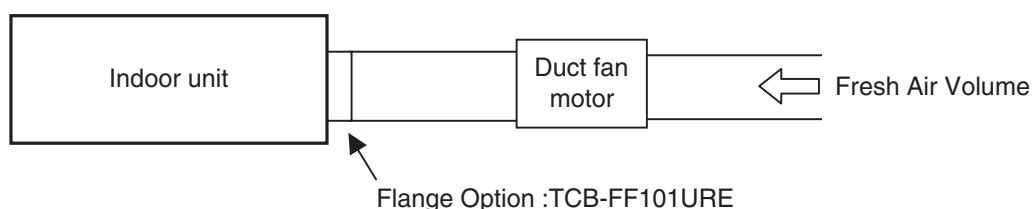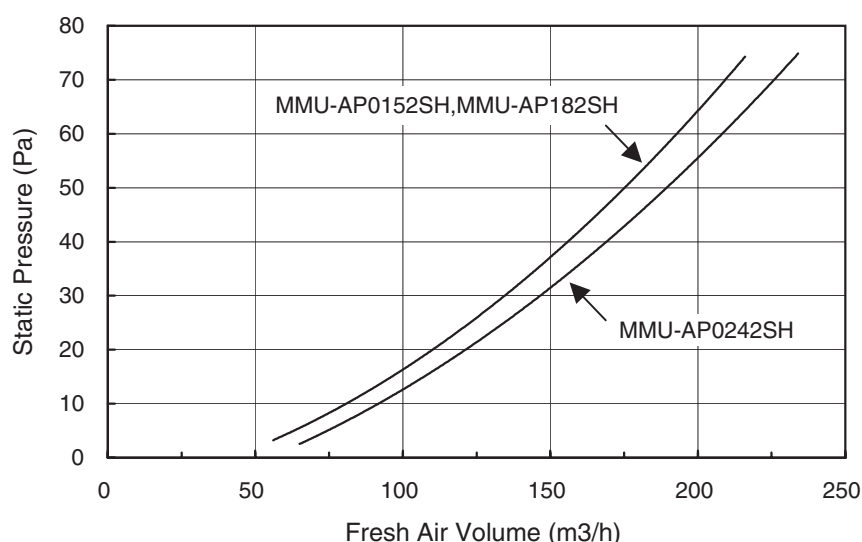

Inter - lock circuit

Connect the driving relay of the duct fan(DC 12V) between 1 and 6 on the indoor P.C. board.

(Rated current of the relay for duct fan should be up to 75mA.)


After installation, carry out a trial operation to check that the duct fan of the indoor unit start/stop simultaneously.

(Carry out the trial operation following the installation manual of the indoor unit.)

9. Units center of gravity

■ 1-way (2 series) Air Discharge Cassette Type

Model name	X (mm)	Y (mm)	Z (mm)	Weight (kg)	
				Main unit	Ceiling panel
MMU-AP0152SH	370	475	80	20	5.5
MMU-AP0182SH					
MMU-AP0242SH				21	5.5

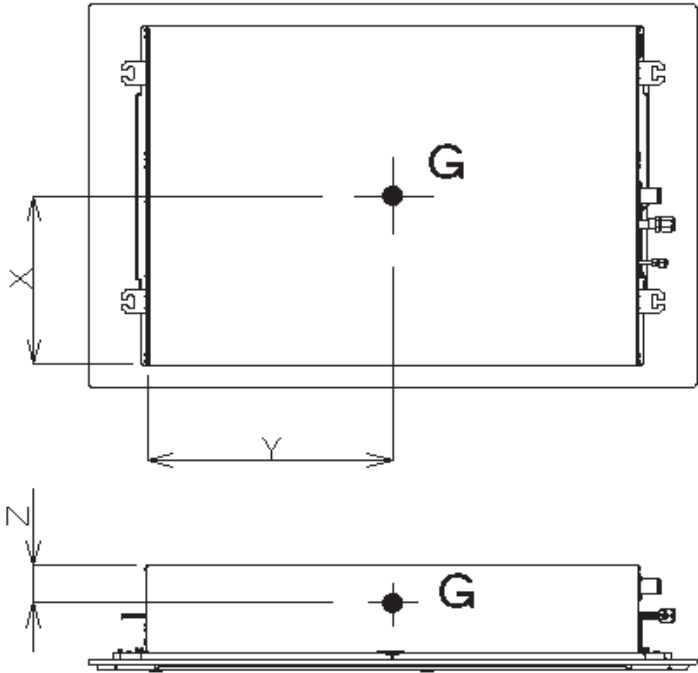

Engineering Data

Slim Duct Type

Indoor Unit

MMD-AP0071SPH

MMD-AP0091SPH

MMD-AP0121SPH

MMD-AP0151SPH

MMD-AP0181SPH

MMD-AP0071SPH (SH)-C

MMD-AP0091SPH (SH)-C

MMD-AP0121SPH (SH)-C

MMD-AP0151SPH (SH)-C

MMD-AP0181SPH (SH)-C

MMD-AP0071SPH-K

MMD-AP0091SPH-K

MMD-AP0121SPH-K

MMD-AP0151SPH-K

MMD-AP0181SPH-K



Contents

1. Specifications
2. Electrical current characteristics
3. Dimensions
4. Sensible capacity table
5. Wiring diagrams
6. Fan characteristics
7. Sound characteristics (NC Curve)
8. Fresh air intake (Design guide)

1. Specification

50Hz

Model name		MMD-	AP0071SPH	AP0091SPH	AP0121SPH	AP0151SPH	AP0181SPH
Cooling/Heating capacity		(kW)	2.2/2.5	2.8/3.2	3.6/4.0	4.5/5.0	5.6/6.3
Electrical characteristics	Power supply		1 phase 50Hz 230V (220-240V)				
	Running current (A)		0.29	0.29	0.31	0.32	0.39
	Power consumption (kW)		0.039	0.039	0.043	0.045	0.054
	Starting current (A)		0.51	0.51	0.54	0.56	0.68
Appearance			Zinc hot dipping steel plate				
Dimension	Height (mm)		210				
	Width (mm)		845				
	Depth (mm)		645				
Total weight (kg)			22	22	22	23	23
Heat exchanger			Finned tube				
Soundproof / Heat-insulating material			Polyethylene foam + Polyurethane foam				
Fan			Centrifugal fan (Sirocco fan)				
Standard air flow	High (m³/h)		540		600	690	780
	(Mid./Low) (m³/h)		470/400		520/450	600/520	680/580
Motor (W)			60				
External static pressure (Pa)			6 (Factory setting) -16-31-46 4steps		5 (Factory setting) -15-30-45 4steps		4 (Factory setting) -14-29-44 4steps
	Air filter pressure loss (Pa)		4		5		6
Controller			Remote controller				
Air filter			Standard filter supplied (Long life filter)				
Connecting pipe	Gas pipe (mm)		φ9.5			φ12.7	
	Liquid pipe (mm)		φ6.4				
	Drain pipe (Nominal dia.mm)		25 (Polyvinyl chloride tube : External dia.32 Internal dia.25)				
Sound pressure level High/Mid./Low	Under air inlet (dB(A))		36/33/30		38/35/32	39/36/33	40/38/36
	Back air inlet (dB(A))		28/26/24		29/27/25	32/30/28	33/31/29
Sound power level (dB(A))			51		53	54	55

* This sound pressure level is measured on the condition of Factory setting external static pressure.

* This sound pressure level are measured in an anechoic chamber in accordance with JIS B8616.

1. Specification

60Hz

Model name		MMD-	AP0071SPH	AP0091SPH	AP0121SPH	AP0151SPH	AP0181SPH
Cooling/Heating capacity		(kW)	2.2/2.5	2.8/3.2	3.6/4.0	4.5/5.0	5.6/6.3
Electrical characteristics	Power supply		1 phase 60Hz 220V				
	Running current (A)		0.27	0.27	0.30	0.31	0.37
	Power consumption (kW)		0.037	0.037	0.041	0.043	0.052
	Starting current (A)		0.47	0.47	0.53	0.54	0.65
Appearance			Zinc hot dipping steel plate				
Dimension	Height (mm)		210				
	Width (mm)		845				
	Depth (mm)		645				
Total weight		(kg)	22	22	22	23	23
Heat exchanger			Finned tube				
Soundproof / Heat-insulating material			Polyethylene foam + Polyurethane foam				
Fan			Centrifugal fan (Sirocco fan)				
Standard air flow	High	(m³/h)	540		600	690	780
	(Mid./Low)	(m³/h)	470/400		520/450	600/520	680/580
Motor		(W)	60				
External static pressure		(Pa)	6 (Factory setting) -16-31-46 4steps		5 (Factory setting) -15-30-45 4steps		4 (Factory setting) -14-29-44 4steps
	Air filter pressure loss (Pa)		4		5		6
Controller			Remote controller				
Air filter			Standard filter supplied (Long life filter)				
Connecting pipe	Gas pipe (mm)		φ9.5			φ12.7	
	Liquid pipe (mm)		φ6.4				
	Drain pipe (Nominal dia.mm)		25 (Polyvinyl chloride tube : External dia.32 Internal dia.25)				
Sound pressure level High/Mid./Low	Under air inlet (dB(A))		36/33/30		38/35/32	39/36/33	40/38/36
	Back air inlet (dB(A))		28/26/24		29/27/25	32/30/28	33/31/29
Sound power level		(dB(A))	51		53	54	55

* This sound pressure level is measured on the condition of Factory setting external static pressure.

* This sound pressure level are measured in an anechoic chamber in accordance with JIS B8616.

1. Specification

China Model

Model name		MMD-	AP0071SPH-C	AP0091SPH-C	AP0121SPH-C	AP0151SPH-C	AP0181SPH-C
Cooling/Heating capacity		(kW)	2.2/2.5	2.8/3.2	3.6/4.0	4.5/5.0	5.6/6.3
Electrical characteristics	Power supply		1 phase 50Hz 220V				
	Running current (A)		0.29	0.29	0.31	0.32	0.39
	Power consumption (kW)		0.039	0.039	0.043	0.045	0.054
	Starting current (A)		0.51	0.51	0.54	0.56	0.68
Appearance			Zinc hot dipping steel plate				
Dimension	Height (mm)		210				
	Width (mm)		845				
	Depth (mm)		645				
Total weight (kg)			22	22	22	23	23
Heat exchanger			Finned tube				
Soundproof / Heat-insulating material			Polyethylene foam + Polyurethane foam				
Fan			Centrifugal fan (Sirocco fan)				
Standard air flow	High	(m³/h)	540		600	690	780
	(Mid./Low)	(m³/h)	470/400		520/450	600/520	680/580
Motor (W)			60				
External static pressure (Pa)			10(factory setting)-20-35-50 4steps				
Controller			Remote controller				
Air filter			Field supply				
Connecting pipe	Gas pipe (mm)		φ9.5			φ12.7	
	Liquid pipe (mm)		φ6.4				
	Drain pipe (Nominal dia.mm)		25 (Polyvinyl chloride tube : External dia.32 Internal dia.25)				
Sound pressure level High/Mid./Low	Under air inlet (dB(A))		36/33/30		38/35/32	39/36/33	40/38/36
	Back air inlet (dB(A))		28/26/24		29/27/25	32/30/28	33/31/29

* This sound pressure level is measured on the condition of Factory setting external static pressure.

* This sound pressure level are measured in an anechoic chamber in accordance with JIS B8616.

1. Specification

China Model

Model name		MMD-	AP0071SH-C	P0091SH-C	AP0121SH-C	AP0151SH-C	AP0181SH-C
Cooling/Heating capacity		(kW)	2.2/2.5	2.8/3.2	3.6/4.0	4.5/5.0	5.6/6.3
Electrical characteristics	Power supply		1 phase 50Hz 220V				
	Running current (A)		0.26	0.26	0.27	0.28	0.35
	Power consumption (kW)		0.027	0.027	0.031	0.033	0.042
	Starting current (A)		0.46	0.46	0.47	0.49	0.61
Appearance			Zinc hot dipping steel plate				
Dimension	Height (mm)		210				
	Width (mm)		845				
	Depth (mm)		645				
Total weight		(kg)	22	22	22	23	23
Heat exchanger			Finned tube				
Soundproof / Heat-insulating material			Polyethylene foam + Polyurethane foam				
Fan			Centrifugal fan (Sirocco fan)				
Standard air flow	High	(m³/h)	540		600	690	780
	(Mid./Low)	(m³/h)	470/400		520/450	600/520	680/580
Motor		(W)	60				
External static pressure		(Pa)	10(factory setting)-20-35-50 4steps				
Controller			Remote controller				
Air filter			Field supply				
Connecting pipe	Gas pipe (mm)		φ9.5			φ12.7	
	Liquid pipe (mm)		φ6.4				
	Drain pipe (Nominal dia.mm)		20 (Polyvinyl chloride tube : External dia.26 Internal dia.20)				
Sound pressure level	Under air inlet	(dB(A))	36/33/30		38/35/32	39/36/33	40/38/36
High/Mid./Low	Back air inlet	(dB(A))	28/26/24		29/27/25	32/30/28	33/31/29

1. Specification

60Hz

Model name		MMD-	AP0071SPH-K	AP0091SPH-K	AP0121SPH-K	AP0151SPH-K	AP0181SPH-K
Cooling/Heating capacity		(kW)	2.2/2.5	2.8/3.2	3.6/4.0	4.5/5.0	5.6/6.3
Electrical characteristics	Power supply		1 phase 60Hz 220V				
	Running current (A)		0.27	0.27	0.30	0.31	0.37
	Power consumption (kW)		0.037	0.037	0.041	0.043	0.052
	Starting current (A)		0.47	0.47	0.53	0.54	0.65
Appearance			Zinc hot dipping steel plate				
Dimension	Height (mm)		210				
	Width (mm)		845				
	Depth (mm)		645				
Total weight (kg)			22	22	22	23	23
Heat exchanger			Finned tube				
Soundproof / Heat-insulating material			Polyethylene foam + Polyurethane foam				
Fan			Centrifugal fan (Sirocco fan)				
Standard air flow	High (m³/h)		540		600	690	780
	(Mid./Low) (m³/h)		470/400		520/450	600/520	680/580
Motor (W)			60				
External static pressure (Pa)			6 (Factory setting) -16-31-46 4steps		5 (Factory setting) -15-30-45 4steps		4 (Factory setting) -14-29-44 4steps
	Air filter pressure loss (Pa)		4		5		6
Controller			Remote controller				
Air filter			Standard filter supplied (Long life filter)				
Connecting pipe	Gas pipe (mm)		φ9.5			φ12.7	
	Liquid pipe (mm)		φ6.4				
	Drain pipe (Nominal dia.mm)		25 (Polyvinyl chloride tube : External dia.32 Internal dia.25)				
Sound pressure level High/Mid./Low	Under air inlet (dB(A))		36/33/30		38/35/32	39/36/33	40/38/36
	Back air inlet (dB(A))		28/26/24		29/27/25	32/30/28	33/31/29

* This sound pressure level is measured on the condition of Factory setting external static pressure.


* This sound pressure level are measured in an anechoic chamber in accordance with JIS B8616.

2. Electrical current characteristics

Type	Model	Nominal Voltage (V-Ph-Hz)	Voltage Range		Fan Motor		Power Supply	
			Min	Max	kW	FLA	MCA	MOCP
S-MMS (50Hz)	MMD-AP0071SPH	230-1-50	198	264	0.060	0.35	0.44	15
	MMD-AP0091SPH	230-1-50	198	264	0.060	0.35	0.44	15
	MMD-AP0121SPH	230-1-50	198	264	0.060	0.37	0.47	15
	MMD-AP0151SPH	230-1-50	198	264	0.060	0.38	0.48	15
	MMD-AP0181SPH	230-1-50	198	264	0.060	0.47	0.59	15
S-MMS (60Hz)	MMD-AP0071SPH	220-1-60	198	264	0.060	0.32	0.41	15
	MMD-AP0091SPH	220-1-60	198	264	0.060	0.32	0.41	15
	MMD-AP0121SPH	220-1-60	198	264	0.060	0.36	0.45	15
	MMD-AP0151SPH	220-1-60	198	264	0.060	0.37	0.47	15
	MMD-AP0181SPH	220-1-60	198	264	0.060	0.44	0.56	15
S-HRM	MMD-AP0071SPH	230-1-50	198	264	0.060	0.35	0.44	15
	MMD-AP0091SPH	230-1-50	198	264	0.060	0.35	0.44	15
	MMD-AP0121SPH	230-1-50	198	264	0.060	0.37	0.47	15
	MMD-AP0151SPH	230-1-50	198	264	0.060	0.38	0.48	15
	MMD-AP0181SPH	230-1-50	198	264	0.060	0.47	0.59	15


3. Dimensions

MMD-AP0071SPH(-K), AP0091SPH(-K), AP0121SPH(-K), AP0151SPH(-K), AP0181SPH(-K)

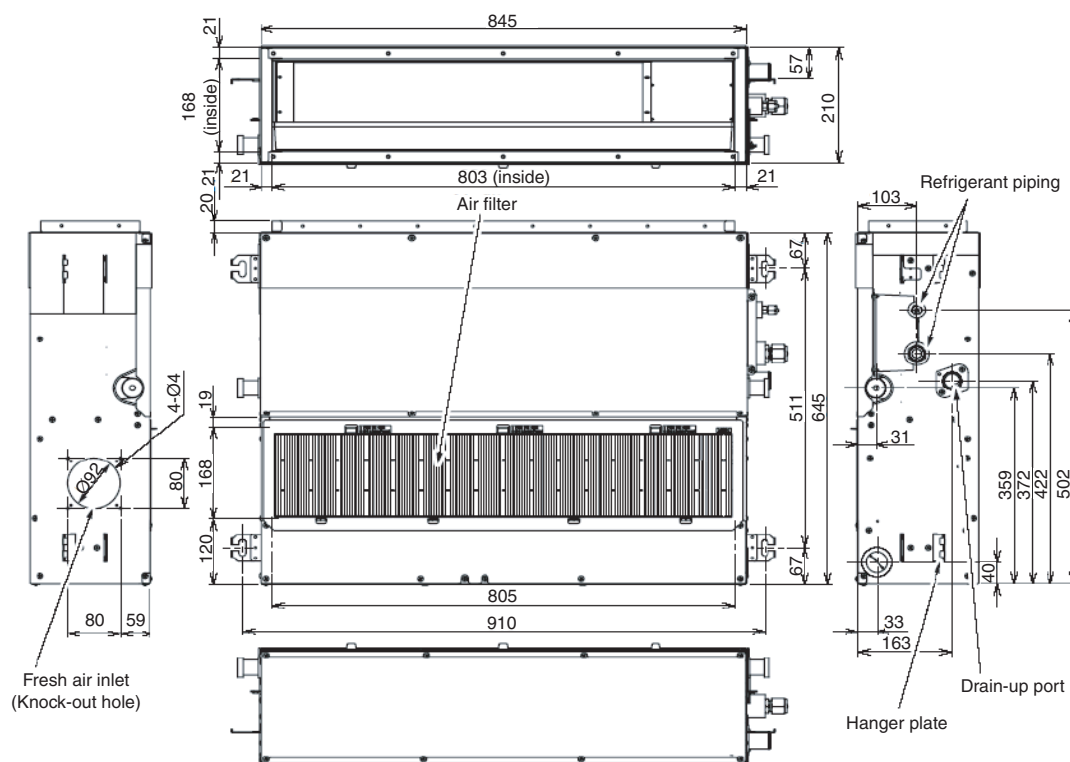


Air inlet connecting flange (Field supply)

Underside

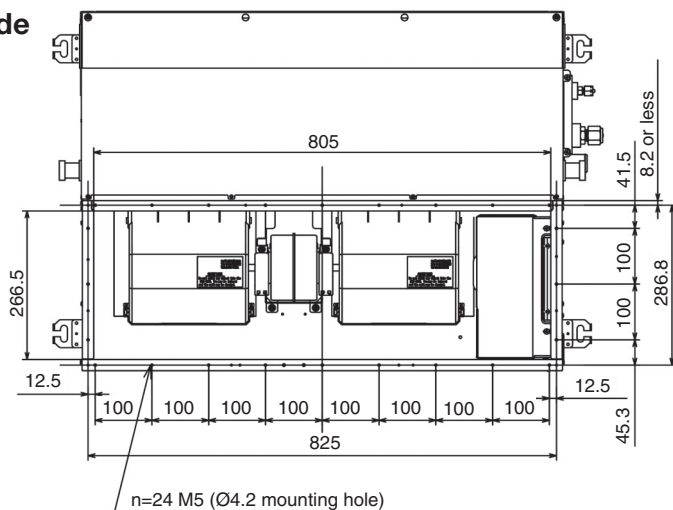

Rearside

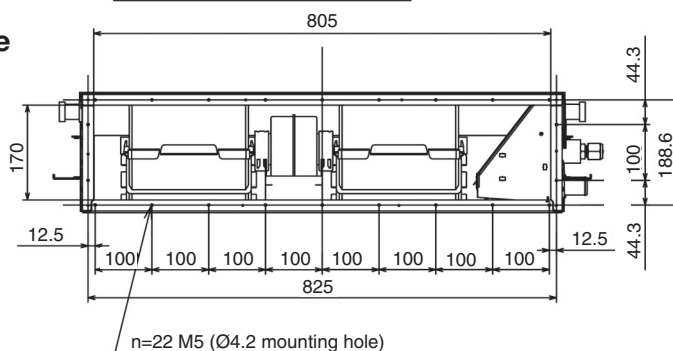


- **Wired remote controller**
RBC-AMT21E
RBC-AMT31E
- **Simple wired remote controller**
RBC-AS21E
RBC-AS21E2
- **Wireless remote controller kit**
TCB-AX21E
TCB-AX21E2
- **Weekly timer application**
RBC-AMT31E and RBC-EXW21E2


3. Dimensions

Installation space


(length:mm)

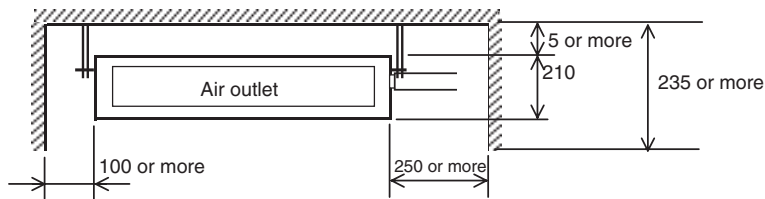

Under air inlet


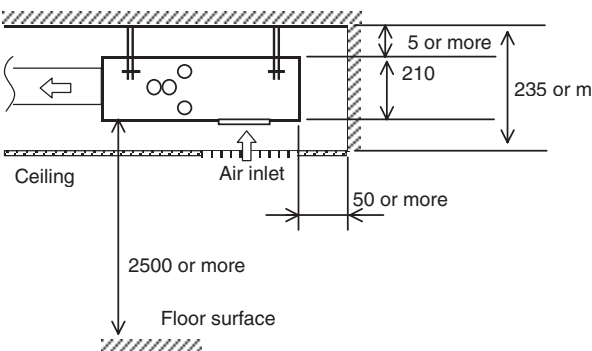


Rear air inlet


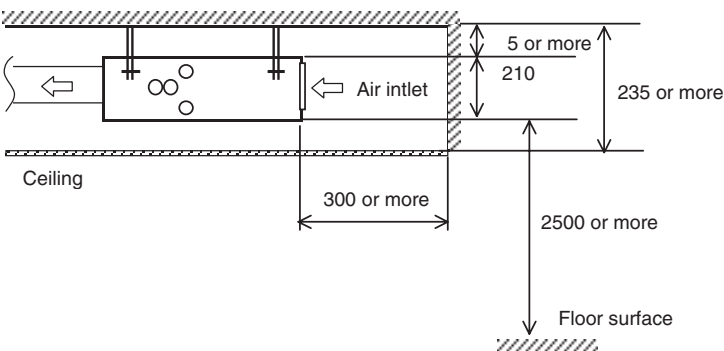


Service space



(length:mm)

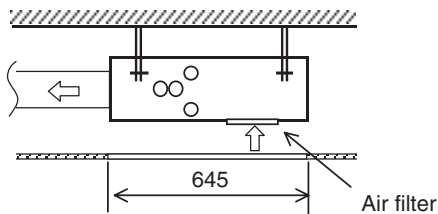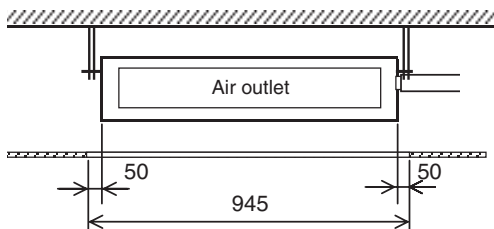

Service door (Ceiling opening)

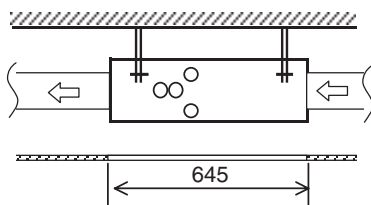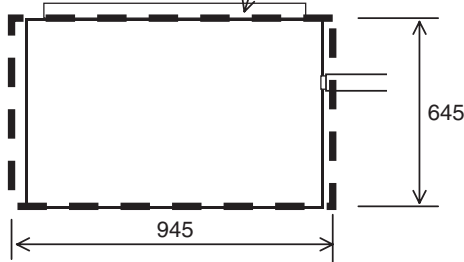


Service door (Ceiling opening)

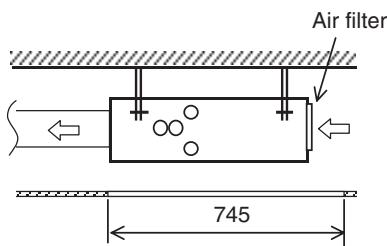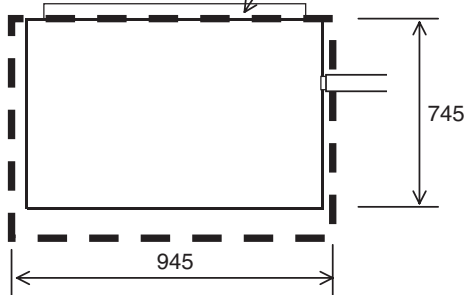


3. Dimensions

MMD-AP007SPH-C, AP0091SPH-C, AP0121SPH-C, AP0151SPH-C, AP0181SPH-C,
MMD-AP0071SH-C, AP0091SH-C, AP0121SH-C, AP0151SH-C, AP0181SH-C

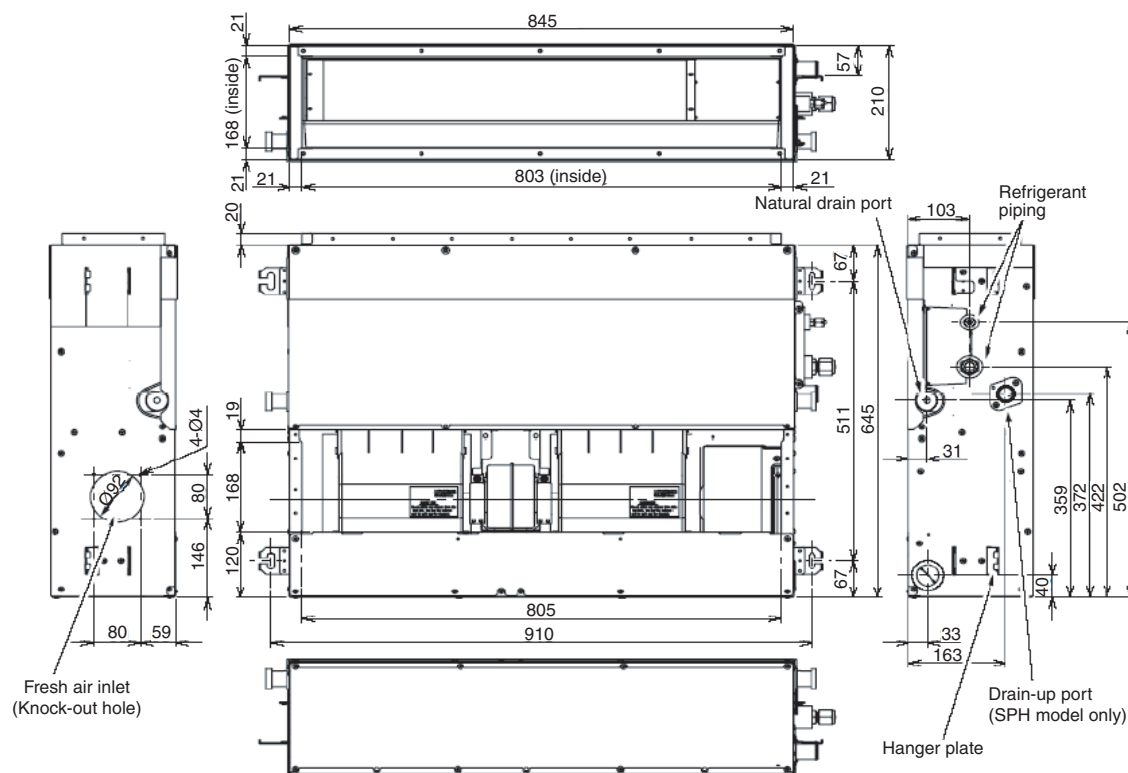


Air inlet connecting flange (Field supply)

Underside

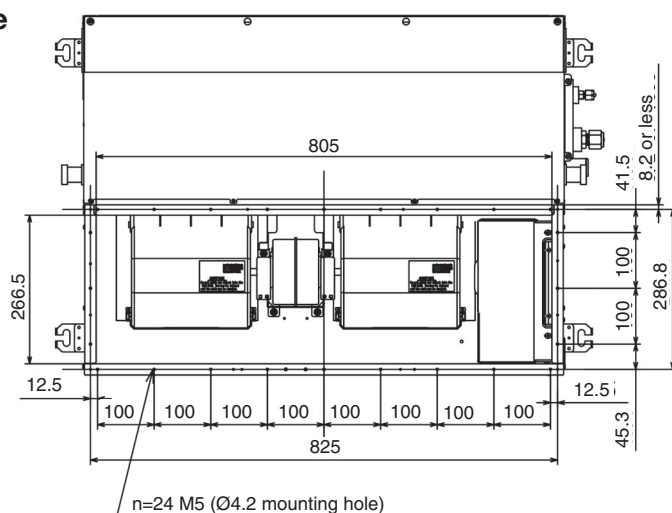

Rearside

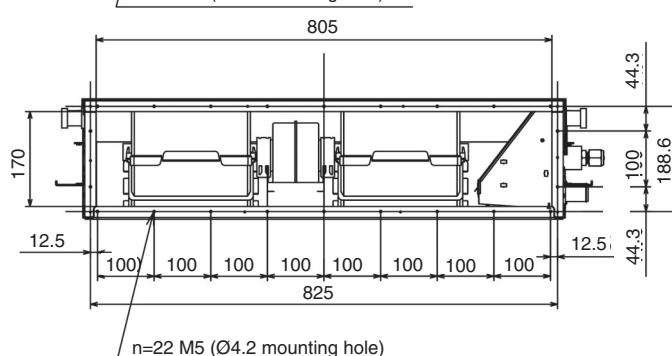


- **Wired remote controller**
RBC-AMT21E
RBC-AMT31E
- **Simple wired remote controller**
RBC-AS21E
RBC-AS21E2
- **Wireless remote controller kit**
TCB-AX21E
TCB-AX21E2
- **Weekly timer application**
RBC-AMT31E and RBC-EXW21E2

3. Dimensions

Installation space


(length:mm)

MMD-AP0071SPH-C, MMD-AP0091SPH-C, MMD-AP0121SPH-C, MMD-AP0151SPH-C, MMD-AP0181SPH-C

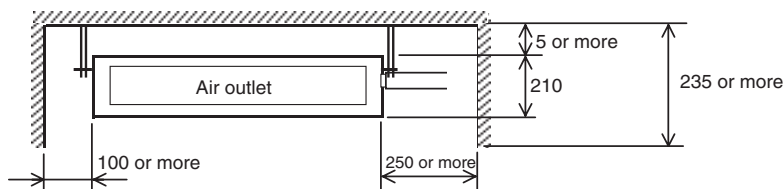


MMD-AP0071SH-C, MMD-AP0091SH-C, MMD-AP0121SH-C, MMD-AP0151SH-C, MMD-AP0181SH-C

Drain piping left side

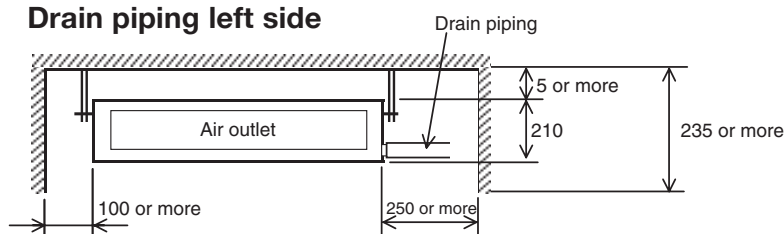


Drain piping right side

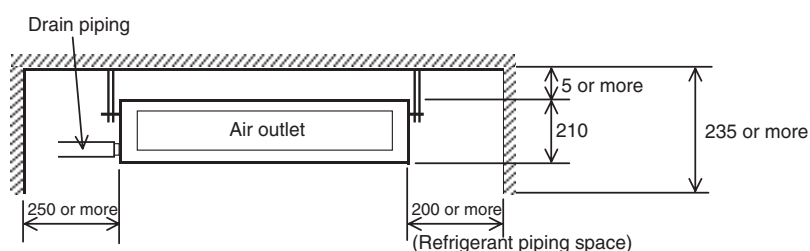


MMD-AP0071SPH-C, MMD-AP0091SPH-C, MMD-AP0121SPH-C, MMD-AP0151SPH-C, MMD-AP0181SPH-C
MMD-AP0071SH-C, MMD-AP0091SH-C, MMD-AP0121SH-C, MMD-AP0151SH-C, MMD-AP0181SH-C

Under air inlet

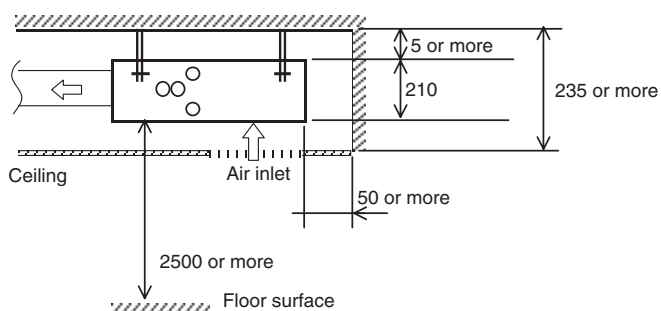

Rear air inlet

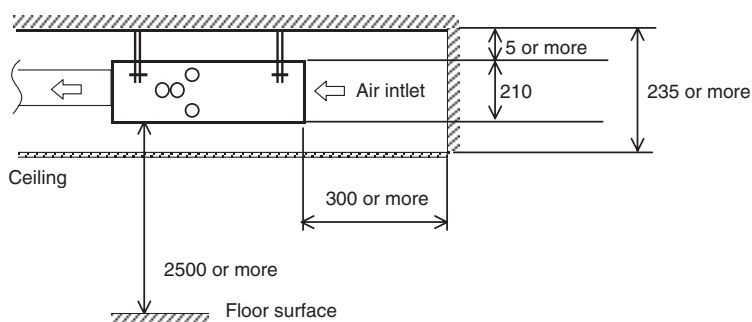


3. Dimensions

Service space


(length:mm)

MMD-AP0071SPH-C, MMD-AP0091SPH-C, MMD-AP0121SPH-C, MMD-AP0151SPH-C, MMD-AP0181SPH-C

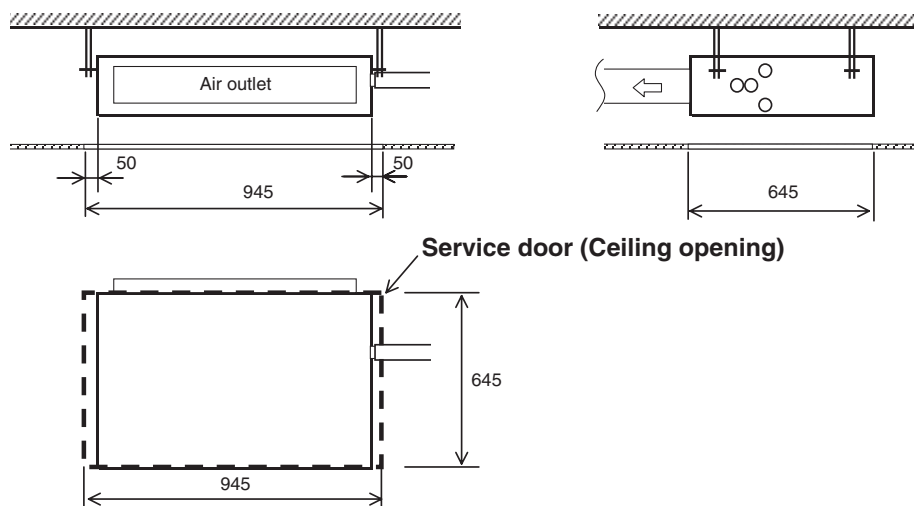


MMD-AP0071SH-C, MMD-AP0091SH-C, MMD-AP0121SH-C, MMD-AP0151SH-C, MMD-AP0181SH-C

Drain piping left side

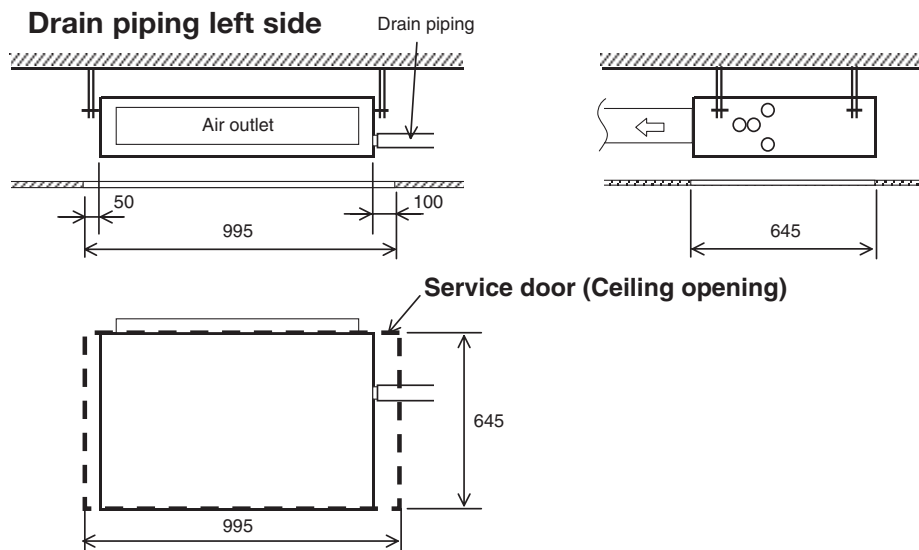

Drain piping right side

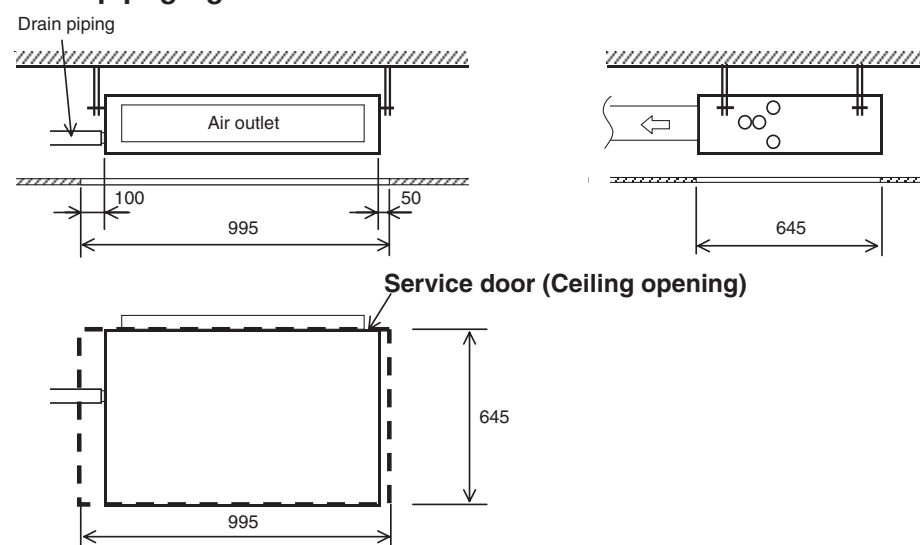

4. Sensible capacity table

■ Slim Duct Type (MMD-AP***SPH)

TC : Total capacity [kW] SHC : Sensible capacity [kW]

Unit size	Outdoor air temp. CDB	Indoor air temp.													
		14.0CWB		16.0CWB		18.0CWB		19.0CWB		20.0CWB		22.0CWB		24.0CWB	
		20CDB		23CDB		26CDB		27CDB		28CDB		30CDB		32CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
007	10.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	12.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	14.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	16.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	18.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	20.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	21.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	23.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	25.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	27.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	29.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	31.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	33.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	35.0	1.8	1.6	2.0	1.7	2.1	1.8	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
009	37.0	1.7	1.5	1.9	1.6	2.1	1.7	2.1	1.7	2.2	1.7	2.3	1.7	2.4	1.7
	39.0	1.7	1.5	1.9	1.6	2.0	1.7	2.1	1.7	2.1	1.7	2.3	1.7	2.4	1.6
	10.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	12.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	14.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	16.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	18.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	20.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	21.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	23.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	25.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	27.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	29.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	31.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
012	33.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	35.0	2.3	1.9	2.5	2.0	2.7	2.1	2.8	2.1	2.9	2.1	3.1	2.1	3.2	2.0
	37.0	2.2	1.8	2.5	1.9	2.6	2.0	2.7	2.0	2.8	2.0	3.0	2.0	3.1	2.0
	39.0	2.2	1.8	2.4	1.9	2.6	2.0	2.6	2.0	2.7	2.0	2.9	2.0	3.0	1.9
	10.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	12.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	14.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	16.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	18.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	20.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	21.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	23.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	25.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	27.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	29.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	31.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	33.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	35.0	3.0	2.2	3.3	2.4	3.5	2.5	3.6	2.5	3.7	2.5	3.9	2.5	4.1	2.4
	37.0	2.9	2.1	3.2	2.3	3.4	2.4	3.5	2.4	3.6	2.4	3.8	2.4	4.0	2.3
	39.0	2.8	2.1	3.1	2.2	3.3	2.4	3.4	2.4	3.5	2.4	3.7	2.3	3.9	2.3

4. Sensible capacity table


■ Slim Duct Type (MMD-AP***SPH)

TC : Total capacity [kW] SHC : Sensible capacity [kW]

Unit size	Outdoor air temp. CDB	Indoor air temp.													
		14.0CWB		16.0CWB		18.0CWB		19.0CWB		20.0CWB		22.0CWB		24.0CWB	
		20CDB		23CDB		26CDB		27CDB		28CDB		30CDB		32CDB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
015	10.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	12.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	14.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	16.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	18.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	20.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	21.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	23.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	25.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	27.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	29.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	31.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	33.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	35.0	3.7	2.8	4.1	3.0	4.4	3.2	4.5	3.2	4.6	3.2	4.9	3.2	5.1	3.1
	37.0	3.6	2.7	4.0	2.9	4.2	3.1	4.4	3.1	4.5	3.1	4.7	3.1	5.0	3.0
	39.0	3.5	2.7	3.8	2.8	4.1	3.0	4.2	3.0	4.4	3.0	4.6	3.0	4.8	2.9
018	10.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	12.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	14.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	16.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	18.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	20.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	21.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	23.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	25.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	27.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	29.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	31.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	33.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	35.0	4.6	3.5	5.1	3.7	5.4	3.9	5.6	3.9	5.8	3.9	6.1	3.9	6.4	3.8
	37.0	4.5	3.3	4.9	3.6	5.3	3.8	5.4	3.8	5.6	3.8	5.9	3.7	6.2	3.7
	39.0	4.3	3.3	4.8	3.5	5.1	3.7	5.3	3.7	5.4	3.7	5.7	3.6	6.0	3.6


5. Wiring diagrams

MMD-AP0071SPH(SH), AP0091SPH(SH), AP0121SPH(SH), AP0151SPH(SH), AP0181SPH(SH)

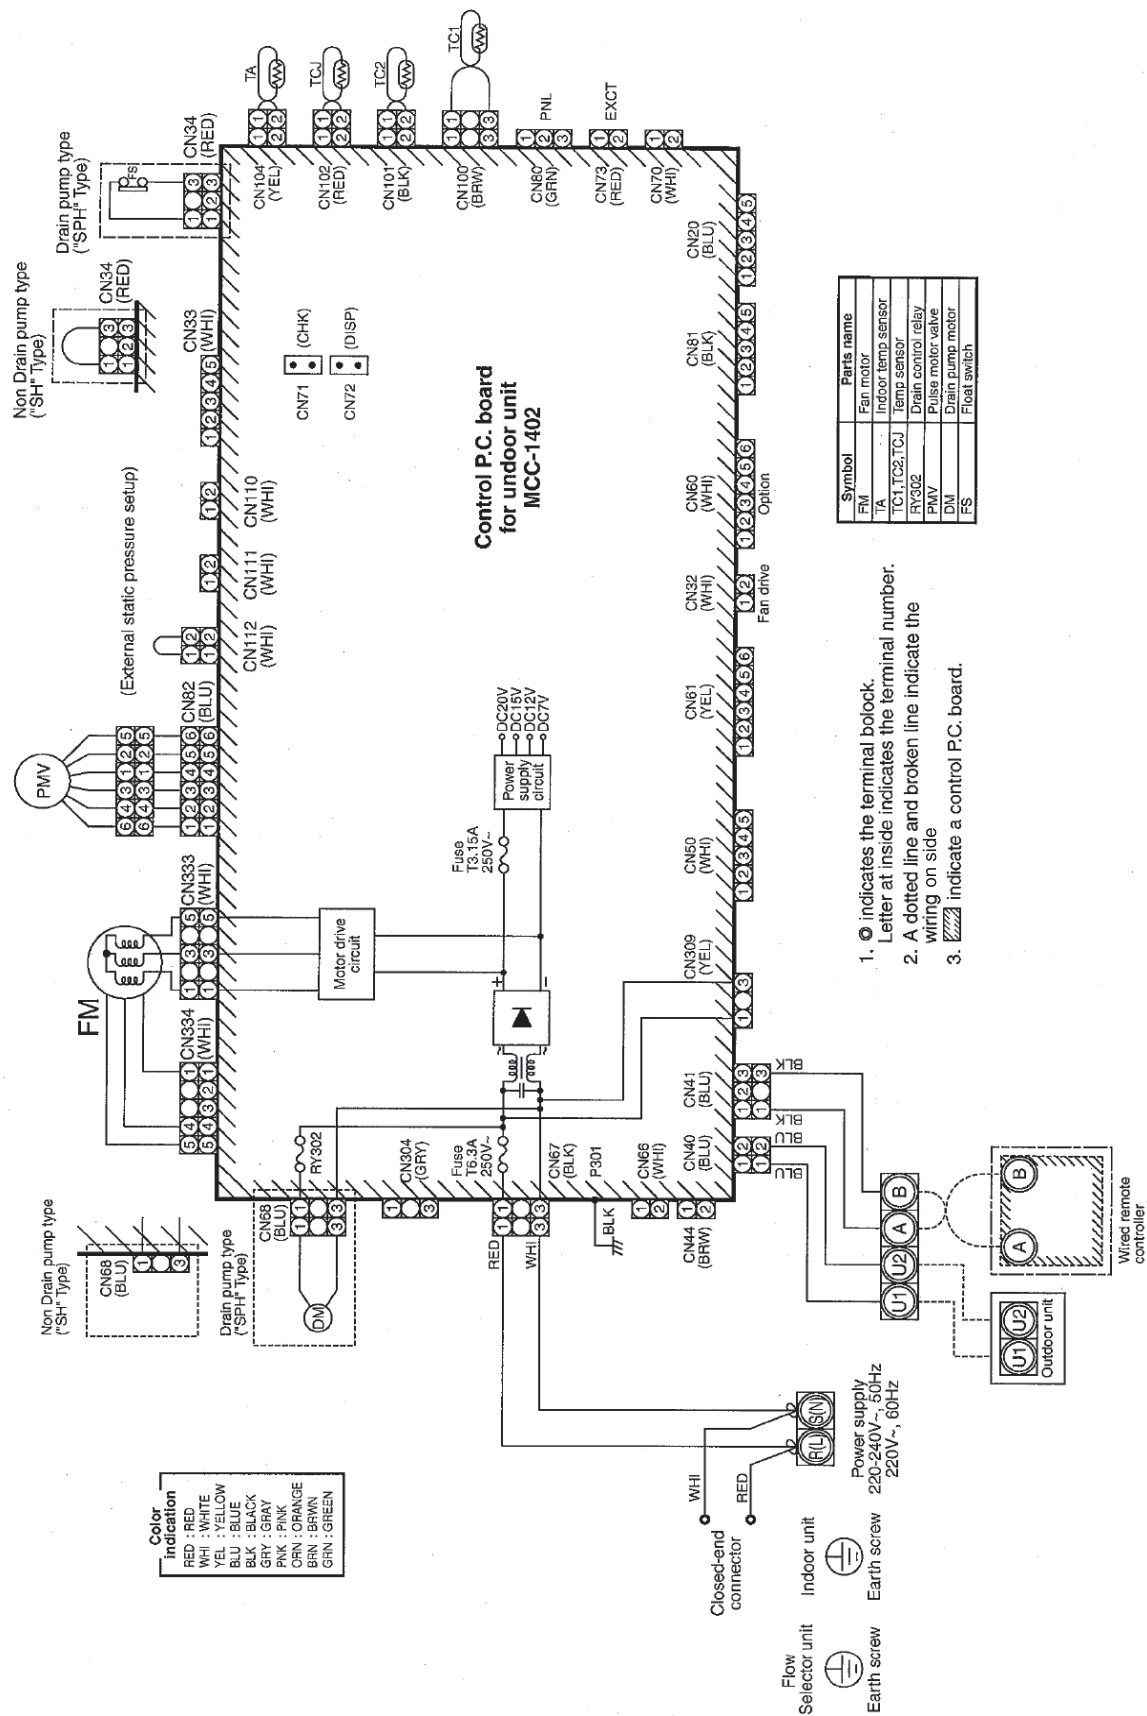


6. Fan characteristics


MMD-AP0071SPH
MMD-AP0091SPH

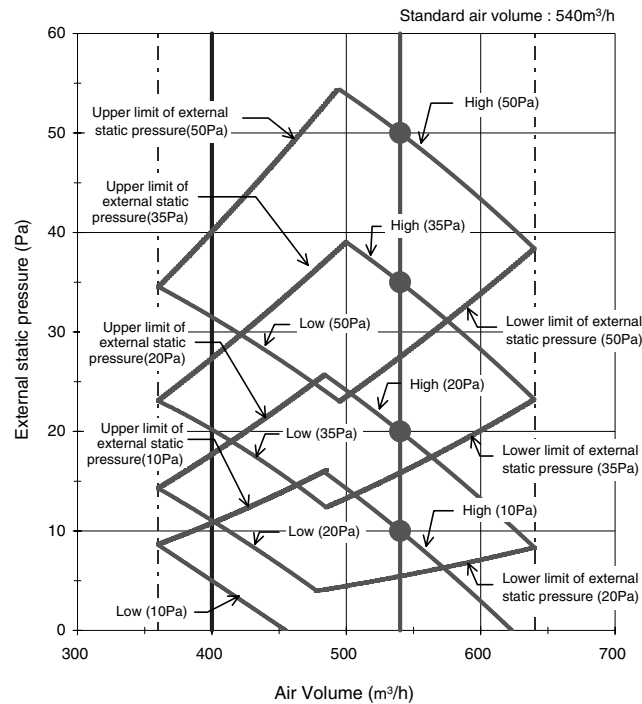


MMD-AP0121SPH

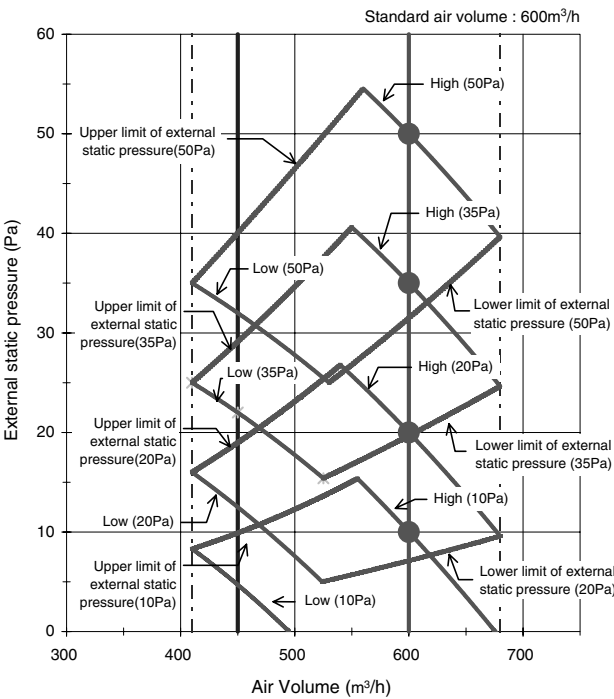

MMD-AP0151SPH

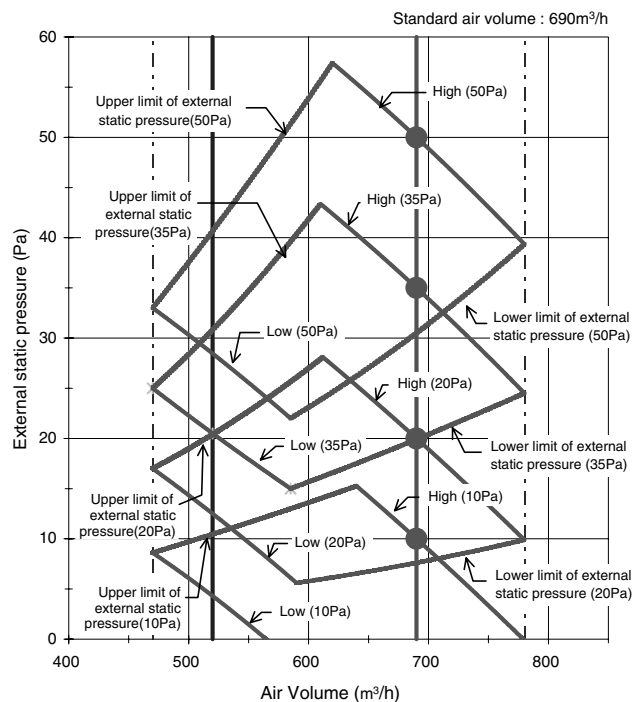

MMD-AP0181SPH

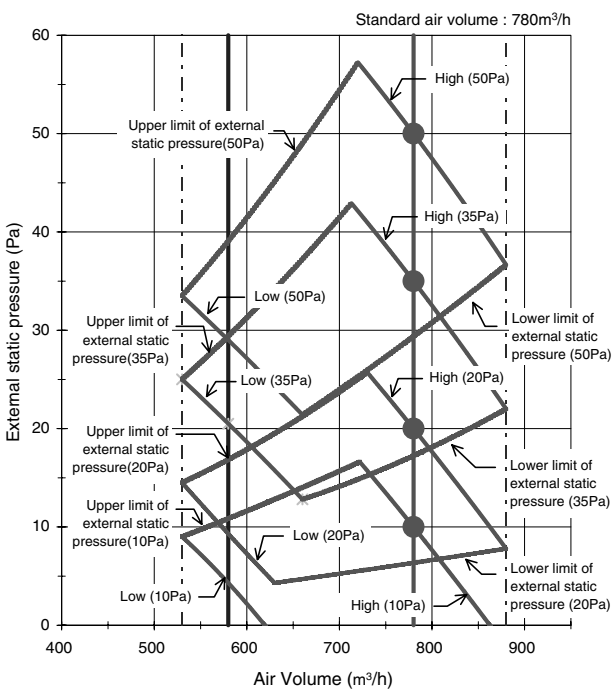


6. Fan characteristics


(Filter attached)

MMD-AP0071SPH


MMD-AP0091SPH

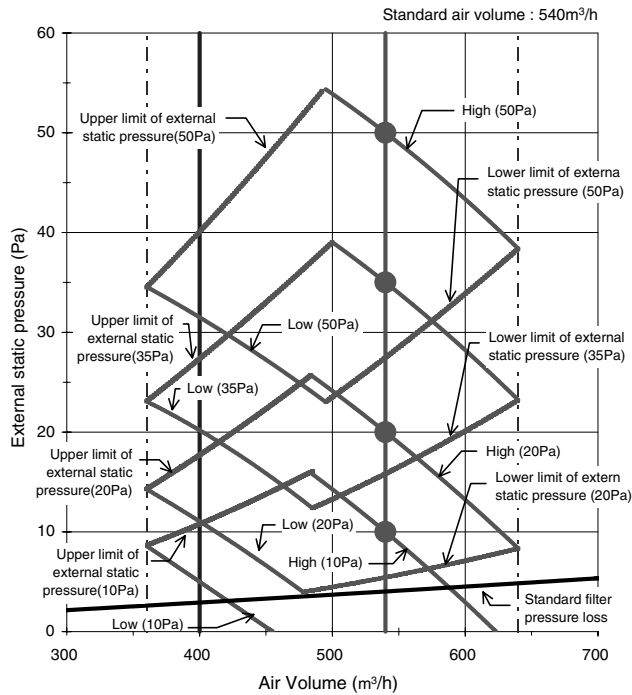


MMD-AP0121SPH

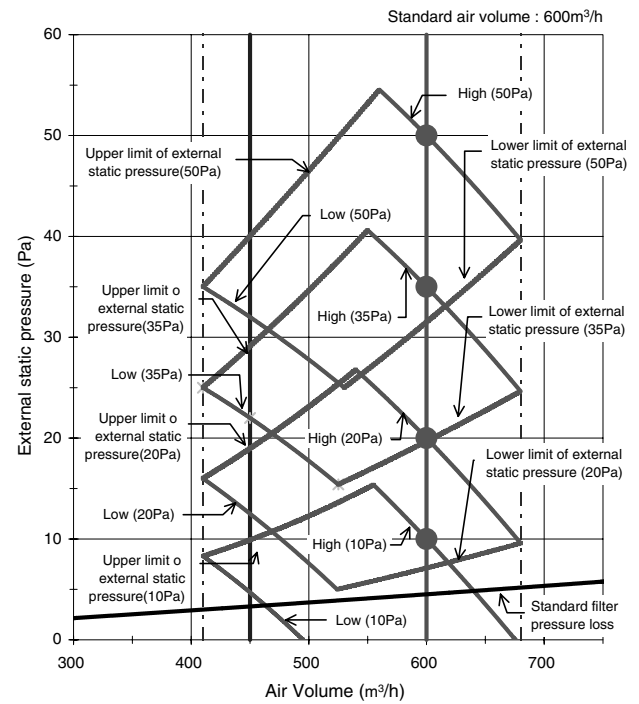

MMD-AP0151SPH

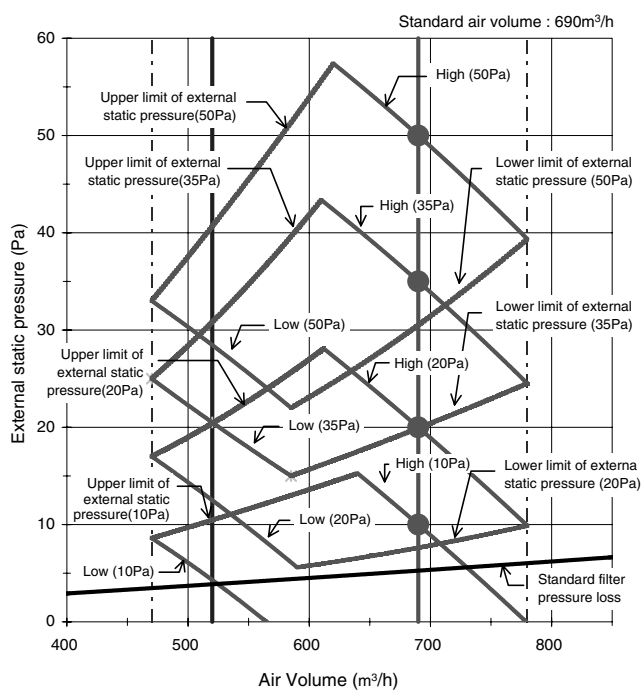

MMD-AP0181SPH

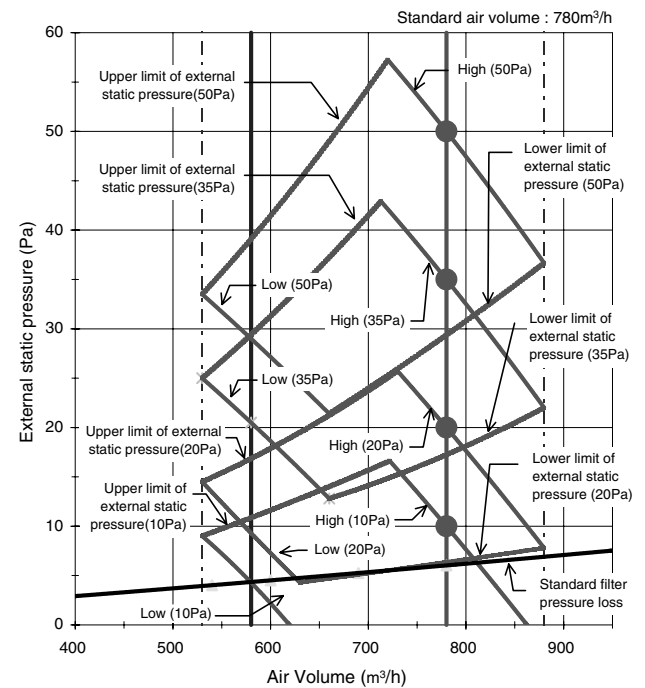


6. Fan characteristics


CHINA model (Filter attached)

MMD-AP0071SPH-C, SH-C


MMD-AP0091SPH-C, SH-C

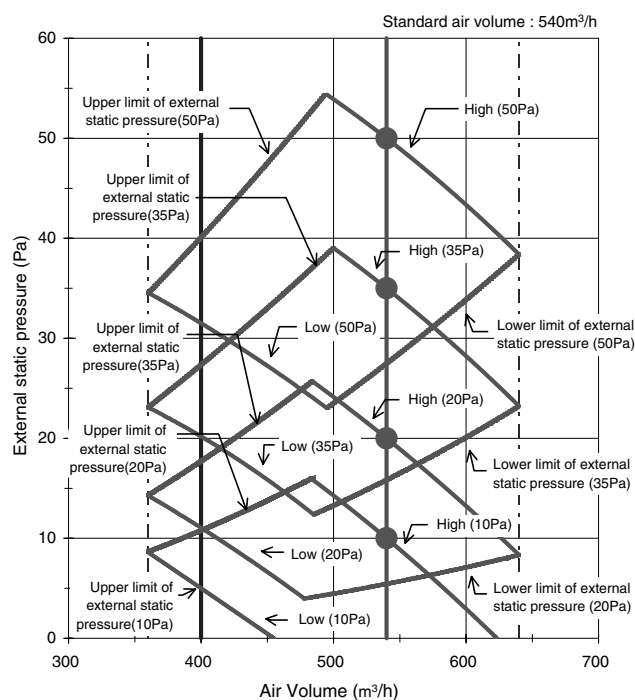


MMD-AP0121SPH-C, SH-C

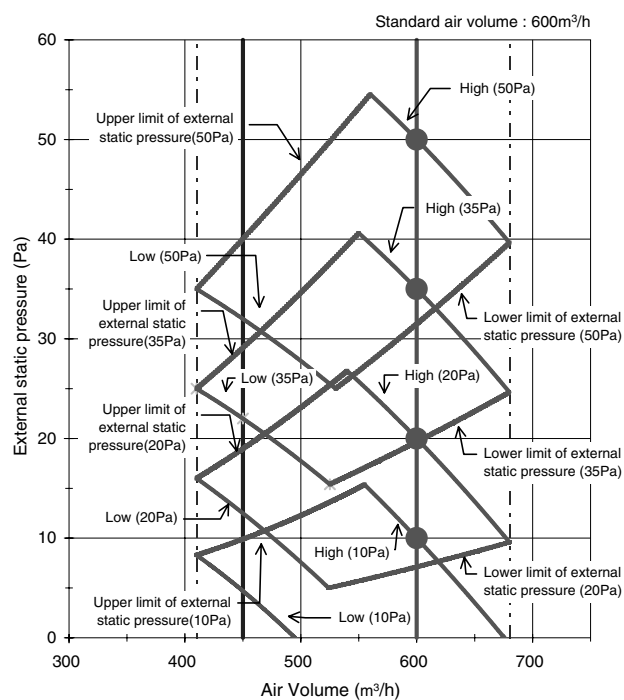

MMD-AP0151SPH-C, SH-C

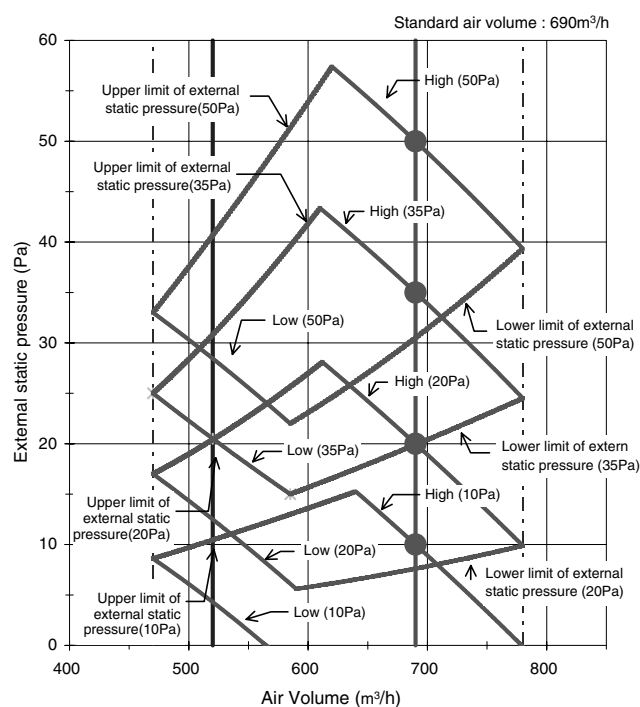

MMD-AP0181SPH-C, SH-C

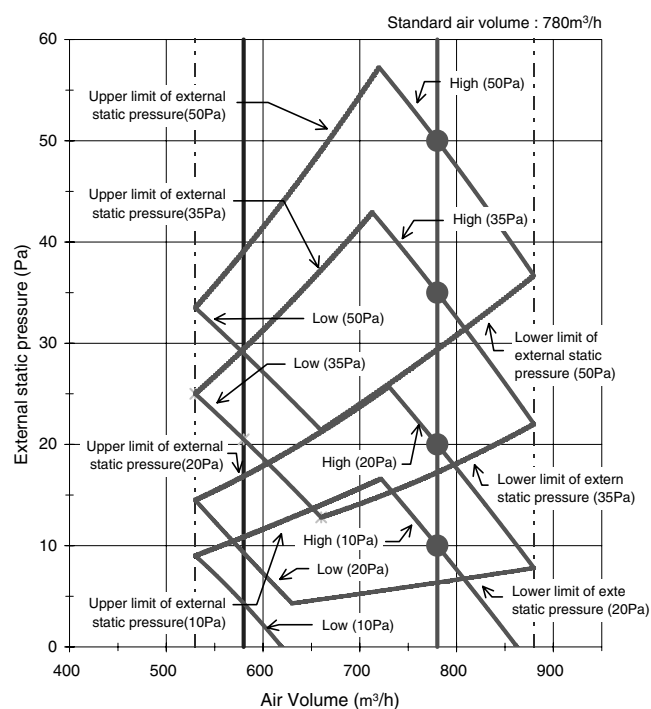


7. Sound Characteristics (NC Curve)

MMD-AP0071SPH/SH ,
MMD-AP0091SPH/SH


Measuring location

Rear air intake

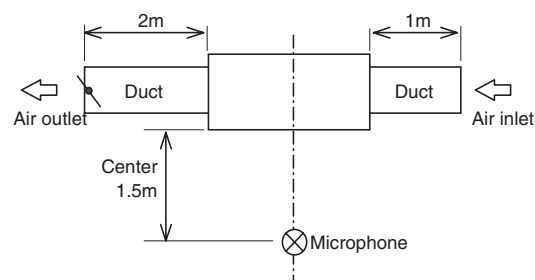


External static pressure 10Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	28	26	24

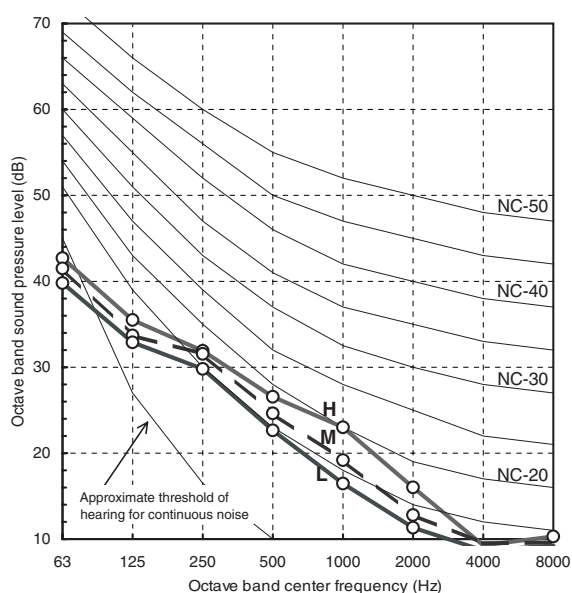


External static pressure 20Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	29	27	25

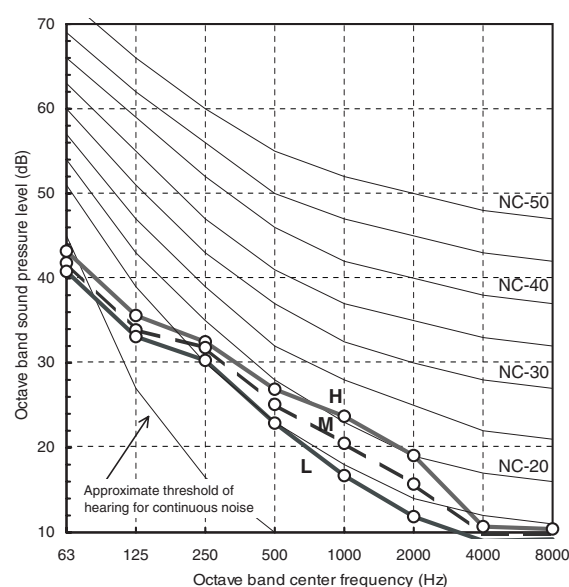


External static pressure 35Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	30	28	26

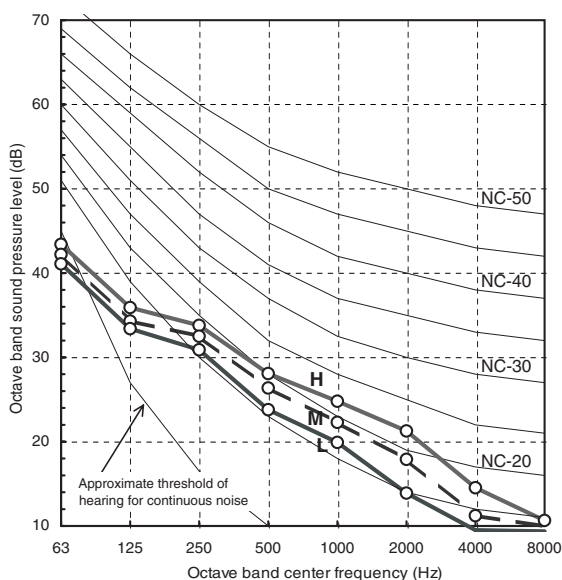

External static pressure 50Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	32	29	27

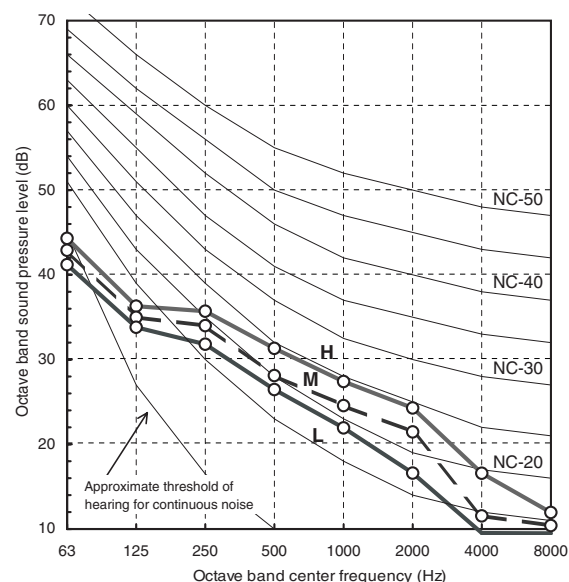


7. Sound Characteristics (NC Curve)

MMD-AP0121SPH/SH


Measuring location

Rear air intake

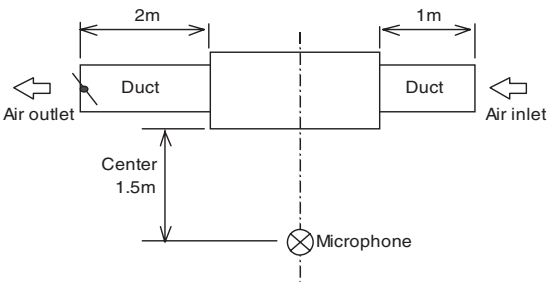


External static pressure 10Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	29	27	25

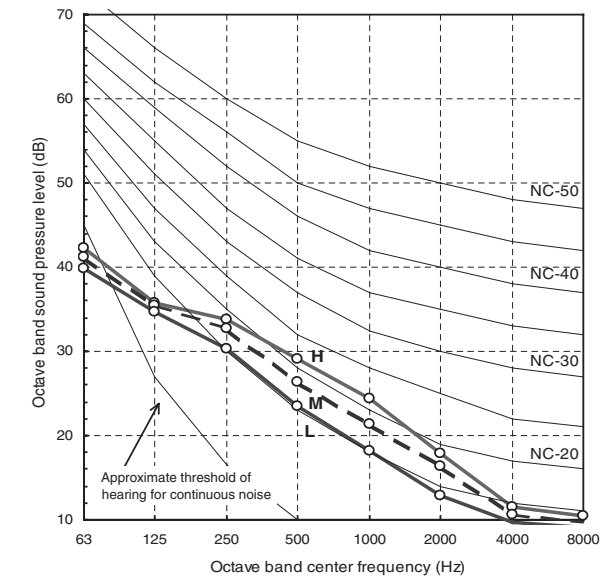


External static pressure 20Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	30	28	26

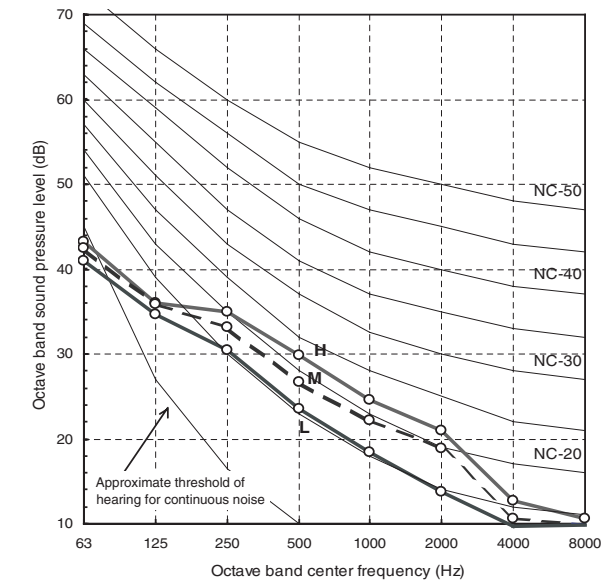


External static pressure 35Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	31	29	27

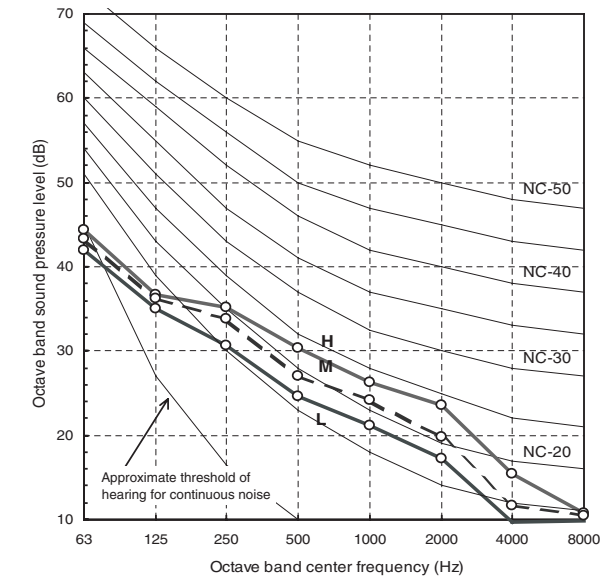

External static pressure 50Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	32	30	28

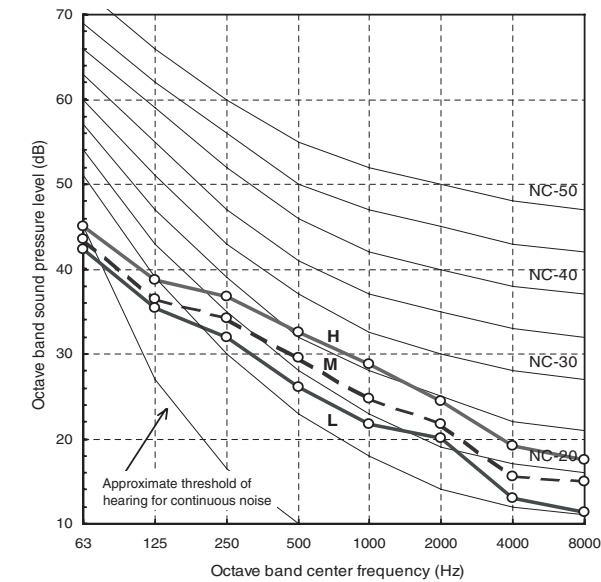


7. Sound Characteristics (NC Curve)

MMD-AP0151SPH/SH


Measuring location

Rear air intake

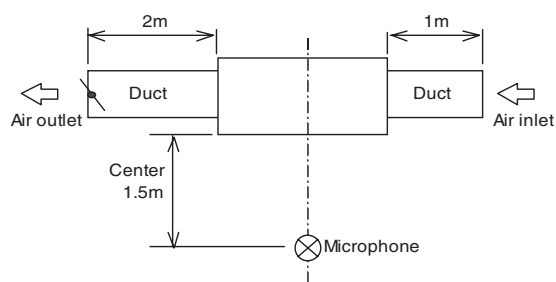


External static pressure 10Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	32	30	28

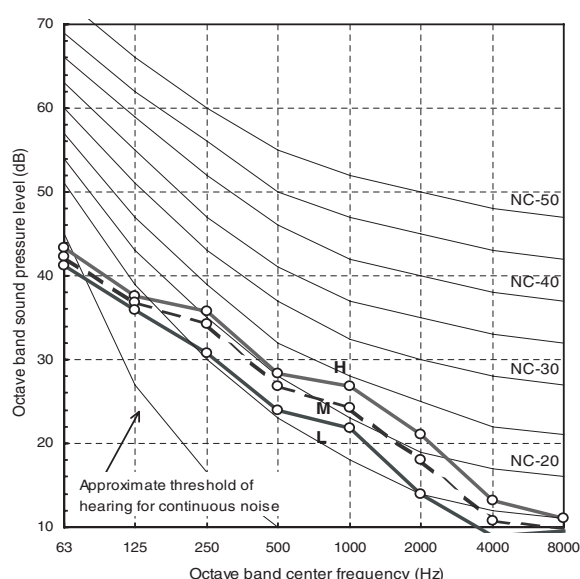


External static pressure 20Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	33	31	29

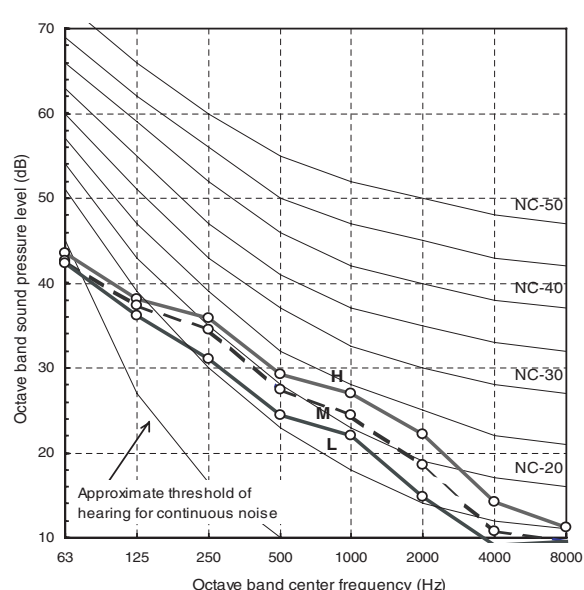


External static pressure 35Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	34	32	30

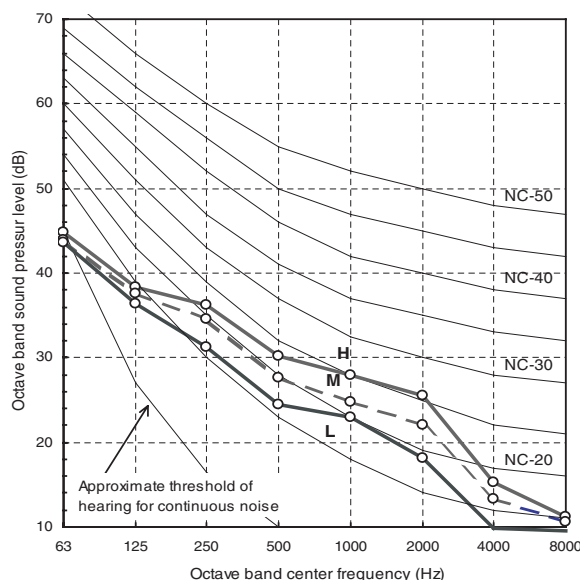

External static pressure 50Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	35	33	31

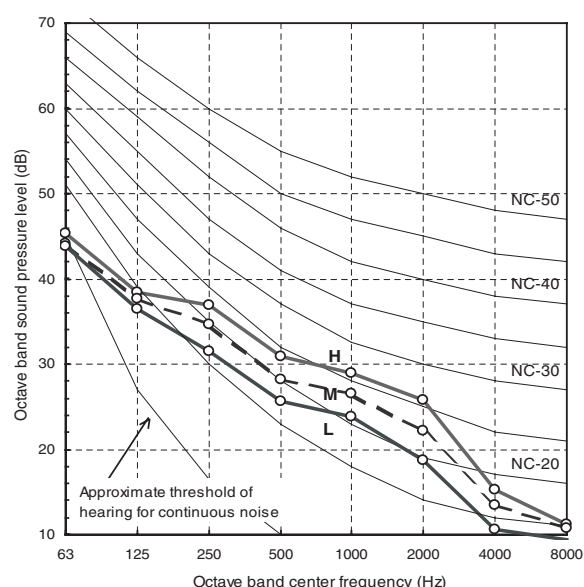


7. Sound Characteristics (NC Curve)

MMD-AP0181SPH/SH


Measuring location

Rear air intake

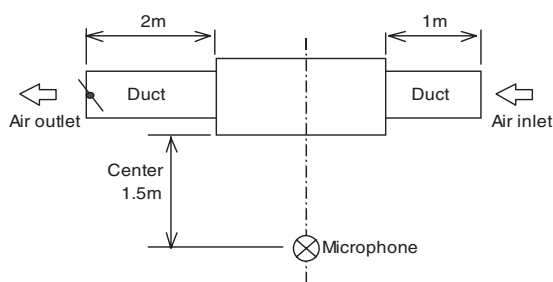


External static pressure 10Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	33	31	29

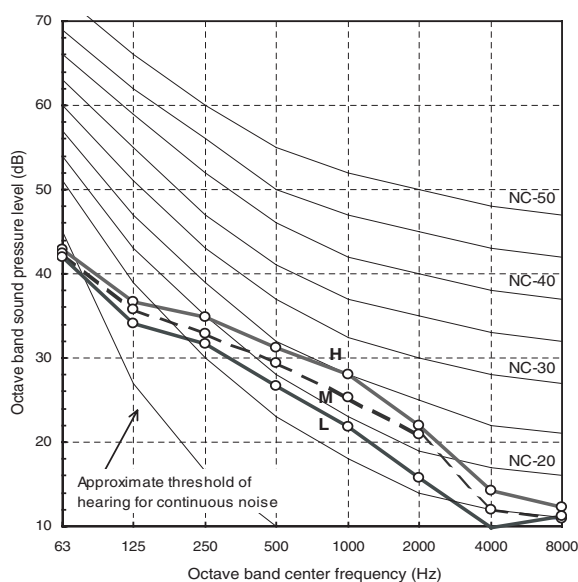


External static pressure 20Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	34	32	30

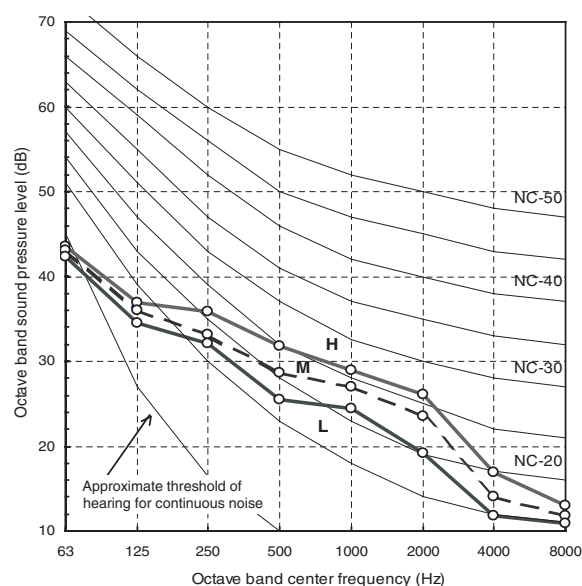


External static pressure 35Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	35	33	31

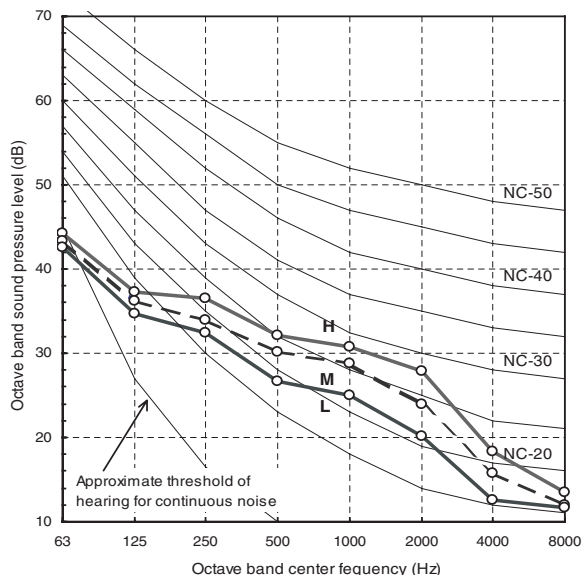

External static pressure 50Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	36	34	32

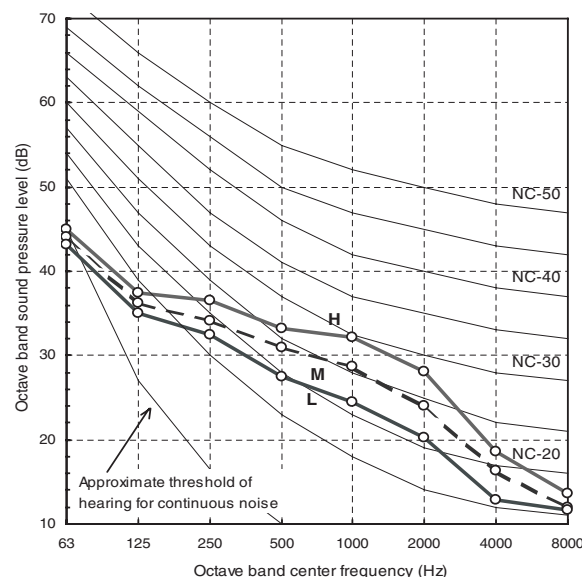


7. Sound Characteristics (NC Curve)

MMD-AP0071SPH/SH ,
MMD-AP0091SPH/SH


Measuring location

Under air intake

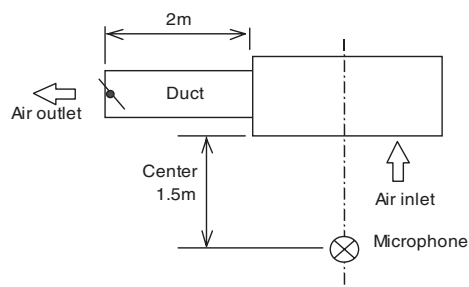


External static pressure 10Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	36	33	30

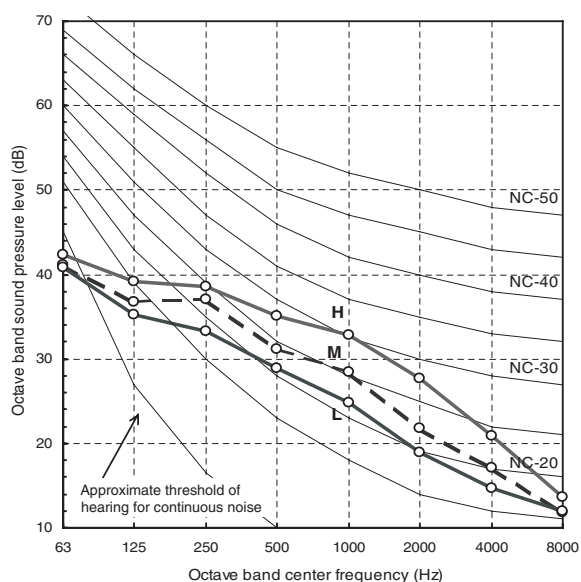


External static pressure 20Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	37	34	31

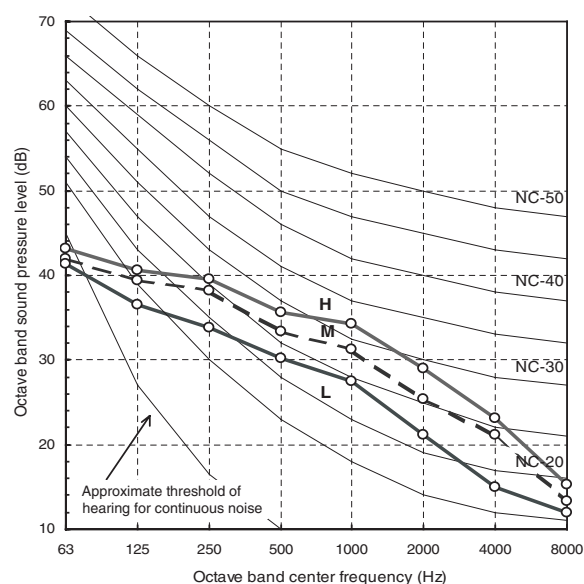


External static pressure 35Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	39	36	33

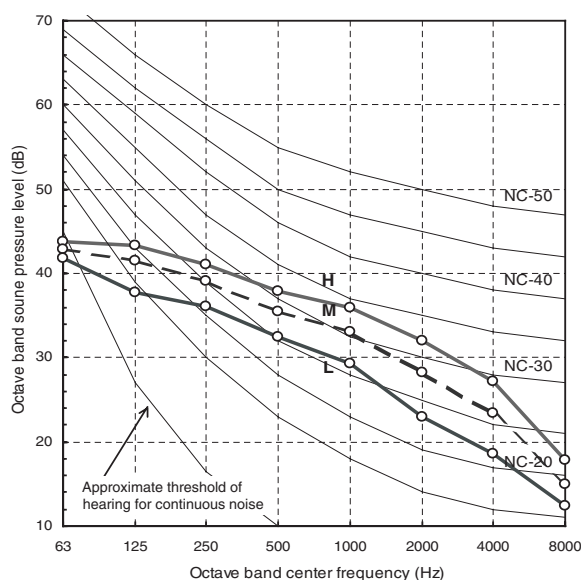

External static pressure 50Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	41	38	35

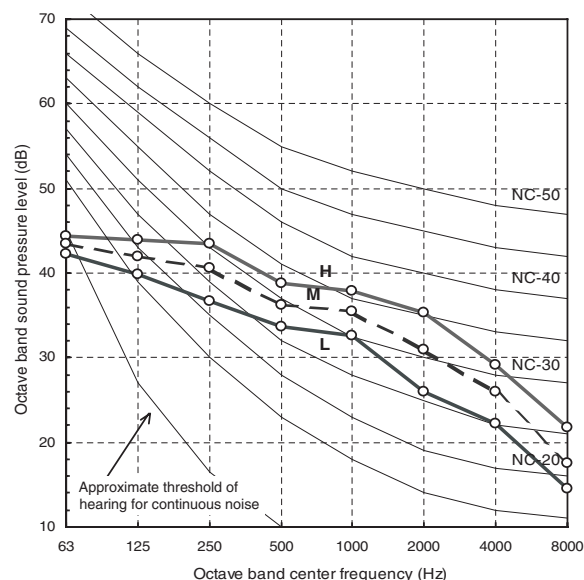


7. Sound Characteristics (NC Curve)

MMD-AP0121SPH/SH


Measuring location

Under air intake

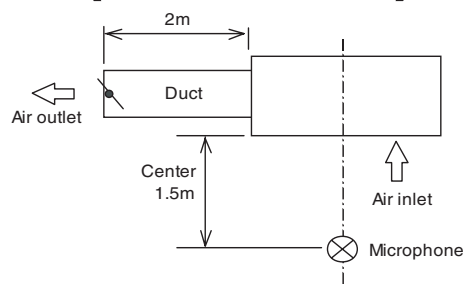


External static pressure 10Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	38	35	32

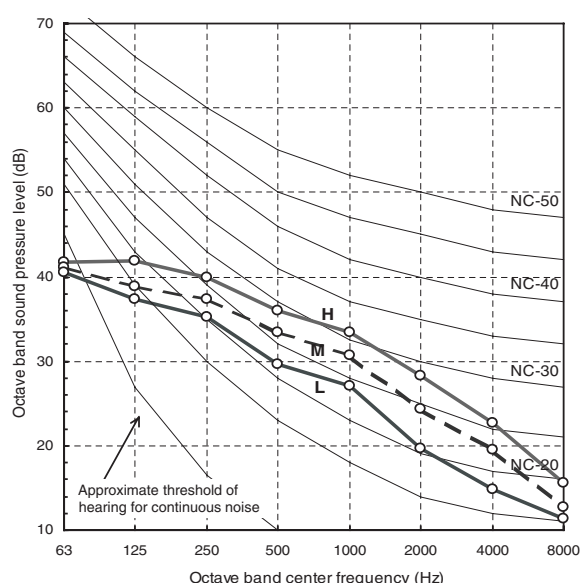


External static pressure 20Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	39	36	33

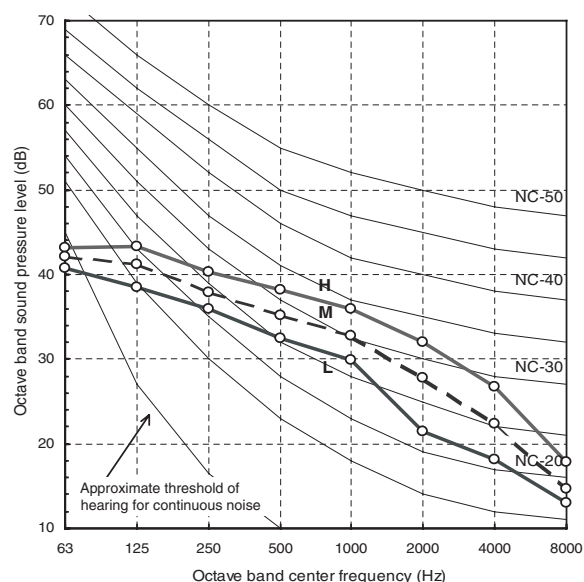


External static pressure 35Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	41	38	35

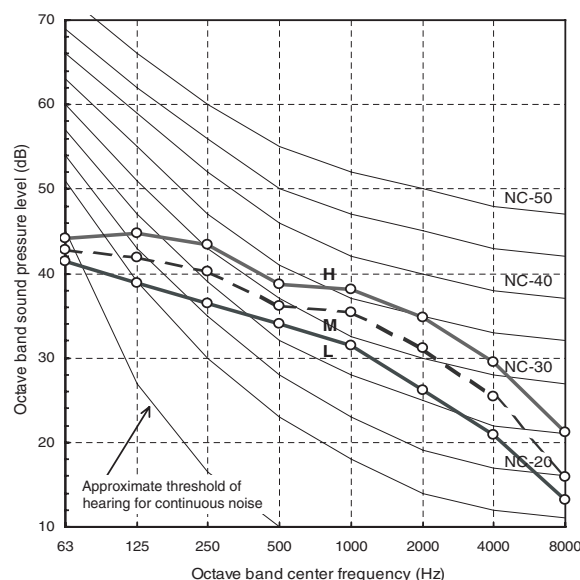

External static pressure 50Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	43	40	37

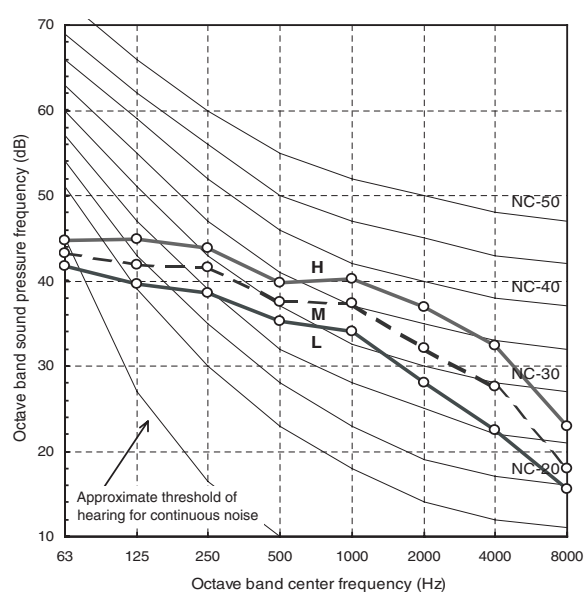


7. Sound Characteristics (NC Curve)

MMD-AP0151SPH/SH


Measuring location

Under air intake

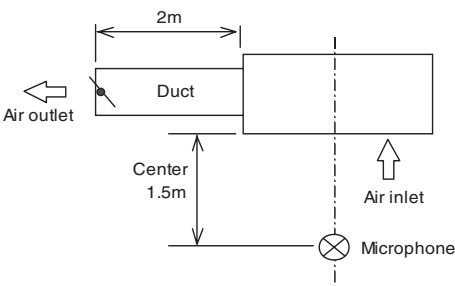


External static pressure 10Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	39	36	33

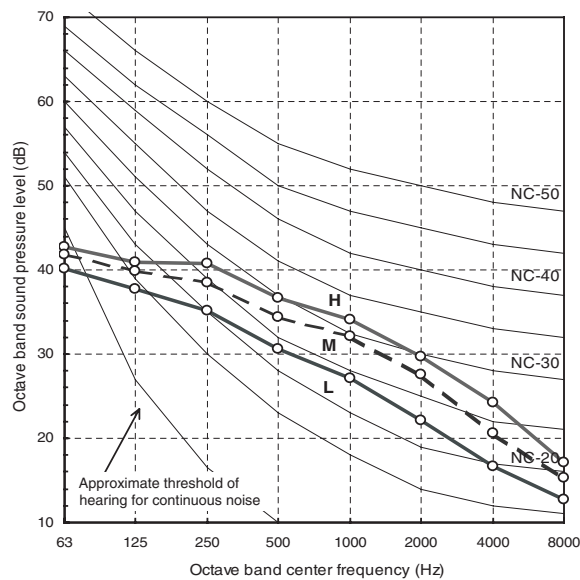


External static pressure 20Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	40	37	34

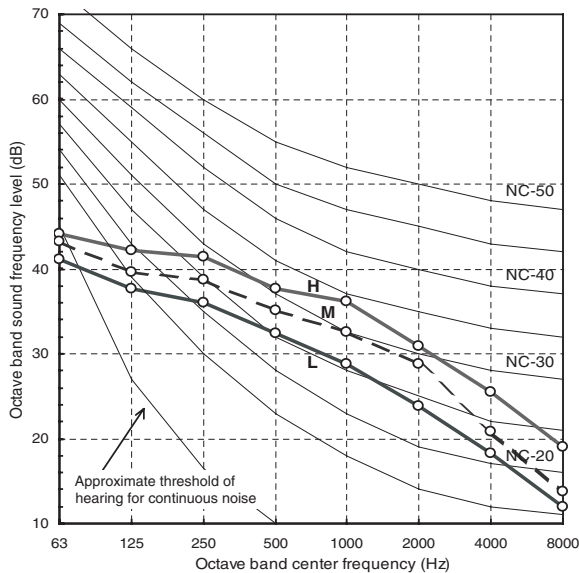


External static pressure 35Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	41	38	35

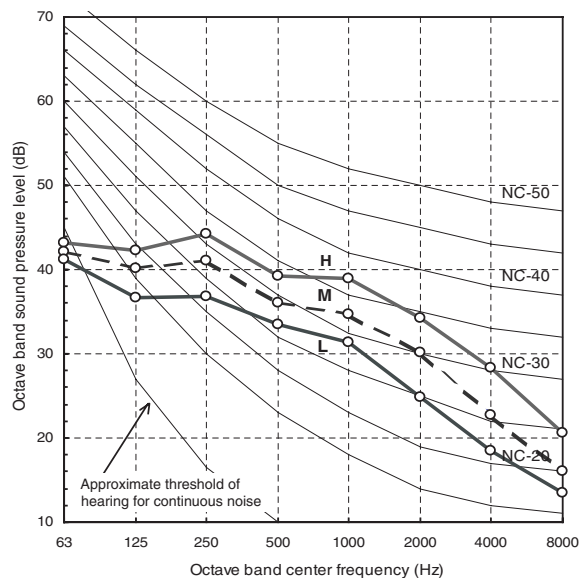

External static pressure 50Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	43	40	37

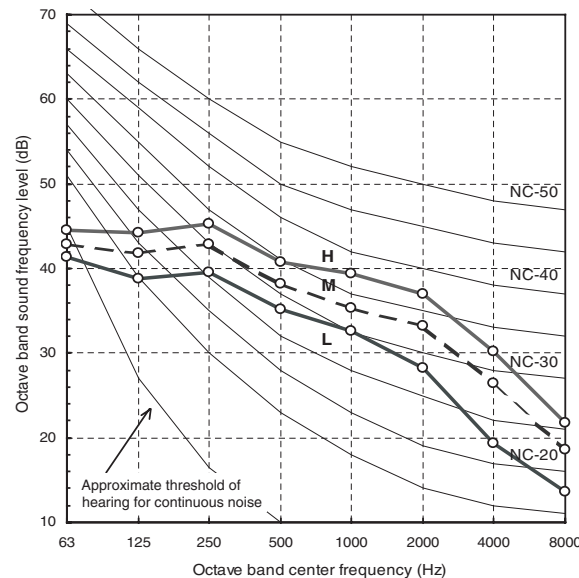


7. Sound Characteristics (NC Curve)

MMD-AP0181SPH/SH


Measuring location

Under air intake

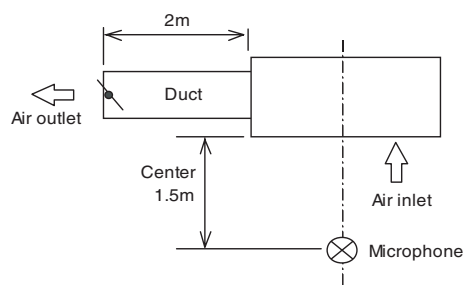


External static pressure 10Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	40	38	36

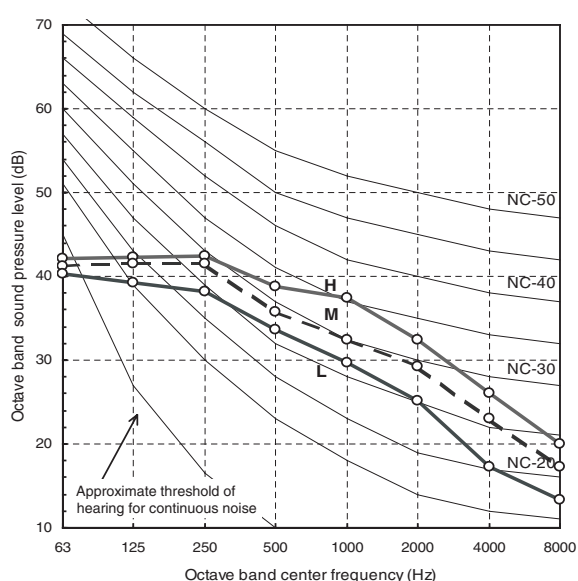


External static pressure 20Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	42	40	37

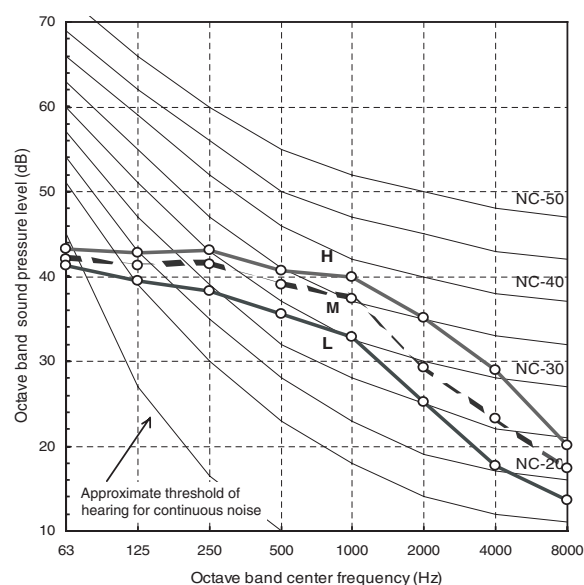


External static pressure 35Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	43	41	38

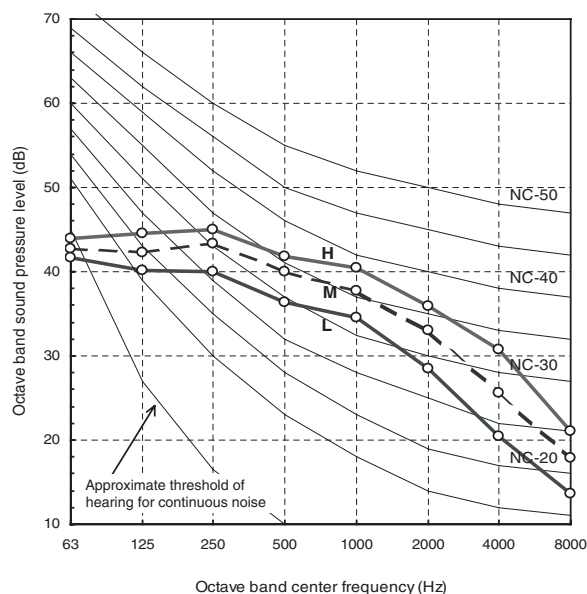

External static pressure 50Pa

Fan tap	H	M	L
Sound pressure level (dB(A))	44	42	39

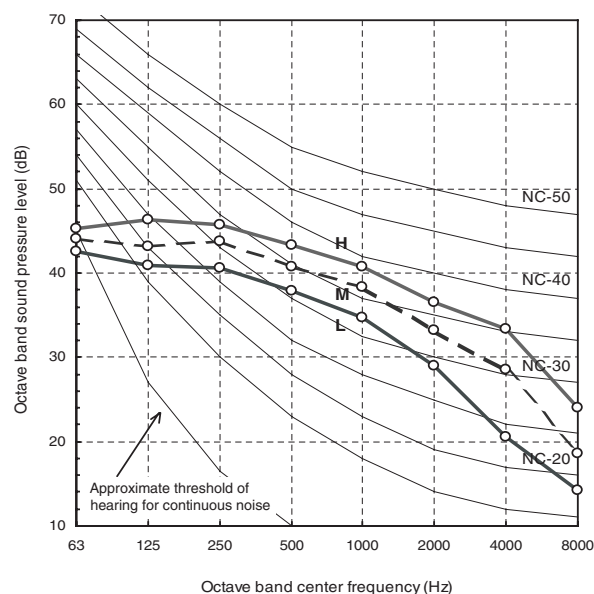

8. Fresh air intake (Design guide)

■ Slim Duct Type

MMD-AP0071SPH, AP0091SPH, AP0121SPH
MMD-AP0071SPH-C, AP0091SPH-C, AP0121SPH-C
MMD-AP0071SH-C, AP0091SH-C, AP0121SH-C

Caution

The fresh air shall be conditioned by heat reclaim ventilator or similar.

Ensure the fresh air volume is determined so that mixed suction air and fresh air maintain the operating temperature.

*1. Recommended conditioned air temperature is 12 °C to 30 °C.

However, Make a fresh air volume within 20% of standard.



Model name	MMD-	AP0071SPH AP0071SPH-C AP0071SH-C	AP0091SPH AP0091SPH-C AP0091SH-C	AP0121SPH AP0121SPH-C AP0121SH-C
Standard air flow	(m3/h)	540	540	600

Install a air filter within the fresh air duct.

(Fresh air does not pass through the filter of Indoor unit.)

Insulate the fresh air duct.

Electrically connect the fan of the Heat exchanger unit and the Indoor unit to a single isolator.

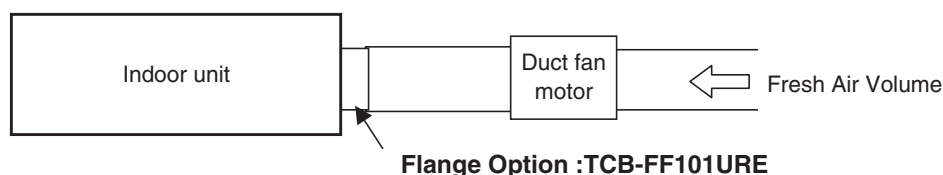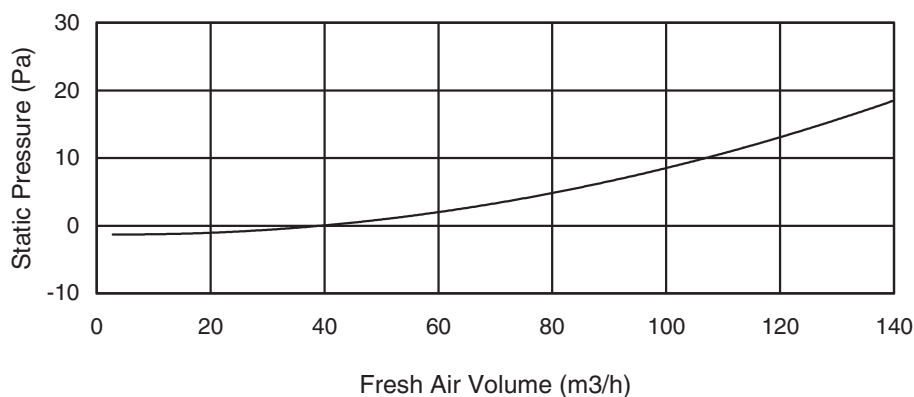

Inter - lock circuit

Connect the driving relay of the duct fan (DC 12V) between 1 and 6 on the indoor P.C. board.

(Rated current of the relay for duct fan should be up to 75mA.)

After installation, carry out a trial operation to check that the duct fan of the indoor unit start/stop simultaneously.

(Carry out the trial operation following the installation manual of the indoor unit.)

8. Fresh air intake (Design guide)

■ Slim Duct Type **MMD-AP0151SPH, AP0181SPH**
 MMD-AP0151SPH-C, AP0181SPH-C
 MMD-AP0151SH-C, AP0181SH-C


Caution

The fresh air shall be conditioned by heat reclaim ventilator or similar.
Ensure the fresh air volume is determined so that mixed suction air and fresh air maintain the operating temperature.

*1. Recommended conditioned air temperature is 12 °C to 30 °C.
However, Make a fresh air volume within 20% of standard.

Model name	MMD-	AP0151SPH AP0151SPH-C AP0151SH-C	AP0181SPH AP0181SPH-C AP0181SH-C
Standard air flow	(m³/h)	690	780

Install a air filter within the fresh air duct.
(Fresh air does not pass through the filter of Indoor unit.)
Insulate the fresh air duct.
Electrically connect the fan of the Heat exchanger unit and the Indoor unit to a single isolator.

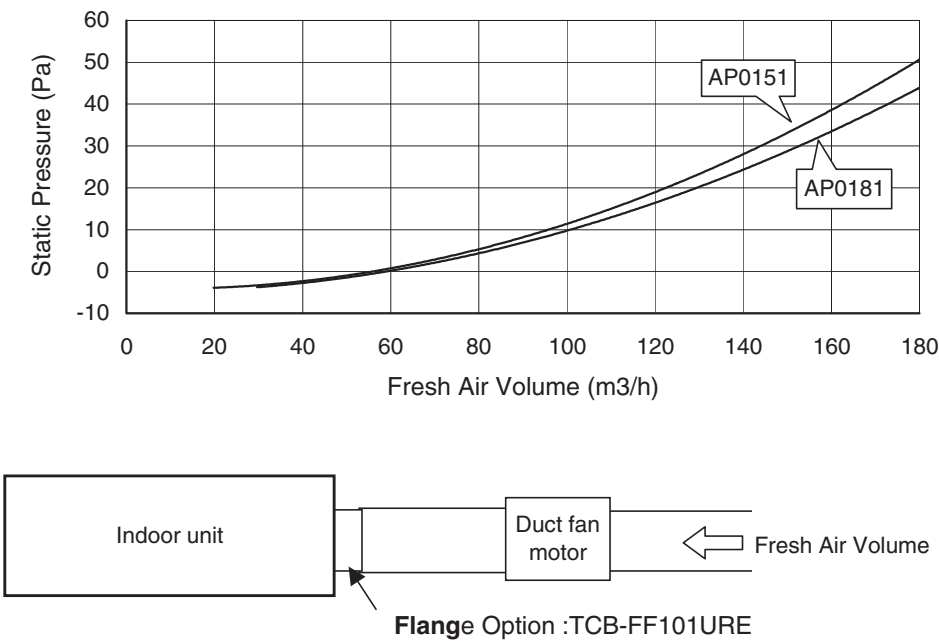

Inter - lock circuit

Connect the driving relay of the duct fan (DC 12V) between 1 and 6 on the indoor P.C. board.
(Rated current of the relay for duct fan should be up to 75mA.)
After installation, carry out a trial operation to check that the duct fan of the indoor unit start/stop simultaneously.
(Carry out the trial operation following the installation manual of the indoor unit.)